

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

- › [VIVIBRIGHT](#) /
- › [VIVIBRIGHT D5000 WiFi Bluetooth Projector User Manual](#)

VIVIBRIGHT D5000


VIVIBRIGHT D5000 WiFi Bluetooth Projector User Manual

Model: **D5000** | Brand: **VIVIBRIGHT**

1. INTRODUCTION AND OVERVIEW

The VIVIBRIGHT D5000 is a native 1080P Full HD projector designed to deliver an immersive home theater and outdoor movie experience. It supports 4K video input and features advanced connectivity options, including WiFi for seamless screen mirroring and Bidirectional Bluetooth 5.1 for versatile audio connections. Equipped with a powerful 10W stereo speaker, the D5000 ensures high-fidelity sound to complement its vivid projection.


This manual provides detailed instructions for setting up, operating, and maintaining your VIVIBRIGHT D5000 projector, along with troubleshooting tips to ensure optimal performance.

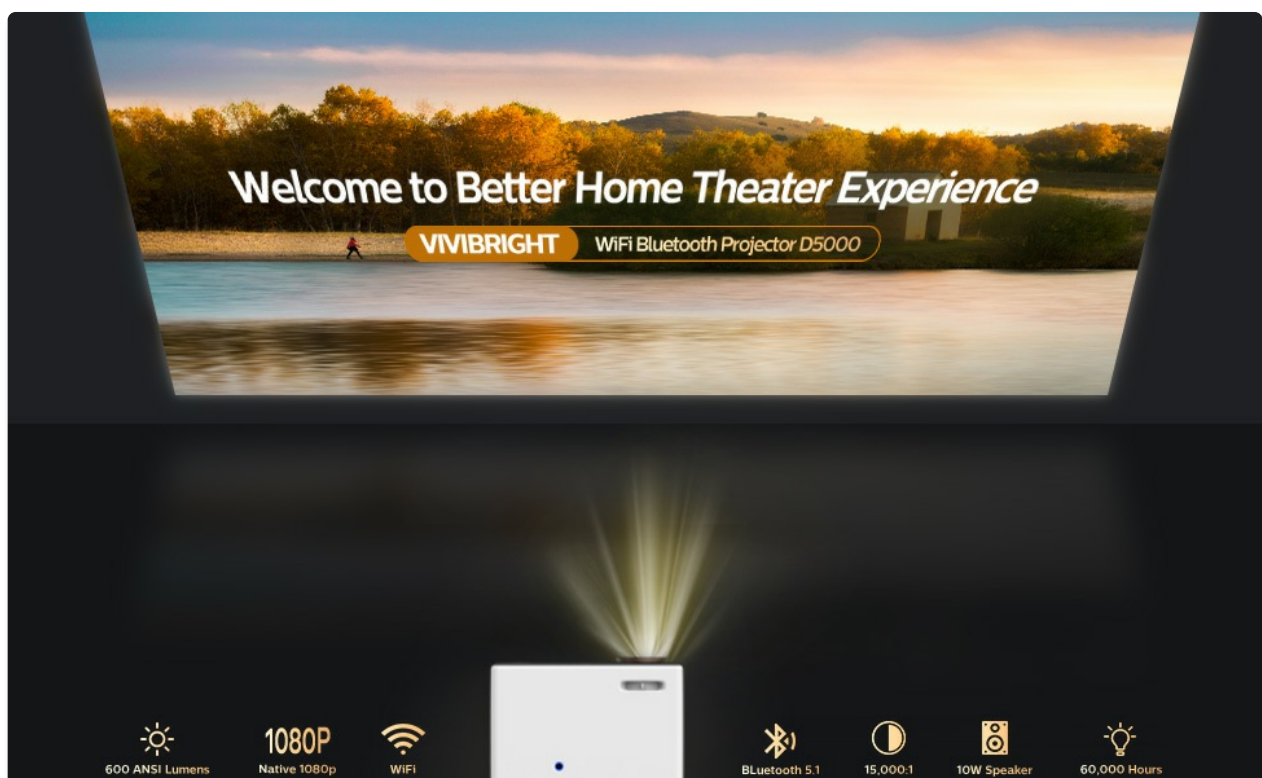

2. PRODUCT FEATURES

- **5.1 Bidirectional Bluetooth & WiFi Connection:** This projector features two-way Bluetooth technology, allowing it to connect wirelessly to external speakers for enhanced audio or function as a standalone Bluetooth speaker when connected to a mobile phone. The built-in 10W stereo speaker delivers clear, detailed sound. Bluetooth connectivity supports headphones, speakers, and AirPods.
- **Native 1080P Full HD & 600 ANSI Lumens:** Experience crystal-clear visuals with a native resolution of 1920 x 1080P and a high contrast ratio of 10000:1. The projector supports 4K video input, providing vivid images and vibrant colors. With 600 ANSI lumens, it offers clear viewing even in moderately lit environments.
- **WiFi Wireless Screen Mirroring:** Easily synchronize your screen from iOS/Android devices to the large projection. Two methods are available: wireless WiFi connection or a direct USB connection (USB2 port only). Enjoy movies, videos, photos, and games on a larger display.
- **Outdoor Projector & Screen Package:** The projector includes a 100-inch projector screen and a convenient carrying bag, making it ideal for both indoor and outdoor use. It supports a maximum projection size of 300 inches, creating an immersive home theater experience. The diffuse light source design helps reduce eye irritation.
- **Multifunctional Connections:** Equipped with 2 HDMI ports, 2 USB ports, and a VGA port, the projector offers broad compatibility with various devices such as TV sticks, smartphones, laptops, USB drives, and gaming consoles like PS5.

Extreme Visual Performance

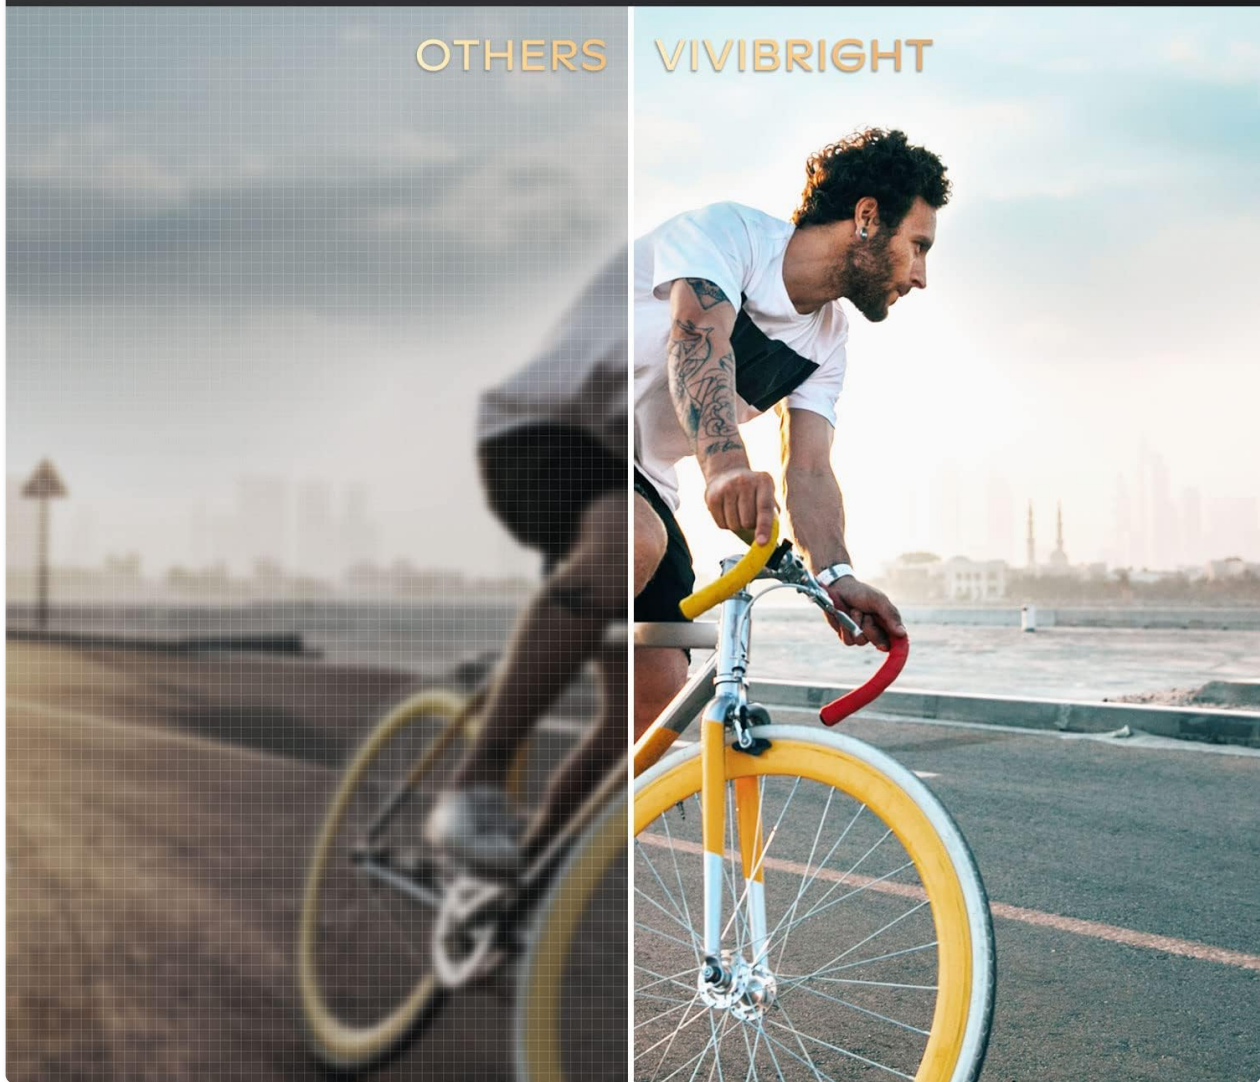

Visual comparison highlighting the superior clarity and performance of the VIVIBRIGHT D5000.



Demonstration of the projector's unique bidirectional Bluetooth technology.

3. PACKAGE CONTENTS


Upon opening your VIVIBRIGHT D5000 projector package, please verify that all the following items are included:

- VIVIBRIGHT D5000 Projector
- Remote Control
- Power Cable
- Carrying Bag
- 100" Fast Stretch Screen
- User Manual (this document)

Expand Your Gaming Universe




USB 1



USB 2



HDMI 1



HDMI 2



VGA

All components included with your VIVIBRIGHT D5000 projector.

4. SETUP GUIDE

4.1 Initial Setup

1. Place the projector on a stable, flat surface or mount it securely. Ensure there is adequate ventilation around the unit.
2. Connect the power cable to the projector and then to a power outlet.
3. Press the power button on the projector or remote control to turn it on.

4.2 Focus Adjustment

To achieve a clear and sharp image, adjust the focus wheel located on the projector. Rotate the wheel until the projected image appears crisp and well-defined on your screen or wall.



Adjusting the focus for a clear image.

4.3 Placement and Projection Size

The VIVIBRIGHT D5000 can project an image up to 300 inches. The optimal projection distance will vary based on your desired screen size. For example, a 176-inch screen can be achieved at approximately 6.35 meters, and a 200-inch screen at approximately 7.22 meters.

Position the projector to ensure the image is centered and fills your screen. Minor keystone correction can be performed if the image appears trapezoidal.

5. OPERATING INSTRUCTIONS

5.1 Power On/Off

- **Power On:** Press the power button on the projector or the remote control. The indicator light will turn blue.
- **Power Off:** Press the power button again. The projector will shut down, and the indicator light will turn off.

5.2 Wired Connectivity

The projector offers multiple ports for connecting various devices:

- **HDMI Ports (HDMI 1, HDMI 2):** Connect devices such as TV sticks, gaming consoles (PS5), laptops, and Blu-ray players using an HDMI cable. Select the corresponding HDMI input source from the projector's menu.
- **USB Ports (USB 1, USB 2):** Insert USB flash drives to play media files directly. USB2 also supports wired screen mirroring for compatible devices.
- **VGA Port:** Connect older computers or laptops using a VGA cable.



Overview of the projector's versatile connectivity options.


5.3 Wireless Connectivity

5.3.1 WiFi Screen Mirroring

To mirror your smartphone or tablet screen wirelessly:

1. Ensure your mobile device and the projector are connected to the same WiFi network.
2. On the projector, select the 'Screen Mirroring' or 'Wireless Display' option from the main menu.
3. On your mobile device, enable screen mirroring (e.g., 'Smart View' for Android, 'Screen Mirroring' for iOS) and select the projector from the list of available devices.

Multi-platform Casting from Many Devices

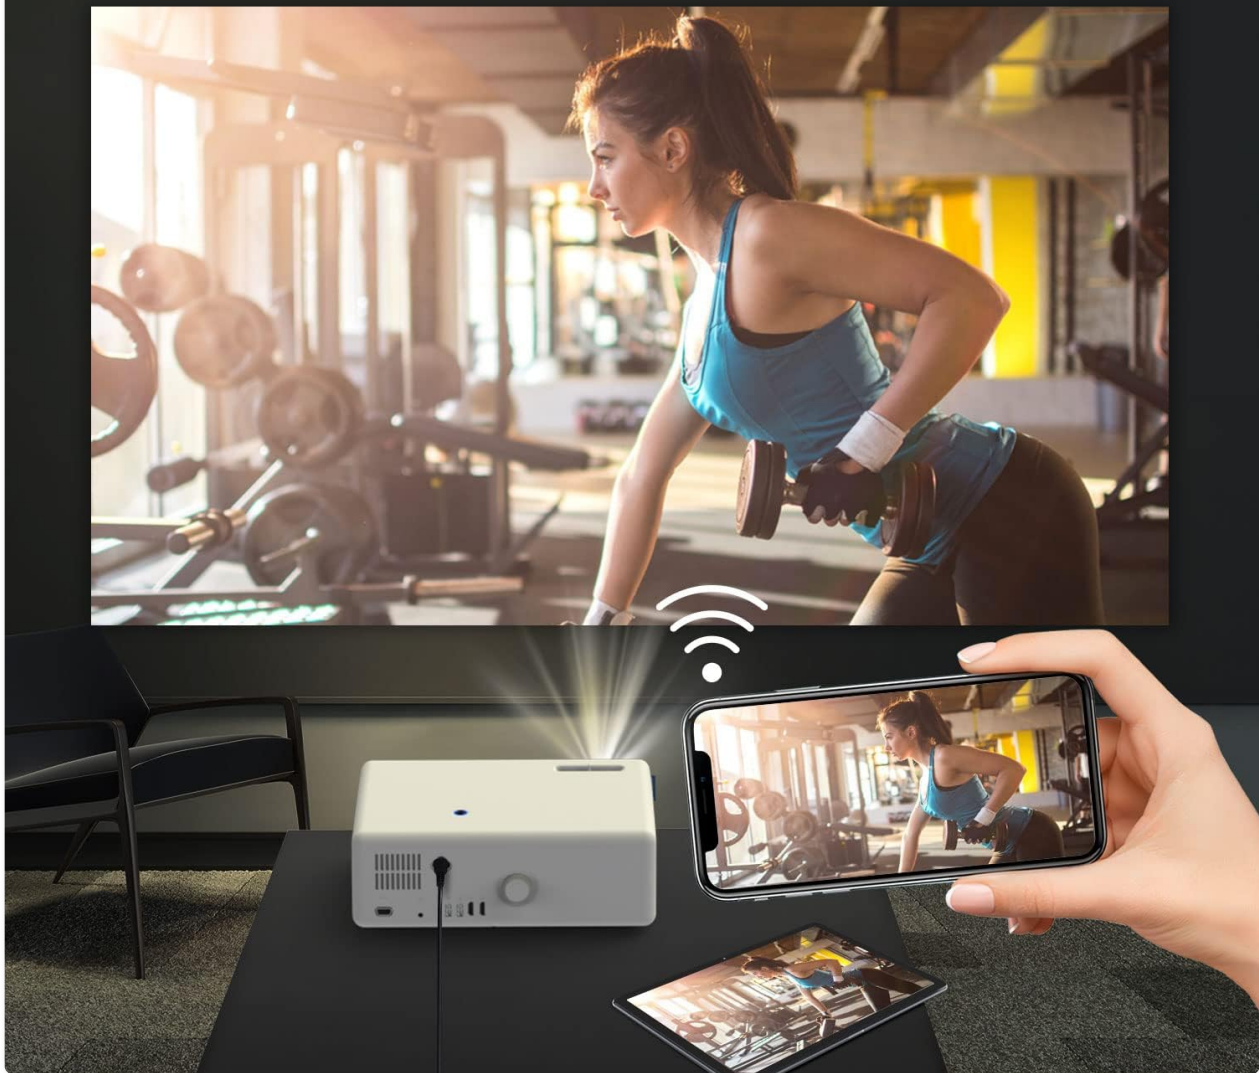

Wireless screen mirroring from a mobile device to the projector.

5.3.2 Bluetooth Connection

The bidirectional Bluetooth allows for flexible audio setup:

- **Connecting to External Bluetooth Speakers/Headphones:** Enable Bluetooth on the projector and your audio device. Pair them from the projector's Bluetooth settings menu.
- **Using Projector as a Bluetooth Speaker:** Connect your smartphone or other Bluetooth-enabled device to the projector. The projector's built-in 10W speaker will play audio from your connected device.



The projector's main view, highlighting its WiFi and Bluetooth capabilities.

5.4 Audio Output

The projector features a built-in 10W stereo speaker for direct audio playback. For a more immersive experience, you can connect external speakers or a soundbar via Bluetooth or the 3.5mm audio output port.

6. MAINTENANCE

- **Lens Cleaning:** Use a soft, lint-free cloth specifically designed for optical lenses to gently clean the projector lens. Avoid using abrasive cleaners or excessive force.
- **Ventilation:** Ensure the projector's ventilation vents are clear and unobstructed to prevent overheating. Do not place the projector on soft surfaces that may block airflow.
- **Storage:** When not in use, store the projector in its provided carrying bag in a cool, dry place to protect it from dust and damage.

7. TROUBLESHOOTING

If you encounter issues with your VIVIBRIGHT D5000 projector, please refer to the following common

problems and solutions:

- **No Image/Power:**
 - Check if the power cable is securely connected to both the projector and the power outlet.
 - Ensure the power button has been pressed.
 - Verify the power outlet is functional.
- **Blurry Image:**
 - Adjust the focus wheel until the image is clear.
 - Ensure the projection distance is within the recommended range.
 - Clean the projector lens if it is dirty.
- **No Sound:**
 - Check the volume settings on both the projector and the connected source device.
 - If using external speakers, ensure they are properly connected and powered on.
 - If using Bluetooth, ensure the projector is correctly paired with the audio device.
- **Connection Issues (HDMI/USB/VGA):**
 - Ensure the cables are securely connected to both the projector and the source device.
 - Verify that the correct input source is selected on the projector.
 - Try a different cable or port if available.
- **WiFi Screen Mirroring Not Working:**
 - Ensure both the projector and your mobile device are connected to the same WiFi network.
 - Restart both devices and try connecting again.
 - Check for any software updates for your mobile device or projector.

8. SPECIFICATIONS

Feature	Specification
Brand	VIVIBRIGHT
Model	D5000 WiFi Bluetooth
Display Resolution	1920 x 1080 (Native Full HD)
Brightness	600 ANSI Lumens
Contrast Ratio	10000:1
Speaker Type	Stereo (10W)
Connectivity Technology	VGA, Bluetooth, USB (x2), HDMI (x2), WiFi
Special Features	Wireless, Portable, Built-In Wi-Fi, Bidirectional Bluetooth
Recommended Uses	Gaming, Home Theater, Outdoor Movies
Item Weight	10.43 pounds

Product Dimensions	12.5 x 9.3 x 4.2 inches
--------------------	-------------------------

9. OFFICIAL PRODUCT VIDEO

Watch the official product video for an in-depth look at the VIVIBRIGHT D5000 projector's features and capabilities.

Your browser does not support the video tag.

This video provides an overview of the VIVIBRIGHT D5000 Full HD Projector, showcasing its design, features, and projection capabilities.

10. WARRANTY AND SUPPORT



VIVIBRIGHT stands behind the quality of its products. The D5000 projector comes with **a2-year warranty** from the date of purchase.




Additionally, we offer **lifetime professional technical support** to assist you with any questions or issues you may encounter. If you require assistance, please do not hesitate to contact our support team. We are committed to responding to all inquiries within 24 hours.

For support, please refer to the contact information provided on the VIVIBRIGHT official website or your purchase documentation.

© 2023 VIVIBRIGHT. All rights reserved.

Related Documents - D5000

	<p>Vivibright f20/f20Pro/f30/f40 Series Projector Owner's Manual</p> <p>Owner's manual for the Vivibright f20, f20Pro, f30, and f40 series projectors, covering setup, operation, safety instructions, specifications, and troubleshooting.</p>
	<p>ViviBright F40 Portable 1080P LCD Projector for Home Theater & Gaming</p> <p>Discover the ViviBright F40, a portable 1080P Full HD LCD projector featuring 4200 Lumens brightness, 15,000:1 contrast, and versatile connectivity including HDMI, USB, and SPDIF. Ideal for home theater, gaming, and presentations with up to a 300-inch screen.</p>

 <p>VIVIBRIGHT VIVIBRIGHT'S GP90 HD theater Projector Fast, fun, portable and ultra-bright</p> <p>Compact video projector that will meet your expectations</p>	<p>VIVIBRIGHT GP90 HD Theater Projector: Portable, High-Definition Entertainment</p> <p>Discover the VIVIBRIGHT GP90 HD theater projector, offering a native 1280x800 resolution, 3200 lumens brightness, and a 30,000-hour LED lamp life. This compact and portable projector supports wireless projection via Android OS, Wi-Fi, and Bluetooth, making it ideal for home entertainment, gaming, and presentations. Explore its rich multimedia capabilities, energy efficiency, and durable design.</p>
 <p>VIVIBRIGHT VIVIBRIGHT'S GP90 HD theater Projector Fast, fun, portable and ultra-bright</p> <p>Compact video projector that will meet your expectations</p>	<p>VIVIBRIGHT GP90 HD Theater Projector: Portable, Wireless, and Brilliant Home Entertainment</p> <p>Discover the VIVIBRIGHT GP90 HD theater projector, offering a portable and brilliant home entertainment experience with its 1280x800 native resolution, 3200 lumens, LED technology, and wireless connectivity.</p>
 <p>Agilent 4200/4150 TapeStation System Site Preparation Checklist</p> <p>Introduction</p> <p>Customer Responsibilities</p> <p>Agilent</p>	<p>Agilent 4200/4150 TapeStation System Site Preparation Checklist</p> <p>A guide and checklist outlining the supplies, consumables, space, and utility requirements for the successful installation and operation of the Agilent 4200/4150 TapeStation System.</p>