

VENZ R4114-V2

VENZ Indoor Security Camera R4114-V2 User Manual

Model: R4114-V2

1. INTRODUCTION

This manual provides essential instructions for setting up, operating, and maintaining your VENZ Indoor Security Camera R4114-V2. This 1080P HD plug-in WiFi camera is designed for indoor use, offering features such as motion detection, two-way audio, night vision, and flexible storage options. It is compatible with Alexa and Google Home for enhanced smart home integration.



Image: VENZ Indoor Security Camera R4114-V2 with a baby, highlighting smart alerts for home safety.

2. WHAT'S IN THE BOX

Verify that all components are present in the package:

- 1 x Indoor Security Camera
- 1 x USB Cable
- 1 x Power Adapter
- 2 x Screws
- 1 x Wall Anchors
- 1 x User Manual (this document)

3. SETUP

3.1 Initial Power-On and App Installation

1. Plug the camera into a power outlet using the provided USB cable and power adapter.
2. Download the **Woox Security** app from the Google Play Store or Apple App Store on your smartphone.
3. Register for an account or log in if you already have one.

3.2 Connecting to Wi-Fi

The camera requires a 2.4GHz Wi-Fi network for connection. Follow these steps to connect your camera:

1. Open the Woox Security app and tap the "+" icon to add a new device.
2. Select your camera model from the list of devices.
3. Follow the on-screen instructions in the app to put the camera into pairing mode. This usually involves pressing a reset button until an indicator light flashes.
4. Enter your 2.4GHz Wi-Fi network name and password when prompted by the app.
5. The app will generate a QR code. Hold your phone's screen with the QR code in front of the camera lens at a distance of 15-20 cm (6-8 inches) until you hear a confirmation sound from the camera.
6. Once connected, the camera's indicator light will turn solid, and the app will confirm successful pairing.

Flexible DIY Installation

Can be mounted on the table or wall
and talk via camera anytime

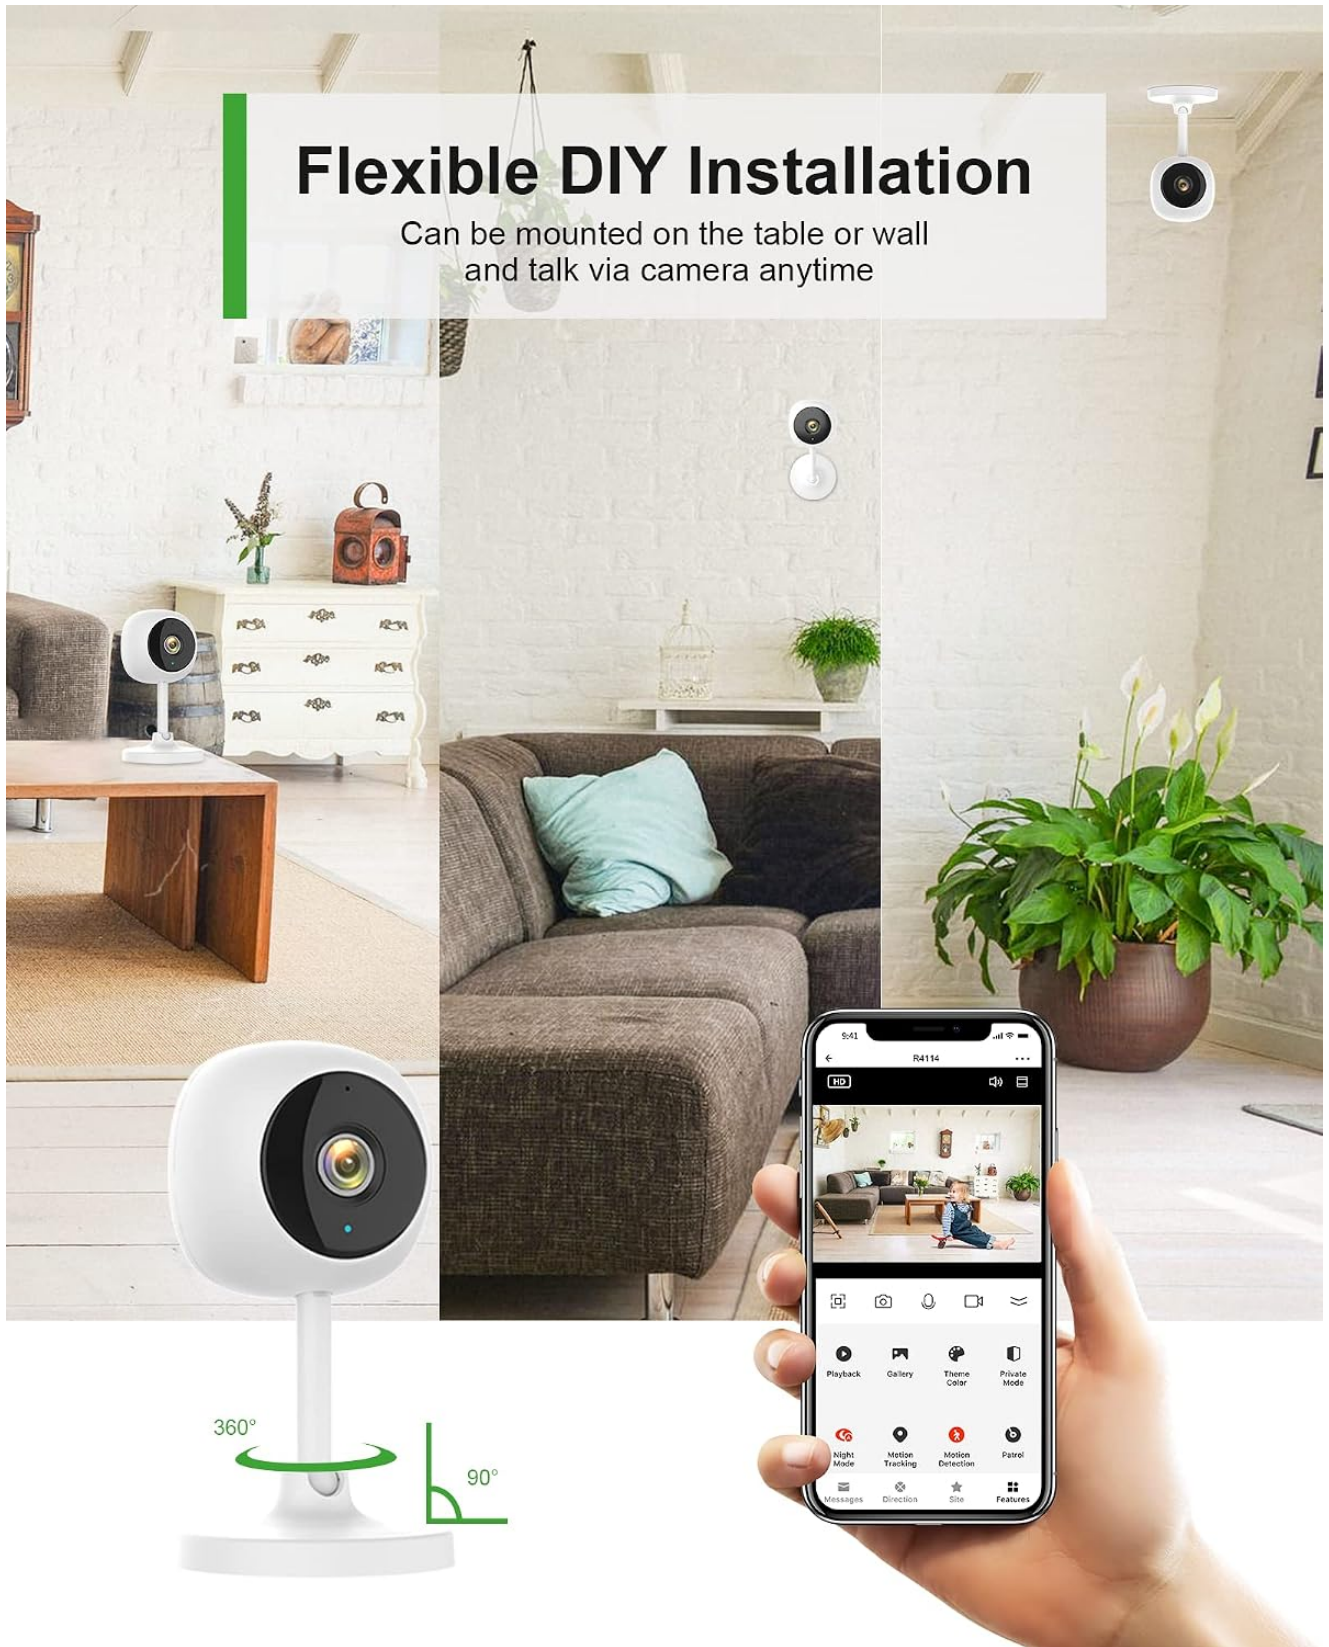


Image: Flexible installation options for the VENZ Indoor Security Camera, demonstrating placement on a table or wall, and a smartphone displaying the live camera feed.

Your browser does not support the video tag.

Video: This video demonstrates the process of connecting the VENZ indoor security camera to your home Wi-Fi network using the Woon Security app.

4. OPERATING THE CAMERA

4.1 Live View and Two-Way Audio

Access the live feed of your camera anytime, anywhere through the Woon Security app. The camera supports two-way audio, allowing you to listen in and speak through the camera's built-in speaker and microphone.

- To view the live feed, open the Woon Security app and select your camera.
- To use two-way audio, tap the microphone icon in the live view interface and speak into your phone.

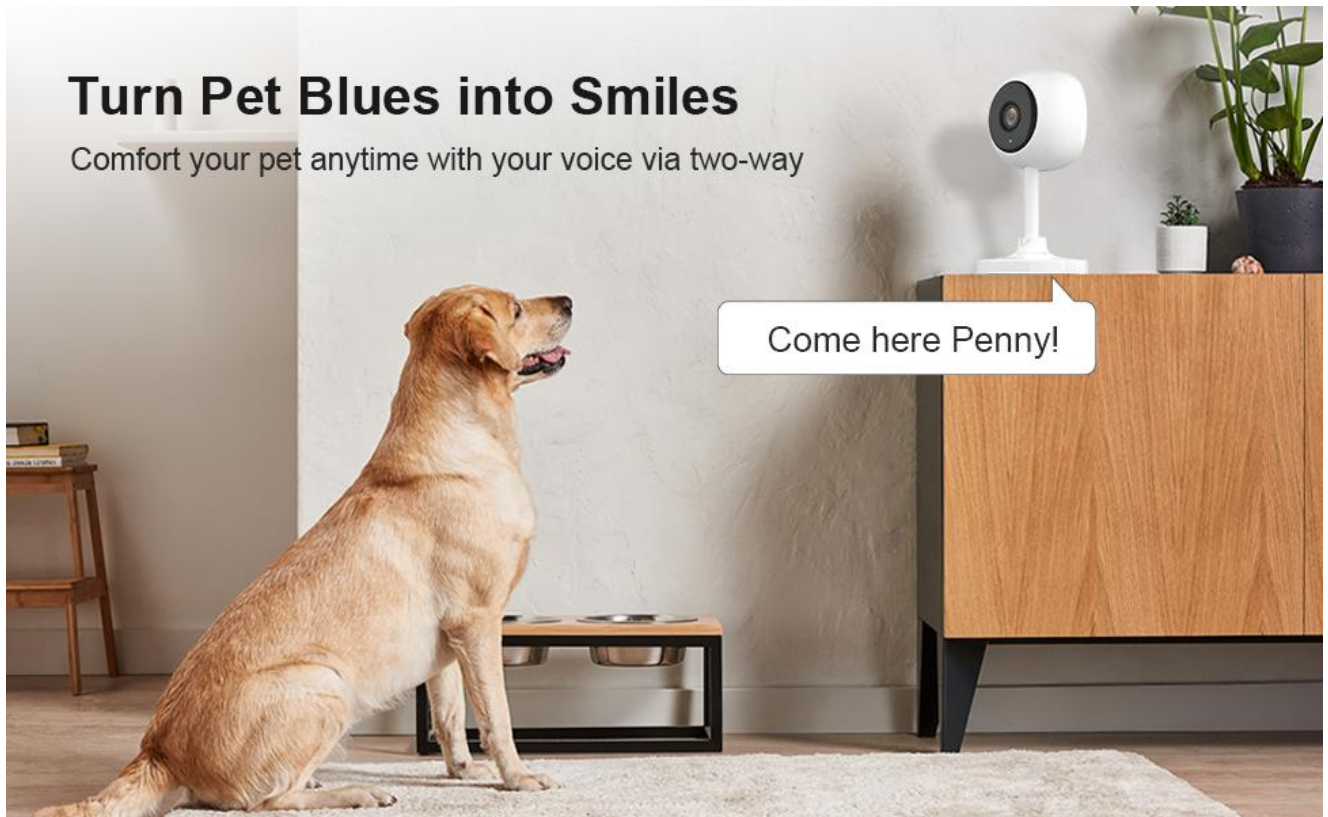


Image: The VENZ Indoor Security Camera facilitating two-way communication, showing a dog responding to a voice command.

4.2 Motion Detection Alerts

The camera features AI-powered motion detection. You can customize activity zones to receive notifications only for relevant events.

- In the app settings, navigate to "Motion Detection" to enable or disable this feature.
- Define specific activity zones to reduce false alerts.
- Adjust sensitivity levels as needed.

Intelligently Motion Detection

Notifications will be sent right to your phone

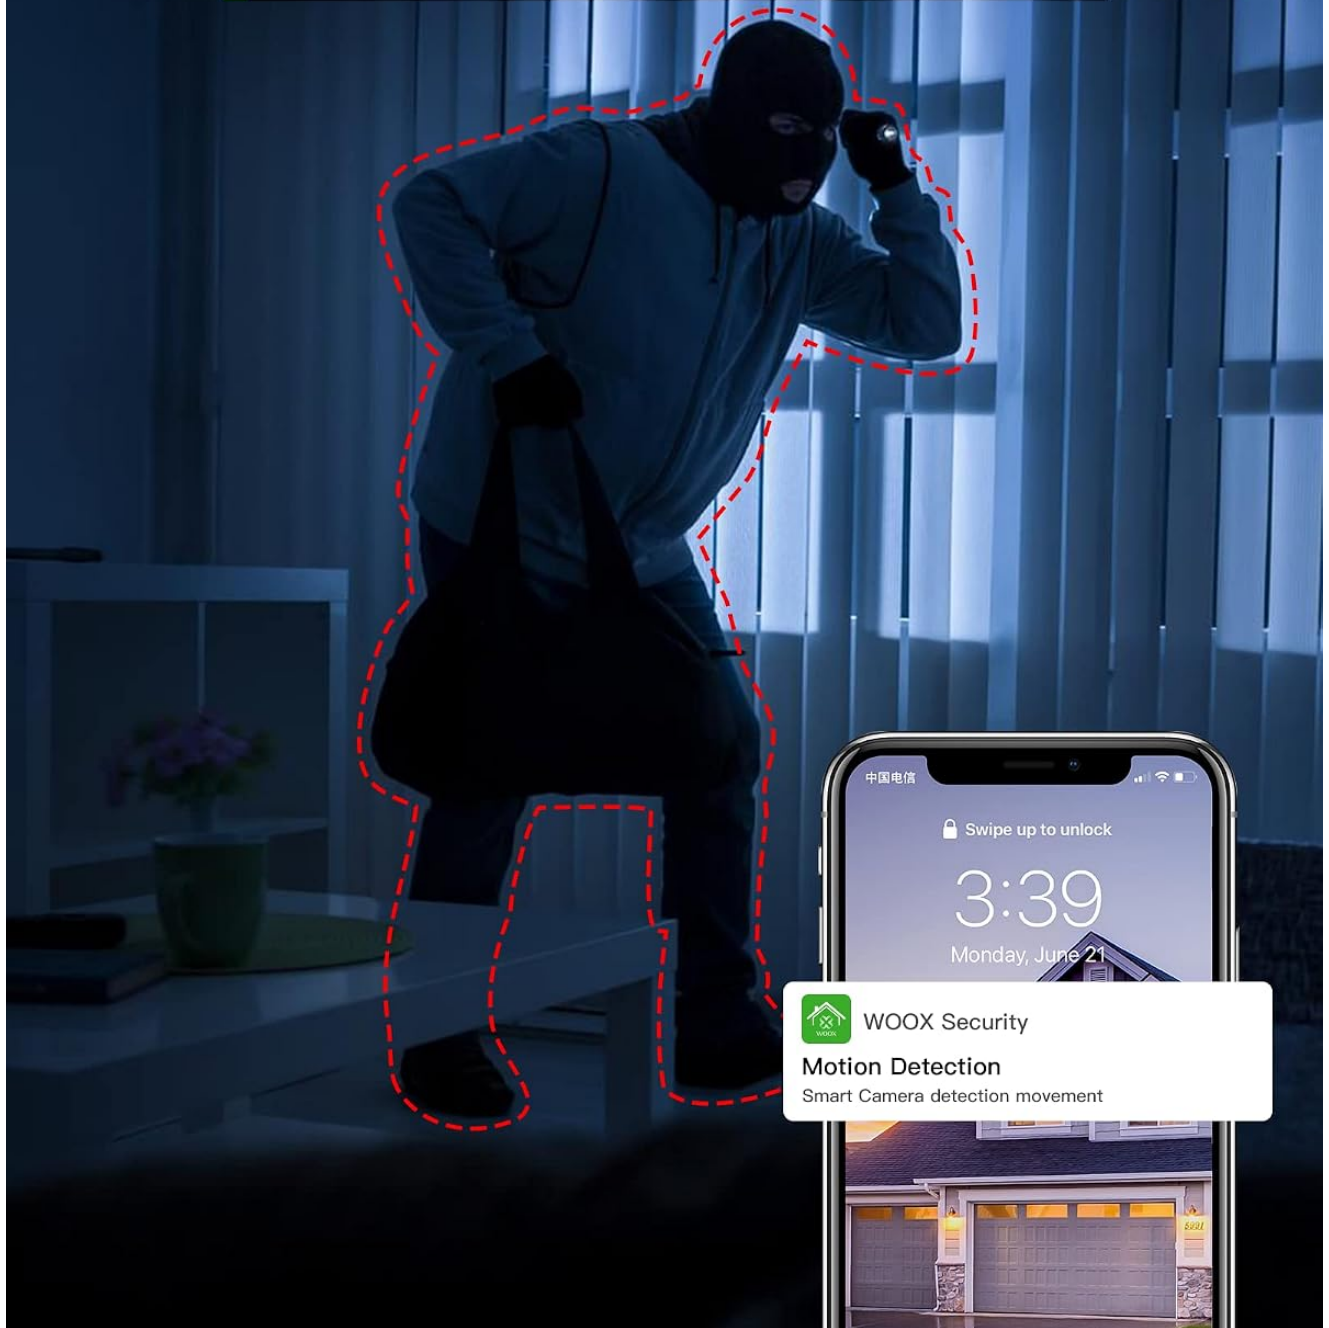


Image: The camera's intelligent motion detection feature, illustrating an intruder being detected and a corresponding notification appearing on a smartphone.

4.3 Night Vision

The camera is equipped with non-invasive night vision, allowing clear monitoring in low-light conditions without disturbing the environment.

- Night vision activates automatically in dim lighting.
- Monitor your baby or pets without visible red lights.

Non-invasive Night Vision

See every move of your baby or Pet

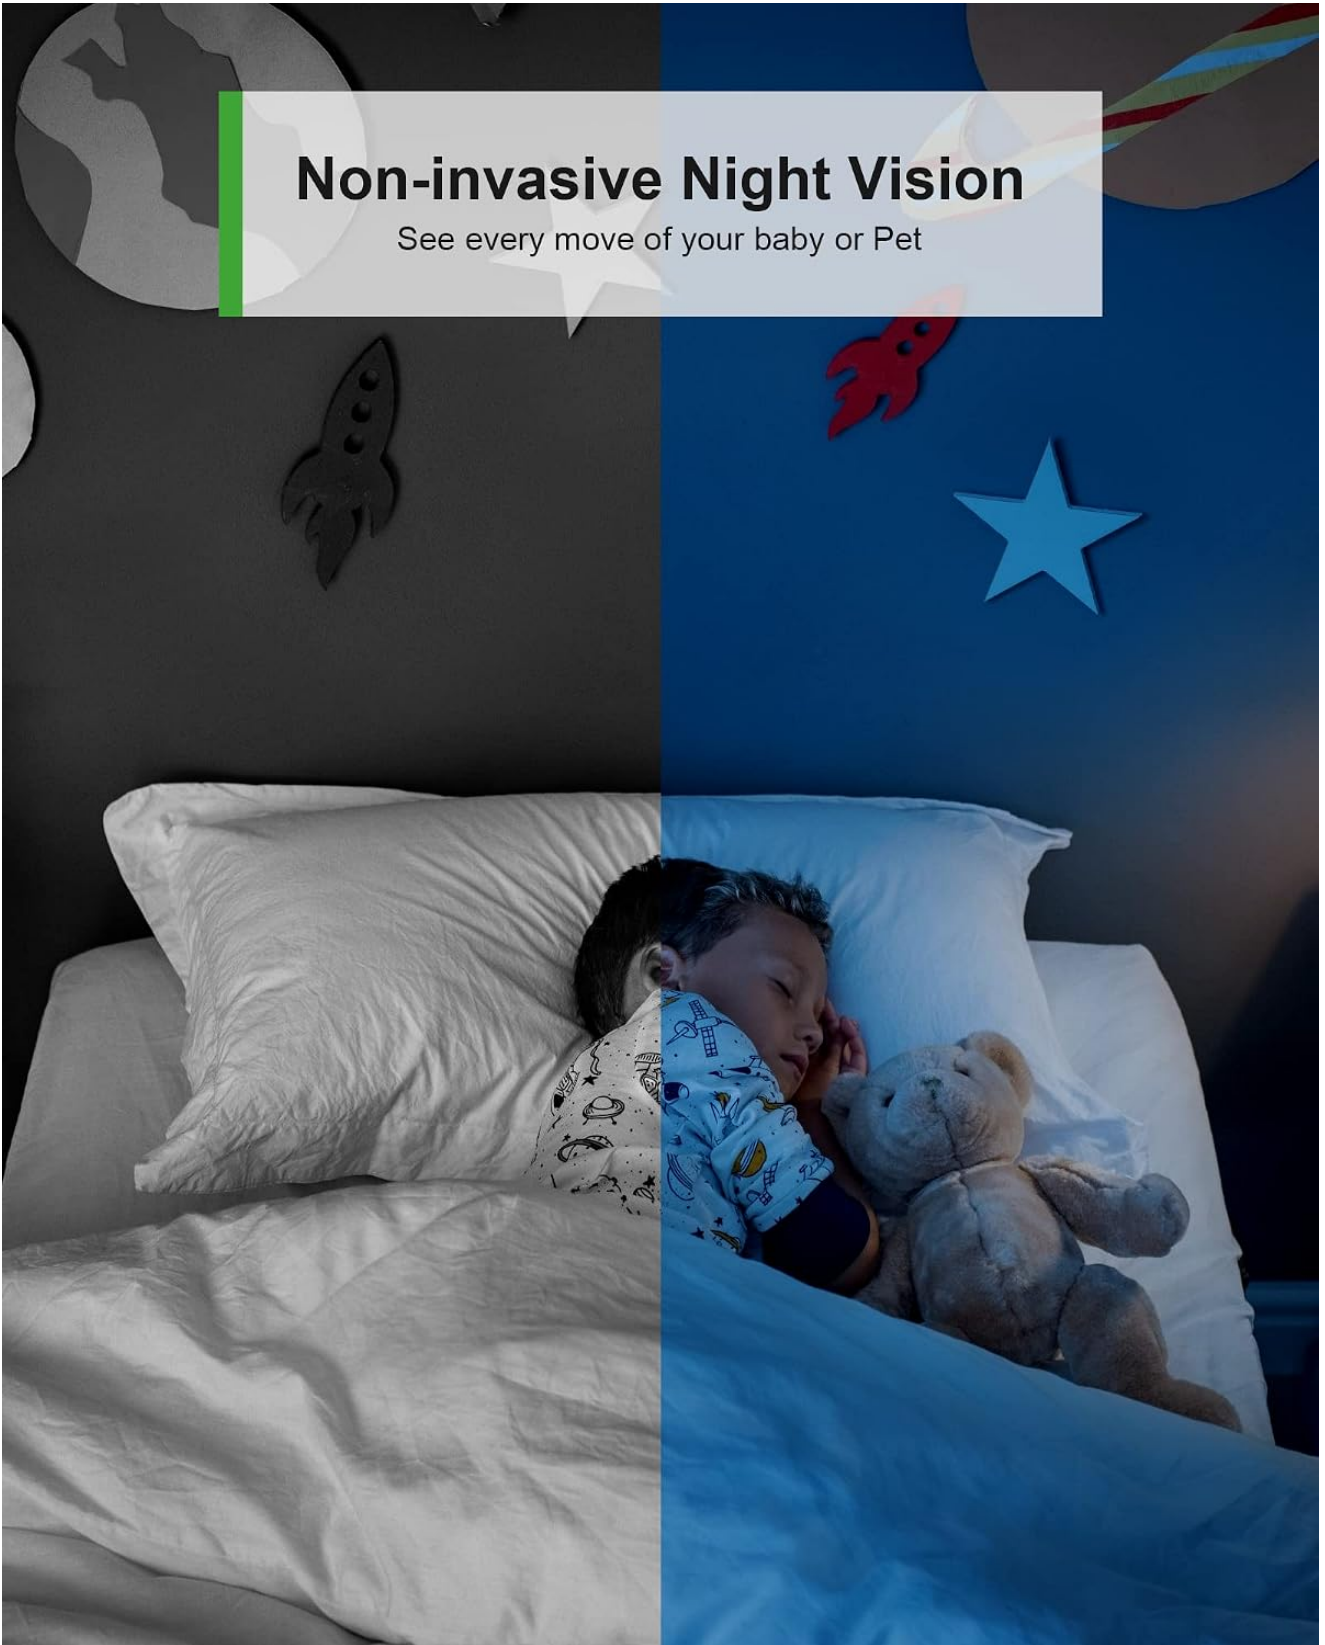


Image: Demonstration of the camera's non-invasive night vision, showing a clear view of a sleeping child in a dark room.

4.4 Storage Options (Cloud & SD Card)

Your VENZ camera supports both optional cloud storage and local storage via an SD card (up to 128GB, not included).

- **Cloud Storage:** Subscribe to the optional cloud service for secure, remote storage of your video clips. This prevents data loss from physical damage or theft of the camera.
- **SD Card Storage:** Insert a microSD card (Class 10 or higher recommended) into the designated slot on the

camera for local recording. The camera will automatically overwrite older footage when the card is full.

SD Card & Cloud Storage

support up to 128GB micro SD cards



Image: The VENZ Indoor Security Camera highlighting its support for both SD card and cloud storage options.

4.5 Smart Home Integration (Alexa & Google Home)

The camera is compatible with Amazon Alexa and Google Home, allowing for voice control and integration into your smart home ecosystem.

- Enable the Woon Security skill/action in your Alexa or Google Home app.
- Link your Woon Security account.

- Use voice commands like "Alexa, show me the baby room" to view the camera feed on compatible smart displays.

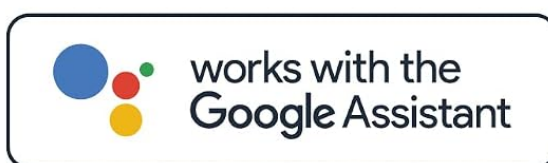
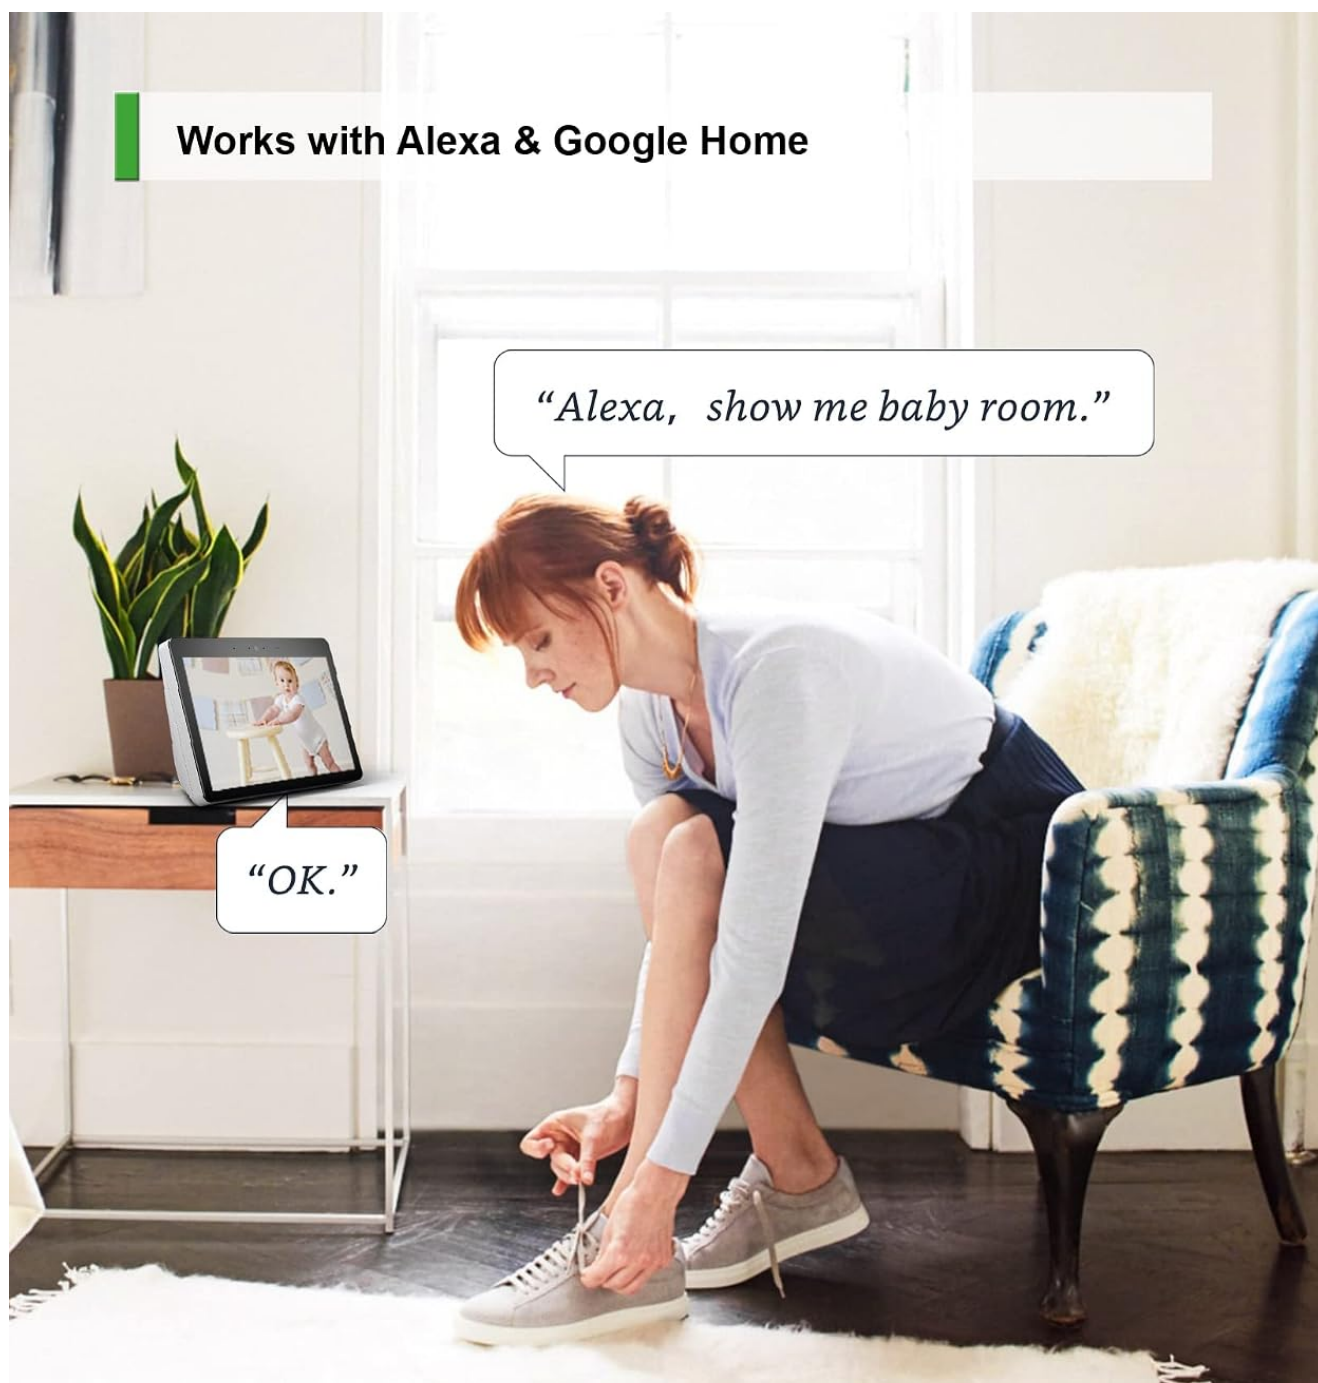


Image: A user interacting with an Echo Show to view the camera feed, demonstrating compatibility with Alexa and Google Home.

4.6 Noonlight Emergency Dispatch

The camera integrates with Noonlight's certified emergency dispatch services, providing an option to quickly involve police, fire, or EMS agencies.

- Activate Noonlight services through the Woon Security app (subscription may be required).
- In an emergency, use the app to dispatch services directly without needing to dial 911.

Smart Security System

Woox will take care of your family with
Noonlight Security



Image: Visual representation of the camera's integration with Noonlight for smart security and emergency response.

Your browser does not support the video tag.

Video: An overview of the VENZ Smart Indoor Security Camera R4114, showcasing its various features and benefits.

5. MAINTENANCE

Regular maintenance ensures optimal performance and longevity of your camera.

- **Cleaning:** Gently wipe the camera lens and body with a soft, dry cloth. Avoid using harsh chemicals or abrasive materials.
- **Firmware Updates:** Periodically check the Woon Security app for available firmware updates. Keeping your camera's firmware up-to-date ensures access to the latest features and security enhancements.
- **Placement:** Ensure the camera is placed in a stable location, away from direct sunlight, heat sources, and moisture.

6. TROUBLESHOOTING

If you encounter issues with your VENZ Indoor Security Camera, refer to the following common solutions:

Problem	Solution
Camera fails to connect to Wi-Fi.	• Ensure your Wi-Fi network is 2.4GHz. The camera does not support 5GHz networks. • Verify the Wi-Fi password is correct. • Move the camera closer to your Wi-Fi router. • Reset the camera by pressing the reset button (refer to app instructions for location) and try the setup process again.
No live feed or offline status.	• Check if the camera is powered on and the power adapter is securely connected. • Verify your home Wi-Fi network is active and has internet access. • Restart the camera by unplugging and re-plugging it.
Motion detection alerts are not received.	• Ensure motion detection is enabled in the Woon Security app. • Check app notification settings on your smartphone to ensure notifications are allowed for the Woon Security app. • Adjust motion detection sensitivity and activity zones in the app.
Two-way audio not working.	• Ensure your phone's microphone is enabled for the Woon Security app. • Check the volume settings on both your phone and within the app's live view.
SD card recording issues.	• Ensure the SD card is inserted correctly. • Format the SD card through the camera settings in the Woon Security app. • Use a Class 10 or higher microSD card.

7. SPECIFICATIONS

Feature	Detail
---------	--------

Feature	Detail
Model Name	R4114-V2
Video Capture Resolution	1080p
Effective Still Resolution	2 MP
Connectivity Technology	Wireless (Wi-Fi 2.4GHz)
Special Features	Motion Sensor, Night Vision, Two-Way Audio
Indoor/Outdoor Usage	Indoor
Compatible Devices	Laptop, Smartphone, Tablet (Alexa, Google Home)
Power Source	Corded Electric (5 Volts DC)
Storage	Cloud Storage, SD Card (up to 128GB)
Viewing Angle	107 Degrees
Night Vision Range	22.96 Feet
Item Dimensions	4.57 x 2.48 x 2.48 inches
Waterproof Rating	IP20
Manufacturer	VENZ
UPC	761312096043

8. WARRANTY

The VENZ Indoor Security Camera R4114-V2 comes with a **2-year manufacturer warranty**. Please retain your proof of purchase for warranty claims. For detailed terms and conditions, refer to the warranty information provided with your product or contact VENZ customer support.

9. SUPPORT

For further assistance, technical support, or inquiries, please utilize the following resources:

- **Woox Security App:** The app often includes an FAQ section, troubleshooting guides, and direct support contact options.
- **Manufacturer Website:** Visit the official VENZ website for product information, updated manuals, and support contact details.
- **Email Support:** Refer to your product packaging or the VENZ website for customer service email addresses.

VENZ Smart Home Security System

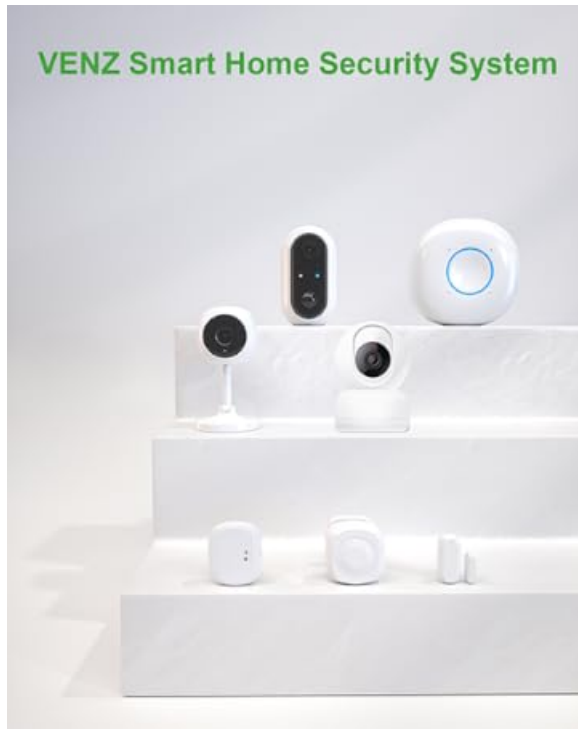


Image: VENZ Smart Security System branding with app download options, indicating support resources.