

SHUNZAO S9

SHUNZAO S9 Cordless Vacuum Cleaner Instruction Manual

Model: S9

General Information	Safety Instructions	Package Contents	Product Overview	
Setup & Assembly	Operating Instructions	Maintenance Warranty & Support	Troubleshooting	Specifications

1. GENERAL INFORMATION

This manual provides essential instructions for the safe and efficient use of your SHUNZAO S9 Cordless Vacuum Cleaner. Please read it thoroughly before first use and retain it for future reference.

2. IMPORTANT SAFETY INSTRUCTIONS

When using an electrical appliance, basic precautions should always be followed, including the following:

- Read all instructions before using the appliance.
- Do not use outdoors or on wet surfaces.
- Do not allow to be used as a toy. Close attention is necessary when used by or near children.
- Use only as described in this manual. Use only manufacturer's recommended attachments.
- Do not use with damaged cord or plug. If appliance is not working as it should, has been dropped, damaged, left outdoors, or dropped into water, return it to a service center.
- Do not pull or carry by cord, use cord as a handle, close a door on cord, or pull cord around sharp edges or corners. Do not run appliance over cord. Keep cord away from heated surfaces.

- Do not unplug by pulling on cord. To unplug, grasp the plug, not the cord.
- Do not handle plug or appliance with wet hands.
- Do not put any object into openings. Do not use with any opening blocked; keep free of dust, lint, hair, and anything that may reduce air flow.
- Keep hair, loose clothing, fingers, and all parts of body away from openings and moving parts.
- Do not pick up anything that is burning or smoking, such as cigarettes, matches, or hot ashes.
- Do not use to pick up flammable or combustible liquids, such as gasoline, or use in areas where they may be present.
- Do not pick up toxic material (e.g., chlorine bleach, ammonia, drain cleaner).
- Do not use in an enclosed space where vapors are present from oil base paint, paint thinner, some mothproofing substances, flammable dust, or other explosive or toxic vapors.
- Do not use to pick up hard or sharp objects such as glass, nails, screws, coins, etc.
- Do not use without dust cup and/or filters in place.
- Turn off all controls before unplugging.
- Use extra care when cleaning on stairs.
- Store the appliance indoors. Put away after use to prevent accidents.
- Use only the charger specified by the manufacturer.
- Do not incinerate the appliance even if it is severely damaged. The batteries can explode in a fire.

3. PACKAGE CONTENTS

Please check the contents of your package to ensure all items are present and undamaged:

- SHUNZAO S9 Cordless Vacuum Cleaner (Main Unit)
- Extension Wand
- Electric Floor Brush with LED Headlights
- Detachable Battery (Lithium-Ion)
- Crevice Nozzle
- 2-in-1 Brush
- Wall Mount Bracket
- Charging Adapter
- HEPA Filter (pre-installed)
- User Manual

4. PRODUCT OVERVIEW

The SHUNZAO S9 Cordless Vacuum Cleaner is designed for powerful and versatile cleaning across various surfaces. Key features include:

- **25KPa Powerful Suction:** Equipped with a 320W dual digital brushless motor for strong suction on hard floors and short-pile rugs.
- **60 Minutes Long Runtime:** Detachable 2500mAH battery provides extended cleaning time.
- **3 Adjustable Modes:** ECO (60 mins), Standard (25 mins), and Turbo (10 mins) for different cleaning needs.
- **Flexible Brushhead & Front LED Lights:** Rotatable brush head with LED lights to illuminate dark areas and easily maneuver under furniture.

- **Excellent 5-Layer Filter System:** Captures 99.9% of fine dust, with a washable and recyclable HEPA filter.
- **Lightweight & Compact Storage:** Cordless design with wall-mount for convenient storage.



Image: The vacuum cleaner's powerful suction head shown cleaning various floor types including cement, short-haired carpet, marble, and wooden floor, highlighting its 25000PA suction capability.



Image: An illustration of the anti-winding design within the brush head, preventing hair tangles.



Image: A detailed view of the 300W brushless motor, emphasizing its powerful and efficient operation.

5. SETUP & ASSEMBLY

Follow these steps to assemble your SHUNZAO S9 Cordless Vacuum Cleaner:

1. **Attach the Extension Wand:** Insert the extension wand into the main unit until it clicks securely into place.
2. **Attach the Electric Floor Brush:** Connect the electric floor brush to the other end of the extension wand, ensuring it clicks firmly.
3. **Install the Battery:** Slide the detachable battery into the main unit until it locks. Ensure it is fully charged before first use.
4. **Charging:** Connect the charging adapter to the battery port on the main unit or directly to the detachable battery. Plug the adapter into a power outlet. The LED display will indicate charging status.
5. **Wall Mount Installation (Optional):** Use the provided wall mount bracket and screws to install the vacuum on a wall for convenient storage and charging.



Image: A user demonstrating the easy removal and attachment of the detachable battery from the main vacuum unit.



Image: The wall mount bracket for convenient storage of the vacuum cleaner.



Image: The charging adapter used to recharge the vacuum's battery.

6. OPERATING INSTRUCTIONS

Your SHUNZAO S9 offers versatile cleaning options:

6.1 Power On/Off and Mode Selection

- **Power On:** Press the power button on the main unit. The LED display will light up.
- **Mode Selection:** Press the mode switch button on the LED display to cycle through the three suction modes:
 - **ECO Mode:** Up to 60 minutes runtime for light cleaning.
 - **Standard Mode:** Up to 25 minutes runtime for daily cleaning.
 - **Turbo Mode:** Up to 10 minutes runtime for deep cleaning and stubborn messes.
- **Power Off:** Press the power button again to turn off the vacuum.

6.2 Using Different Attachments

The SHUNZAO S9 comes with various attachments for different cleaning tasks:

- **Electric Floor Brush:** Ideal for hard floors, tiles, and short-pile carpets. The LED headlights illuminate dust in dark areas.
- **Crevice Nozzle:** Perfect for narrow gaps, corners, and edges.
- **2-in-1 Brush:** Suitable for upholstery, curtains, and delicate surfaces.

ROTATABLE BRUSH HEAD & LED FRONT LIGHTING

Flexible, mutle-angle for hidden dust under the furniture like couches or beds


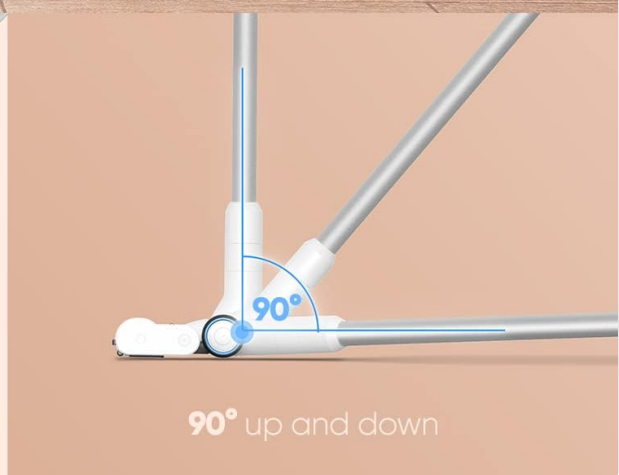


Image: The rotatable brush head with LED front lighting, demonstrating its flexibility for cleaning under furniture and in dark spaces.

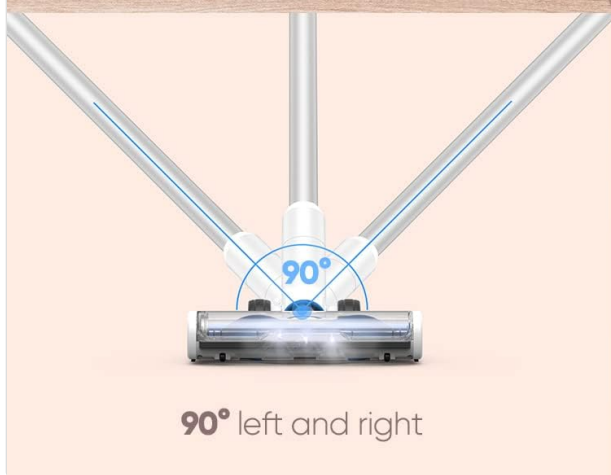

CLEAN EVERYWHERE WITH 3 MODES



Image: Various cleaning scenarios showing the vacuum in stick mode for floors, handheld mode with crevice tool for tight spots, and handheld with brush for upholstery, illustrating its 3 modes of operation.

EASY TO USE & LED DISPLAY



Image: A close-up of the vacuum's handle and LED display, showing indicators for Eco, Standard, Turbo modes, fault notification, and battery capacity.



Image: A close-up of the 2-in-1 brush attachment, suitable for various surfaces.



Image: A close-up of the crevice nozzle attachment, designed for reaching tight spaces.

Your browser does not support the video tag.

Video: This video demonstrates the powerful suction, lightweight design, and versatile attachments of the SHUNZAO S9 Cordless Vacuum Cleaner, showing its effectiveness on various surfaces and in different cleaning scenarios.

Your browser does not support the video tag.

Video: This video showcases the QikCln 450W 45Kpa Cordless Vacuum Cleaner, highlighting its strong suction, ease of use, and ability to clean various types of debris from different surfaces.

7. MAINTENANCE

Regular maintenance ensures optimal performance and extends the lifespan of your vacuum cleaner.

7.1 Emptying the Dustbin

- When the dustbin is full, press the release button to detach it from the main unit.
- Hold the dustbin over a trash can and press the bottom release button to open the flap and empty the contents.
- Close the flap securely and reattach the dustbin to the main unit.



Image: A close-up of the dustbin, illustrating its easy-to-clean design and transparent material for monitoring dust levels.

7.2 Cleaning the Filters

The SHUNZAO S9 features a 5-layer filtration system, including a washable HEPA filter:

- Remove the dustbin.

- Twist and pull out the filter assembly.
- Separate the HEPA filter and other filter components.
- Rinse the HEPA filter and other washable parts under running water until clean.
- Allow all filter components to air dry completely for at least 24 hours before reassembling and placing them back into the vacuum. Do not use the vacuum with wet filters.

5-STAGE HEPA FILTRATION SYSTEM

Captures 99% of fine dust and particles as small as 0.3 microns

① Sponge Filter ●

② Hepa Filter ●

③ Cyclone cone top ●

④ Stainless Steel Mesh ●

⑤ Cyclone cone bottom ●

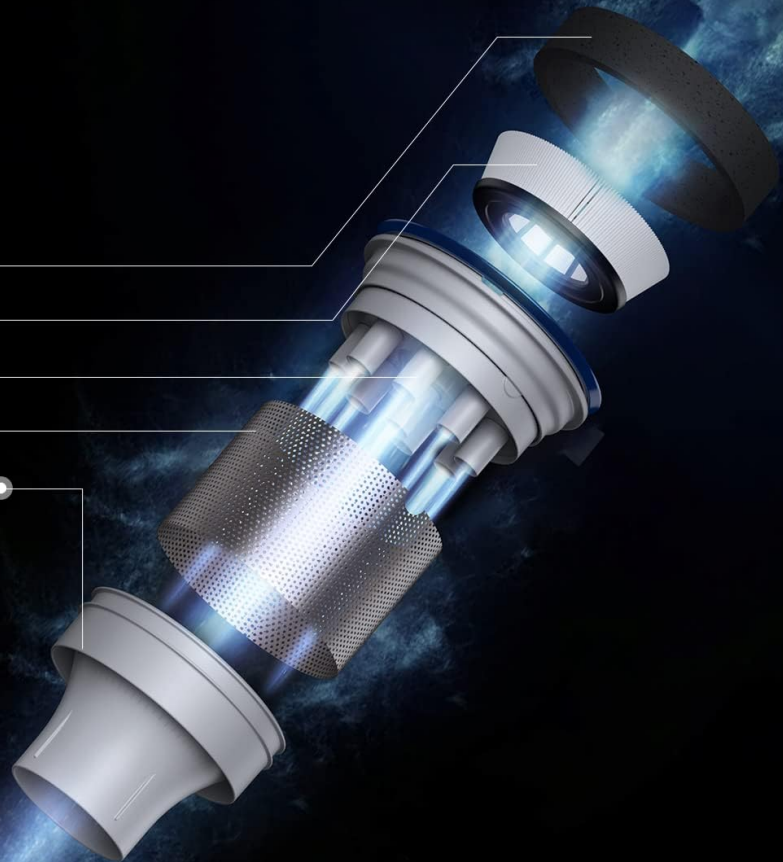


Image: An exploded view diagram illustrating the 5-stage HEPA filtration system, including sponge filter, HEPA filter, cyclone cone top, stainless steel mesh, and cyclone cone bottom.



Image: A close-up of the HEPA filter, highlighting its design for capturing fine dust and particles.

7.3 Cleaning the Brush Head

- Regularly check the electric floor brush for tangled hair or debris.
- To remove the brush roll, follow the instructions in the manual (usually involves unlocking a latch or twisting a knob).
- Use scissors or a brush to remove any tangled hair or fibers.
- Reinsert the brush roll and secure it.

8. TROUBLESHOOTING

If you encounter issues with your SHUNZAO S9, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Vacuum does not turn on	Battery is not charged or not properly installed.	Charge the battery fully. Ensure the battery is securely clicked into place.
Low suction power	Dustbin is full, filters are clogged, or brush head is blocked.	Empty the dustbin. Clean or replace filters. Remove any blockages from the brush head or suction path.
Brush head stops rotating	Hair or debris tangled in the brush roll.	Turn off the vacuum and remove any tangled hair or debris from the brush roll.
Short runtime	Battery not fully charged or operating in Turbo mode constantly.	Ensure battery is fully charged (approx. 4-5 hours). Use lower suction modes for longer runtime.

9. SPECIFICATIONS

Feature	Detail
Brand	SHUNZAO
Model Name	S9
Special Feature	HEPA, Lightweight
Filter Type	Disk (5-layer system with washable HEPA)
Included Components	Battery, Wall Mount, Crevice Nozzle, 2-in-1 Brush, Electric Floor Brush, Extension Wand, Charging Adapter
Is Cordless?	Yes
Capacity	0.75 Liters
Wattage	320.00 W

Feature	Detail
Charging Time	Approximately 4-5 hours
Recommended Uses	Carpet, Hard Floor, Rug, Bare Floor, Stair, Table, Under or behind of the couch and bed
Form Factor	Stick
Color	Blue+white
Product Dimensions	9"L x 4"W x 15"H
Battery Description	Lithium-Ion (2500mAH)
Noise Level	70 Decibels
Battery Life	Up to 60 minutes (Eco mode)
Item Weight	6 pounds
Number of Speeds	3

10. WARRANTY & SUPPORT

SHUNZAO provides a **12-month warranty** for your product. For any questions, troubleshooting assistance, or warranty claims, please contact the friendly support team for quick solutions. You can typically find contact information on the product packaging or the official SHUNZAO website.