

BUFFBEE Alarm Clock with Wireless Charging Station

BUFFBEE Alarm Clock with Wireless Charging Station User Manual

Model: Alarm Clock with Wireless Charging Station

INTRODUCTION

Thank you for choosing the BUFFBEE Alarm Clock with Wireless Charging Station. This device combines a digital alarm clock with a versatile wireless charging stand, designed to charge your iPhone, Apple Watch, and AirPods simultaneously. It features a dimmable LED display, adjustable volume, and multiple safety protections to ensure efficient and secure charging. Please read this manual carefully before use to ensure proper operation and to maximize the lifespan of your product.

WHAT'S IN THE BOX

Upon opening your package, please verify that all the following items are included:

- BUFFBEE Alarm Clock with Wireless Charging Station
- USB-C Charging Cable
- Power Adapter
- User Manual (this document)



Image: All components included in the product packaging.

PRODUCT OVERVIEW

The BUFFBEE Alarm Clock with Wireless Charging Station is designed for convenience and efficiency. It features dedicated charging areas for your smartphone, Apple Watch, and AirPods, alongside a clear digital clock display.

Key Features:

- **Digital Alarm Clock:** Features adjustable brightness and volume, with 12/24 hour format options.
- **Wireless Phone Charging:** Supports 15W, 10W, 7.5W, and 5W output for various wireless charging enabled smartphones.
- **Apple Watch Charging:** Dedicated magnetic charging spot for Apple Watch Series 2-7, SE.
- **AirPods Charging:** Wireless charging pad for AirPods 2 (with wireless charging case), AirPods 3, and AirPods Pro.
- **Safety Protections:** Built-in overcharge, overvoltage, overheat, and overcurrent protection.

Universal Compatibility



Phone

10W

Samsung Galaxy S10, 10 Plus, S10E, S9, S9 Plus, Note 9, Note 8, S8, S8 Plus, S7 S7 Edge

7.5W

iPhone 13, 13 mini, 13 pro, 13 pro max, 12, 12 mini, 12 pro, 12 pro mx, 11, 11 pro, 11pro max, XR, XS, X, 8, 8 Plus, SE 2020

**5W
15W**

All Other Wireless Charging Enabled Phones



Watch

Apple Watch Series 2-7, SE and more



AirPods

AirPods 2 (with the Wireless Charging Case), AirPods 3, AirPods Pro and more



Image: The charging station with devices in place, highlighting its multi-device capability.

Universal Compatibility



10W Samsung Galaxy S10 Series, S9 Series, Note 9, Note 8, S8 Series, S7 Series

7.5W iPhone 13 Series, 12 Series 11 Series X Series 8 Series, SE 2020

5W All Other Wireless Charging Enabled Phones

15W



Apple Watch Series 2-7, SE and more



AirPods 2 (with the Wireless Charging Case), AirPods 3, AirPods Pro and more



Image: Diagram illustrating the internal safety features and charging coils.

SETUP

Follow these steps to set up your BUFFBEE Alarm Clock with Wireless Charging Station:

1. **Connect Power:** Insert the USB-C end of the charging cable into the port on the back of the charging station. Plug the other end of the cable into the provided power adapter, then plug the adapter into a wall outlet. The digital display will light up, indicating power is connected.
2. **Place Devices:**
 - **Smartphone:** Place your wireless charging enabled smartphone vertically or horizontally on the main charging stand. Ensure it is centered for optimal charging.
 - **Apple Watch:** Place your Apple Watch on the magnetic charging disc at the top of the stand.
 - **AirPods:** Place your AirPods (with wireless charging case) on the flat charging pad at the base of the unit.
3. **Verify Charging:** A blue indicator light will briefly illuminate when a device is correctly placed and charging. Your device's screen will also show a charging icon.

Your browser does not support the video tag.

Video: Official product video demonstrating the setup and charging capabilities of the BUFFBEE Alarm Clock with Wireless Charging Station for iPhone, Apple Watch, and AirPods.

Alarm Clock with Wireless Charging



Alarm
Clock



Wireless
Charger



Safe
Charging



Vertically or
Horizontally



Case
Friendly



Adjustable
Dimmer



Image: Universal compatibility chart for different devices and charging wattages.

OPERATING INSTRUCTIONS

Setting the Time

1. Press and hold the **Time Set** button (usually marked with a clock icon) for 3 seconds. The hour digits will begin to flash.
2. Use the **+** and **-** buttons to adjust the hour.
3. Press the **Time Set** button again to switch to minute adjustment. The minute digits will flash.
4. Use the **+** and **-** buttons to adjust the minutes.
5. Press the **Time Set** button one more time to confirm and exit time setting mode.
6. To switch between 12-hour and 24-hour format, briefly press the **Time Set** button when not in setting mode.

Setting the Alarm

1. Press and hold the **Alarm Set** button (usually marked with an alarm clock icon) for 3 seconds. The alarm hour digits will flash.
2. Use the **+** and **-** buttons to adjust the alarm hour.
3. Press the **Alarm Set** button again to switch to alarm minute adjustment. The alarm minute digits will flash.
4. Use the **+** and **-** buttons to adjust the alarm minutes.
5. Press the **Alarm Set** button one more time to confirm and exit alarm setting mode.
6. To activate or deactivate the alarm, briefly press the **Alarm Set** button. An alarm icon will appear/disappear on the display.
7. When the alarm sounds, press any button to activate the snooze function (typically 9 minutes). To turn off the alarm completely, press and hold the **Alarm Set** button.

Excellent Alarm Clock



Alarm



Snooze



Adjustable
Brightness



12/24 Hour
Format



Adjustable
Volume



Image: Overview of the digital alarm clock features.

Adjusting Display Brightness

The LED display has multiple brightness levels to suit your preference, especially for nighttime use.

1. Press the **Brightness** button (usually marked with a sun icon) repeatedly to cycle through the available brightness levels (e.g., 100%, 40%, 3%, 1%, 0% off).
2. Select the desired brightness level. The '0% off' setting turns the display completely off for undisturbed sleep.

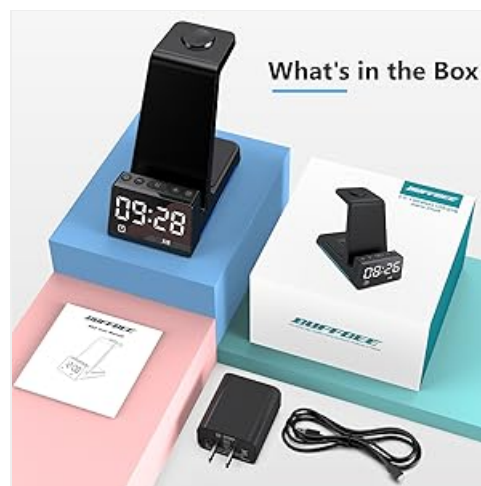


Image: Visual representation of the 5-level adjustable brightness settings.

Adjusting Alarm Volume

The alarm volume can be adjusted to your preferred level.

1. While the alarm is sounding, or during alarm setting mode, press the **Volume** button (usually marked with a speaker icon) to cycle through the available volume levels.
2. Select the desired volume.



Image: Illustration of the 3-level adjustable volume feature.

MAINTENANCE

To ensure the longevity and optimal performance of your charging station, follow these maintenance guidelines:

- **Cleaning:** Disconnect the power before cleaning. Use a soft, dry cloth to wipe the surface. Do not use abrasive cleaners, solvents, or chemical sprays.
- **Avoid Liquids:** Keep the device away from water and other liquids. Do not operate with wet hands.
- **Temperature:** Store and operate the device in a dry environment at room temperature. Avoid extreme heat or cold.
- **Handling:** Handle the device with care. Avoid dropping or subjecting it to strong impacts.
- **Power Supply:** Only use the provided power adapter and cable. Using unauthorized power sources may damage the device and void the warranty.

TROUBLESHOOTING

If you encounter any issues with your BUFFBEE Alarm Clock with Wireless Charging Station, please refer to the following troubleshooting guide:

Problem	Possible Cause	Solution
Device is not powering on.	Power cable not connected properly; Power adapter faulty; Wall outlet not working.	Ensure the USB-C cable is securely connected to both the station and the power adapter. Try a different wall outlet. Verify the power adapter is functioning.

Problem	Possible Cause	Solution
Smartphone/AirPods not charging wirelessly.	Device not placed correctly; Device not wireless charging compatible; Phone case too thick; Foreign objects on charging pad.	Reposition the device to ensure it is centered on the charging pad. Remove any thick phone cases or metallic objects. Confirm your device supports Qi wireless charging.
Apple Watch not charging.	Watch not placed correctly; Watch charger not making contact; Watch model not supported.	Ensure the Apple Watch is securely placed on the magnetic charging disc. Remove any watch cases that might obstruct contact. This charger supports Apple Watch Series 2-7, SE.
Charging is slow or intermittent.	Using a non-original power adapter/cable; Device overheating; Multiple devices charging simultaneously.	Use the provided power adapter and cable. Ensure the device is in a well-ventilated area. Charging multiple devices may slightly reduce individual charging speeds.
Alarm clock display is too bright/dim.	Brightness setting needs adjustment.	Press the Brightness button to cycle through the 5 brightness levels, including 'off'.
Alarm is not sounding or is too quiet/loud.	Alarm not set or deactivated; Volume level too low/high.	Verify the alarm is activated (alarm icon visible). Adjust the alarm volume using the Volume button.

SPECIFICATIONS

Feature	Detail
Product Dimensions	6.3 x 1.5 x 3.5 inches
Item Weight	15.8 ounces
Brand	BUFFBEE
Connector Type	Wireless
Compatible Devices	Cellular Phones, Apple Watch, AirPods (with wireless charging case)
Compatible Phone Models	Samsung Galaxy S10 series, iPhone 8 and newer, other Qi-enabled phones
Special Feature	Adjustable, Fast Charging, Wireless Charger, Wireless Charging
Input Voltage	9 Volts
Total USB Ports	1 (for power input)
Wattage	15 watts (max output)
Specification Met	Qi

Feature	Detail
Power Source	AC Adapter (Battery Powered refers to internal clock battery backup, not main power)

WARRANTY AND SUPPORT

Your BUFFBEE Alarm Clock with Wireless Charging Station comes with a standard manufacturer's warranty. For specific warranty details, including duration and coverage, please refer to the warranty card included in your product packaging or contact BUFFBEE customer support directly.

If you require technical assistance, have questions about product operation, or need to report a defect, please reach out to BUFFBEE customer service through the contact information provided on the product packaging or the official BUFFBEE website. Please have your product model and purchase date ready when contacting support.