

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

- > [arVin](#) /
- > [arVin Gamepad Wireless Game Controller Instruction Manual](#)

arVin Gamepad Wireless Controller

arVin Gamepad Wireless Game Controller Instruction Manual

Model: Gamepad Wireless Controller

INTRODUCTION

This manual provides detailed instructions for setting up, operating, and maintaining your arVin Gamepad Wireless Game Controller. Please read this manual carefully before use to ensure proper functionality and to maximize your gaming experience. Keep this manual for future reference.



Image: The arVin Gamepad Wireless Game Controller, a black controller with standard button layout.

PRODUCT OVERVIEW

The arVin Gamepad is a versatile wireless controller designed for multi-platform compatibility, offering an enhanced gaming experience across various devices. It features an ergonomic design, adjustable turbo function, macro programming, and a built-in cell phone holder.

Controller Layout

PRODUCT DETAILS

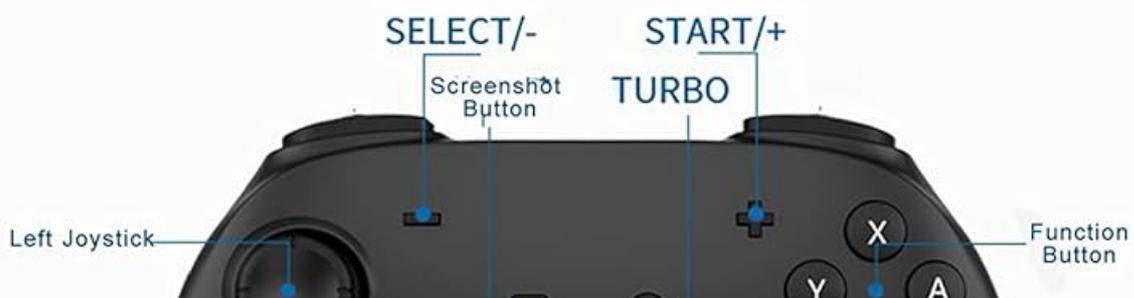




Image: Detailed diagram of the arVin Gamepad showing the front, back, and top views with labels for all buttons and ports, including Left Joystick, Right Joystick, Arrow Keys, HOME, SELECT/-, START/+, TURBO, Function Button, AGR, AGL, One Click Connection, Reset, USB Port, R1, R2, L1, L2.

- **Left Joystick:** For directional control.
- **Right Joystick:** For camera control or aiming.
- **Arrow Keys (D-Pad):** For precise directional input.
- **A/B/X/Y Buttons:** Action buttons.
- **HOME Button:** Returns to the system home screen or powers on/off.
- **SELECT/- Button:** Select or minus function.
- **START/+ Button:** Start or plus function.
- **TURBO Button:** Activates turbo function.
- **Function Button:** Additional programmable button.
- **AGR/AGL Buttons:** Back programmable keys for macro functions.
- **R1/R2/L1/L2 Triggers:** Shoulder and trigger buttons.
- **USB Port:** For charging and wired connection.

SETUP


Charging the Controller

Before first use, fully charge the controller. Connect the provided USB cable to the controller's USB port and to a power source (e.g., computer USB port, USB wall adapter). The charging indicator lights will show the charging status and turn off when fully charged.

- **Battery Capacity:** 550mAh
- **Charging Time:** Approximately 2-3 hours
- **Playing Time:** Approximately 18-20 hours on a full charge

Six Fingers Operation

Aiming, shooting, moving
and switching angles
at the same time



50° Big Angle
no dead zone



0.01
Linear variation



360° Area
Positioning



Image: Graphic illustrating the 550mAh battery, 2-3 hours charging time, and 18-20 hours playing time for the arVin Gamepad.

Pairing with Devices

The arVin Gamepad supports multiple platforms. Follow the specific pairing instructions for your device:

ADJUSTABLE TURBO FUNCTION

With 3-speed adjustable Turbo function (5/s, 12/s, 20/s) you can set A/B/X/Y/L1/R1/L2/R2 to Turbo function. Press and hold the Turbo button for 3s and then press the '-' to remove the Turbo function from all buttons.



Image: Diagram showing multi-platform compatibility for Nintendo Switch, iPhone, iPad, and Android phones, with pairing modes X+Home and Y+Home.

1. For iOS (iPhone, iPad) - iOS 13.0+ System:

Press and hold the **X button + HOME button** simultaneously until the indicator lights flash rapidly. On your iOS device, go to Bluetooth settings and select "arVin Gamepad" to pair. This mode is also used for some games like Call of Duty Mobile.

2. For Android Devices - Android 10.0+ System:

Press and hold the **Y button + HOME button** simultaneously until the indicator lights flash rapidly. On your Android device, go to Bluetooth settings and select "arVin Gamepad" to pair. This mode is for most Android games.

3. For Nintendo Switch:

From the Switch HOME Menu, select "Controllers" > "Change Grip/Order". While on this screen, press and hold the **Y button + HOME button** on the arVin Gamepad until the indicator lights flash rapidly. The controller will pair with the Switch.

4. For PC (Wired Connection):

Connect the controller to your PC using the provided USB cable. The controller should be automatically recognized as a game controller.

Turbo Function

The controller features a 3-speed adjustable Turbo function (5/s, 12/s, 20/s) for rapid button presses.



Image: The arVin Gamepad with an overlay indicating the Turbo button and its function.

- **To Activate Turbo:** Press and hold the **TURBO button**, then press any of the A/B/X/Y/L1/R1/L2/R2 buttons to assign Turbo to that button. Repeat to change speed.
- **To Remove Turbo:** Press and hold the **TURBO button** for 3 seconds, then press the ' (SELECT) button to remove Turbo function from all buttons.

Macro Programming (Back Programmable Keys)

The AGR and AGL buttons on the back of the controller can be programmed for custom macro functions.

LONG PLAY TIME



550mAh Large Capacity Battery



2-3 Hours Charging Time



18-20 Hours Playing Time



Image: Rear view of the arVin Gamepad highlighting the AGR and AGL buttons and the 'Normal/Custom' switch for macro programming.

1. Switch the mode selector on the back to **Custom**' (right side) to activate Macro Programming.
2. Refer to the full instruction manual for detailed steps on programming specific button sequences to AGR and AGL.

Precision Rocker (L3 & R3 Support)

The joysticks offer precision control, supporting L3 and R3 functions (pressing down on the joysticks) for highly accurate positioning and smooth movement in games.

PRODUCT DETAILS

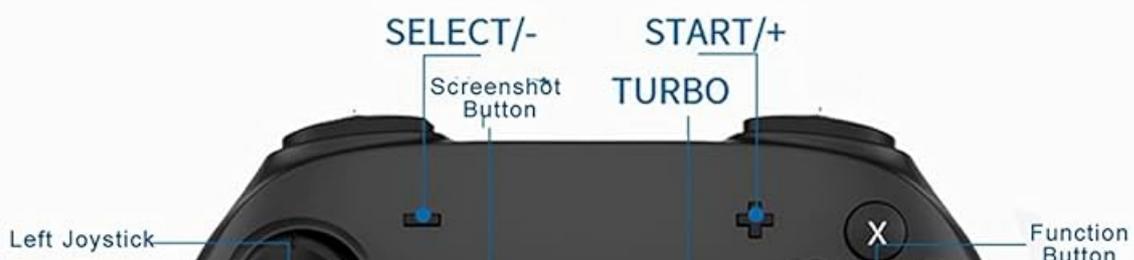




Image: Close-up of the arVin Gamepad joysticks, illustrating precision movement and L3/R3 support.

Cell Phone Holder

The integrated cell phone holder allows you to attach your smartphone directly to the controller for mobile gaming.



Cell Phone Holder

Image: The arVin Gamepad with a smartphone mounted in its integrated cell phone holder.

Supported Games

The arVin Gamepad is compatible with a wide range of controller-supported games on various platforms. For a comprehensive list, refer to the app stores or game descriptions.



Image: A collage of popular games like Call of Duty Mobile, Diablo Immortal, Genshin Impact, and Minecraft, indicating controller support.

MAINTENANCE

Proper care and maintenance will extend the life of your arVin Gamepad.

- **Cleaning:** Use a soft, dry cloth to clean the controller. Avoid using harsh chemicals or abrasive materials.
- **Storage:** Store the controller in a cool, dry place away from direct sunlight and extreme temperatures.
- **Battery Care:** Do not expose the battery to high temperatures or attempt to disassemble it. Charge the controller regularly, even if not in use, to maintain battery health.
- **Avoid Drops:** Protect the controller from drops and impacts, which can damage internal components.

TROUBLESHOOTING

If you encounter issues with your arVin Gamepad, try the following solutions:

- **Controller Not Connecting:**
 - a. Ensure the controller is fully charged.
 - b. Verify you are using the correct pairing mode (X+HOME for iOS, Y+HOME for Android/Switch).
 - c. Make sure Bluetooth is enabled on your device.
 - d. Forget the device in your device's Bluetooth settings and attempt to pair again.
 - e. Restart both the controller and your device.
- **Buttons Not Responding:**
 - a. Check if the controller is properly connected.
 - b. Ensure the game you are playing supports external controllers.
 - c. Reset the controller using the small reset button (often located in a pinhole on the back).
- **Charging Issues:**
 - a. Try a different USB cable and power adapter.
 - b. Ensure the USB port on the controller is clean and free of debris.
- **Input Lag or Disconnections:**
 - a. Ensure there are no obstructions between the controller and your device.
 - b. Move closer to your device to reduce interference.
 - c. Disconnect other Bluetooth devices that might be causing interference.

SPECIFICATIONS

Feature	Specification
Connectivity	Bluetooth 5.0, Wired (USB)
Compatibility	Nintendo Switch, iOS (13.0+), Android (10.0+), PC
Battery Capacity	550mAh
Charging Time	2-3 hours

Play Time	18-20 hours
Special Features	Adjustable Turbo Function, Macro Programming (Back Keys), 6-axis Gyroscope (for Switch), Vibration Function (for Switch), Cell Phone Holder

WARRANTY AND SUPPORT

For warranty information and technical support, please refer to the official arVin website or contact their customer service directly. Details are typically provided with your purchase documentation or on the product packaging.

© 2023 arVin. All rights reserved.