

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [ViewSonic](#) /

› [ViewSonic VX2418C 24 Inch Curved Gaming Monitor User Manual](#)

ViewSonic VX2418C

ViewSonic VX2418C 24 Inch Curved Gaming Monitor

USER MANUAL

Introduction

Welcome to the user manual for your new ViewSonic VX2418C 24-inch 1080p 1ms 180Hz Curved Gaming Monitor. This monitor is designed to provide an incredible viewing experience for both work and play, featuring an immersive 1500R curved screen and Full HD 1080p resolution. With a high 180Hz refresh rate, 1ms (MPRT) response time, and AMD FreeSync Premium technology, it ensures fluid, tear-free gameplay. The VX2418C also includes ViewSonic's exclusive ViewMode™ presets for optimized screen performance across various applications, and offers flexible connectivity with two HDMI (v2.0) inputs and one DisplayPort (v1.2) input.

What's in the Box

- VX2418C Monitor
- 3-pin Plug
- DisplayPort Cable
- AC/DC Adapter
- Quick Start Guide

WHAT'S IN THE BOX



VX2418C Monitor



Power Cable*



DisplayPort Cable



AC/DC Adapter



QuickStart Guide

*Power Cable varies by region

The ViewSonic VX2418C monitor and its included accessories: power cable, DisplayPort cable, AC/DC adapter, and Quick Start Guide.

Setup

Monitor Assembly

Carefully remove the monitor and stand components from the packaging. Attach the stand base to the stand neck, securing it with the provided screw. Then, align the assembled stand with the mounting points on the back of the monitor and secure it firmly. Ensure all connections are tight before proceeding.



The ViewSonic VX2418C monitor fully assembled with its stand.

Connecting the Monitor

1. Connect the AC/DC adapter to the monitor's power input and then plug it into a power outlet.
2. For video input, connect one end of the DisplayPort cable (included) or an HDMI cable (not included) to the corresponding port on your computer's graphics card.
3. Connect the other end of the video cable to either the DisplayPort (v1.2) or one of the two HDMI (v2.0) inputs on the monitor.
4. If desired, connect external speakers or headphones to the Audio Out port on the monitor.

FUTURE-PROOF INPUTS FOR FLEXIBLE CONNECTIVITY OPTIONS



Detailed view of the rear panel of the ViewSonic VX2418C monitor, showing the HDMI, DisplayPort, Audio Out, and power input connections, along with VESA mount points.

Operating

Power On/Off

Press the power button located on the monitor to turn it on or off. The power indicator light will illuminate when the monitor is active.

On-Screen Display (OSD) Menu Navigation

Use the navigation buttons, typically located on the back or bottom of the monitor, to access and navigate the On-Screen Display (OSD) menu. This menu allows you to adjust various settings such as brightness, contrast, color temperature, input source, and more.

ViewMode Presets

The monitor features ViewSonic's exclusive ViewMode™ presets, which offer optimized screen performance for different applications. These modes include settings for gaming (FPS, RTS, MOBA), movie watching, web browsing, and text editing. Select the appropriate ViewMode to enhance your visual experience.

High Refresh Rate and Fast Response Time

Experience ultra-smooth visuals with the monitor's 180Hz refresh rate and 1ms MPRT (Moving Picture Response Time). These features significantly reduce motion blur and ghosting, providing a competitive edge in fast-paced games.

GREAT VISUALS

For home entertainment and gaming



180Hz
Refresh
Rate

AMD
Freesync

1500R
Curved
Screen

Key visual features of the ViewSonic VX2418C, including its 180Hz refresh rate, AMD FreeSync Premium technology, and 1500R curved screen for immersive visuals.

AMD FreeSync Premium Technology

AMD FreeSync Premium technology synchronizes the monitor's refresh rate with your graphics card's frame rate, virtually eliminating screen tearing and stuttering for a fluid and seamless gaming experience.

Eye Care Technology

The VX2418C incorporates Flicker-Free technology and a Blue Light Filter to help reduce eye strain and fatigue during extended viewing sessions, promoting greater viewing comfort.

ENHANCED VIEWING TECHNOLOGY

Reduce eye strain. Enjoy more gaming sessions



BLUE LIGHT FILTER



FLICKER FREE

The ViewSonic VX2418C monitor features enhanced viewing technology, including a Blue Light Filter and Flicker-Free technology, designed to reduce eye strain during prolonged use.

Product Overview Video

Your browser does not support the video tag.

Official product video showcasing the ViewSonic OMNI Curved Gaming Monitor, highlighting its key features such as 1ms response time and 165Hz refresh rate for an immersive gaming experience.

Maintenance

Cleaning the Monitor

To clean the monitor screen, gently wipe it with a soft, lint-free cloth. For stubborn marks, dampen the cloth with a small amount of non-ammonia, non-alcohol based glass cleaner. Avoid spraying cleaner directly onto the screen. For the monitor casing, use a soft, dry cloth.

Storage

When storing the monitor for an extended period, ensure it is powered off and disconnected from all cables. Store it in a cool, dry place, preferably in its original packaging, to protect it from dust and physical damage.

Troubleshooting

Common Issues and Solutions

Problem	Possible Cause	Solution
No Power	Power cable not connected or power outlet not working.	Ensure the power cable is securely connected to the monitor and a working power outlet. Check the power adapter.
No Signal	Video cable not connected or incorrect input source selected.	Verify the video cable (DisplayPort/HDMI) is securely connected to both the monitor and the computer. Use the OSD menu to select the correct input source.
Image is blurry or distorted	Incorrect resolution or refresh rate settings.	Adjust the display resolution and refresh rate in your computer's display settings to match the monitor's native resolution (1920x1080) and desired refresh rate (up to 180Hz).
Screen Tearing/Stuttering	AMD FreeSync Premium not enabled or graphics driver issues.	Ensure AMD FreeSync Premium is enabled in both the monitor's OSD menu and your graphics card's control panel. Update graphics drivers to the latest version.
No Sound from Monitor Speakers	Volume too low, audio output not selected, or external speakers connected.	Increase monitor volume via OSD. Ensure the monitor is selected as the audio output device in your computer's sound settings. If using external speakers, ensure they are properly connected and powered.

Specifications

Feature	Specification
Model Number	VX2418C
Screen Size	24 Inches
Panel Type	Curved
Resolution	1920x1080 (Full HD)
Refresh Rate	180Hz
Response Time	1ms (MPRT)
Curvature	1500R
Adaptive Sync Technology	AMD FreeSync Premium


Feature	Specification
Connectivity	2 x HDMI (v2.0), 1 x DisplayPort (v1.2), 1 x Audio Out
VESA Mount Compatible	100x100 mm
Dimensions (LxWxH)	8.2 x 21.3 x 16.3 inches
Weight	9.7 pounds

Warranty and Support

ViewSonic provides comprehensive support for its products. The VX2418C monitor comes with a **3-Year Warranty**, ensuring peace of mind regarding your investment. Additionally, US-based customer support is available to assist with any inquiries or technical issues you may encounter.

For detailed information and further assistance, please refer to the official User Guide PDF:

[Download Official User Guide \(PDF\)](#)

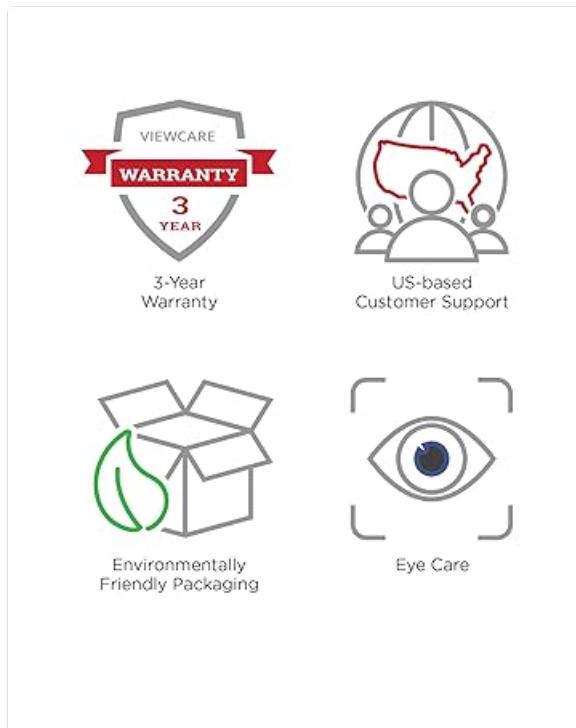

Overview of ViewSonic's commitment to quality, including a 3-year warranty, US-based customer support, environmentally friendly packaging, and integrated eye care features.