

[Manuals.plus](#) /

› [Beastron](#) /

› Rii Mini Wireless Bluetooth Keyboard with Touchpad, Support Bluetooth +(RF) 2.4GHz Wireless Connection for Smartphones, PC, Tablet, Laptop TV Box iOS Android Windows Mac.Black

Beastron i8+BT

Rii Mini Wireless Bluetooth Keyboard with Touchpad

USER MANUAL

1. Introduction and Overview

Thank you for choosing the Rii Mini Wireless Bluetooth Keyboard with Touchpad. This compact and versatile keyboard offers dual-mode connectivity (Bluetooth and 2.4GHz RF) for seamless control across a wide range of devices, including smartphones, PCs, tablets, laptops, and TV boxes. Its integrated touchpad provides intuitive navigation, making it an ideal solution for home entertainment, travel, and various computing needs.



Image 1.1: The Rii Mini Wireless Bluetooth Keyboard, showcasing its compact design and integrated touchpad.

2. Package Contents

Please check the box for the following items:

- 1 x Rii Mini Wireless Bluetooth Keyboard (Model: i8+BT)
- 1 x Wireless USB Dongle
- 1 x Micro USB Charging Cable
- 1 x User Manual

Package Contents



1*Rii keyboard
1*Charge/data cable
1*user manual

Image 2.1: All items included in the Rii Mini Wireless Bluetooth Keyboard package.

3. Features


- **Dual Mode Connectivity:** Supports both Bluetooth 4.0 and 2.4GHz RF wireless connections.
- **Integrated Touchpad:** High-sensitivity touchpad for precise cursor control, supporting multi-finger gestures.
- **Full QWERTY Keyboard:** 92-key layout for efficient typing.
- **Rechargeable Battery:** Built-in BL-5B 300mAh lithium-ion battery for extended use.
- **Backlight Function:** Illuminated keys for use in low-light conditions.
- **Compact & Portable:** Lightweight and pocket-sized design (5.9 x 3.9 x 0.5 inches, 5.3 ounces).
- **Wide Compatibility:** Compatible with Smartphones, PC, Tablet, Laptop, TV Box, iOS, Android, Windows, and Mac operating systems.

Mini Portable

Power Your Mobile Life



Image 3.1: The compact dimensions of the Rii Mini Keyboard, highlighting its portability.

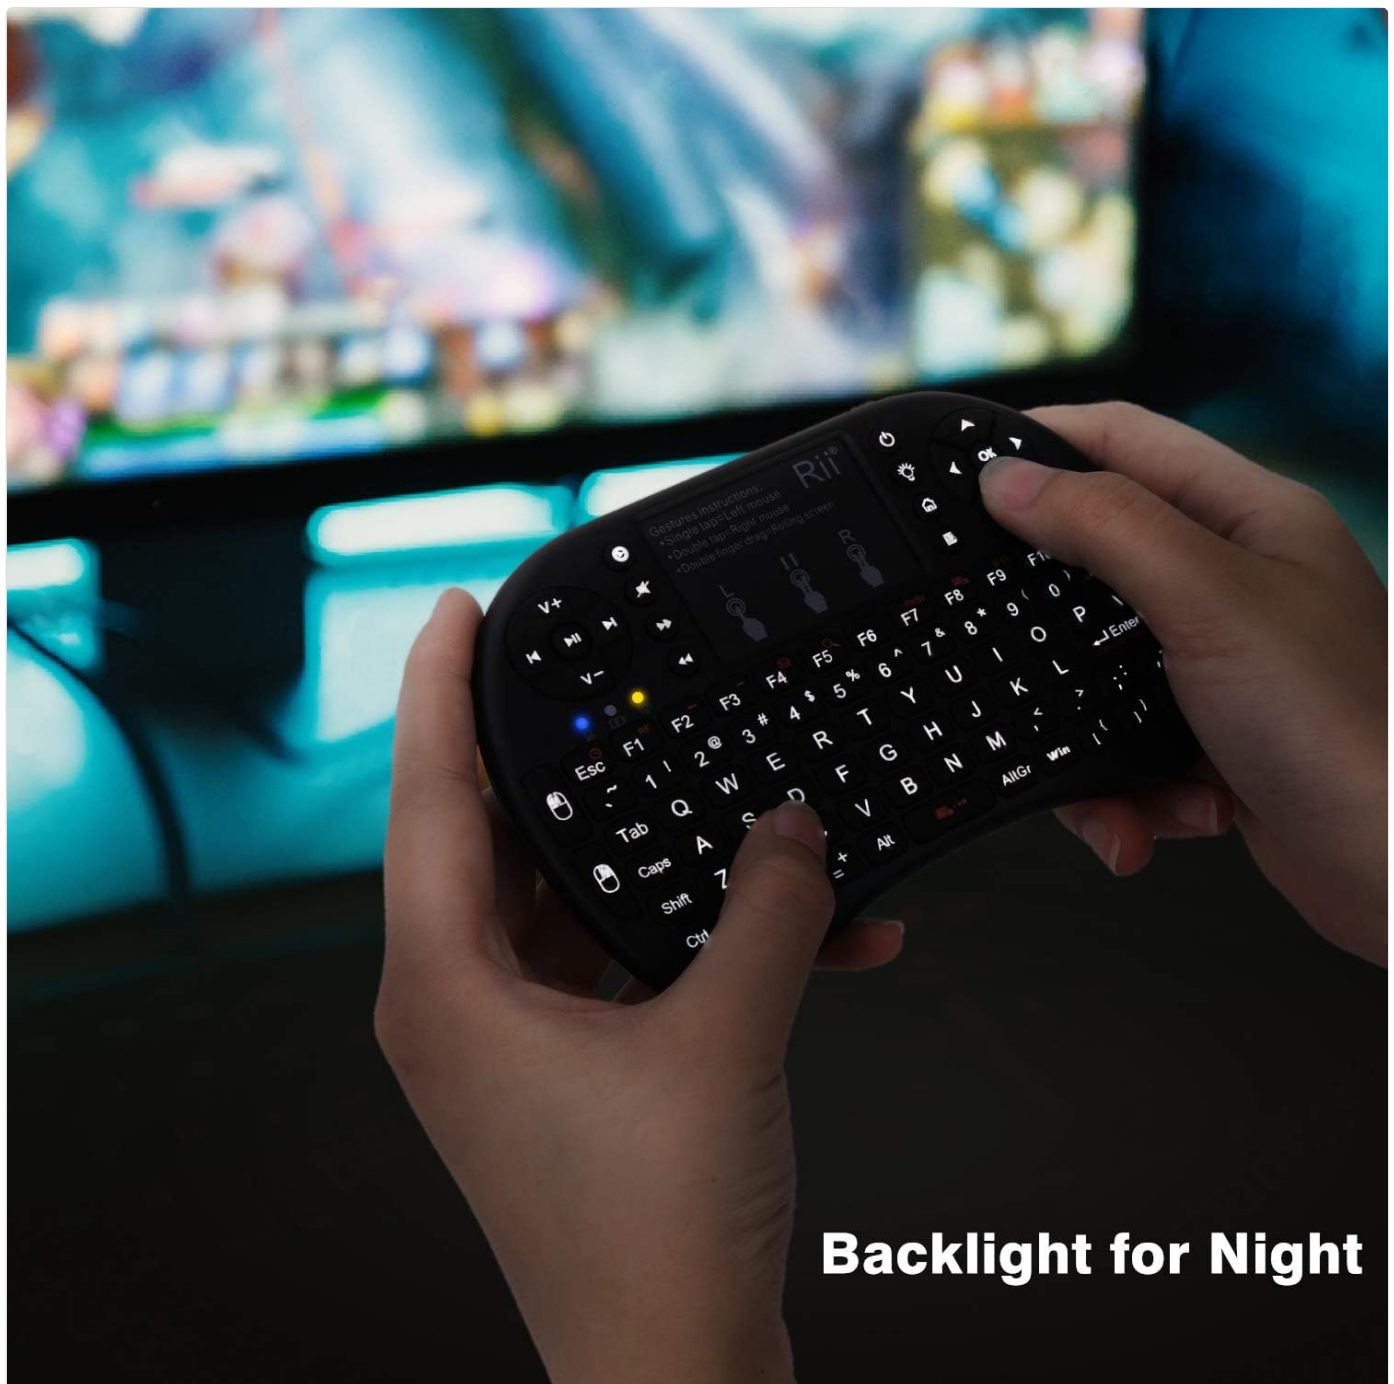

Backlight for Night

Image 3.2: The Rii Mini Keyboard with its backlight feature activated, ideal for night use.

4. Setup

4.1 Charging the Keyboard

Before first use, fully charge the keyboard using the provided Micro USB cable. Connect the Micro USB end to the keyboard's charging port and the USB-A end to a standard USB power source (e.g., computer USB port, USB wall adapter). The charging indicator light will illuminate during charging and turn off when fully charged.

4.2 2.4GHz RF Wireless Connection

1. Locate the wireless USB dongle, usually stored in a compartment on the keyboard itself.
2. Insert the USB dongle into an available USB port on your device (PC, Laptop, TV Box, etc.).
3. Turn on the keyboard by sliding the power switch to the 'ON' position.
4. The keyboard should automatically connect to the dongle. If not, press **Fn + Tab** to switch to 2.4G RF mode.

4.3 Bluetooth Connection

1. Ensure the keyboard is powered on.
2. Press the **Bluetooth Pair Button** (often indicated by a Bluetooth icon or specific Fn key combination) to enter pairing mode. The Bluetooth indicator light will blink.
3. On your device (Smartphone, Tablet, PC), go to Bluetooth settings and search for new devices.
4. Select "Rii Mini Keyboard" or a similar name from the list of available devices.
5. If prompted, enter the pairing code displayed on your device using the Rii Mini Keyboard and press Enter.
6. Once paired, the Bluetooth indicator light will stop blinking and remain solid.

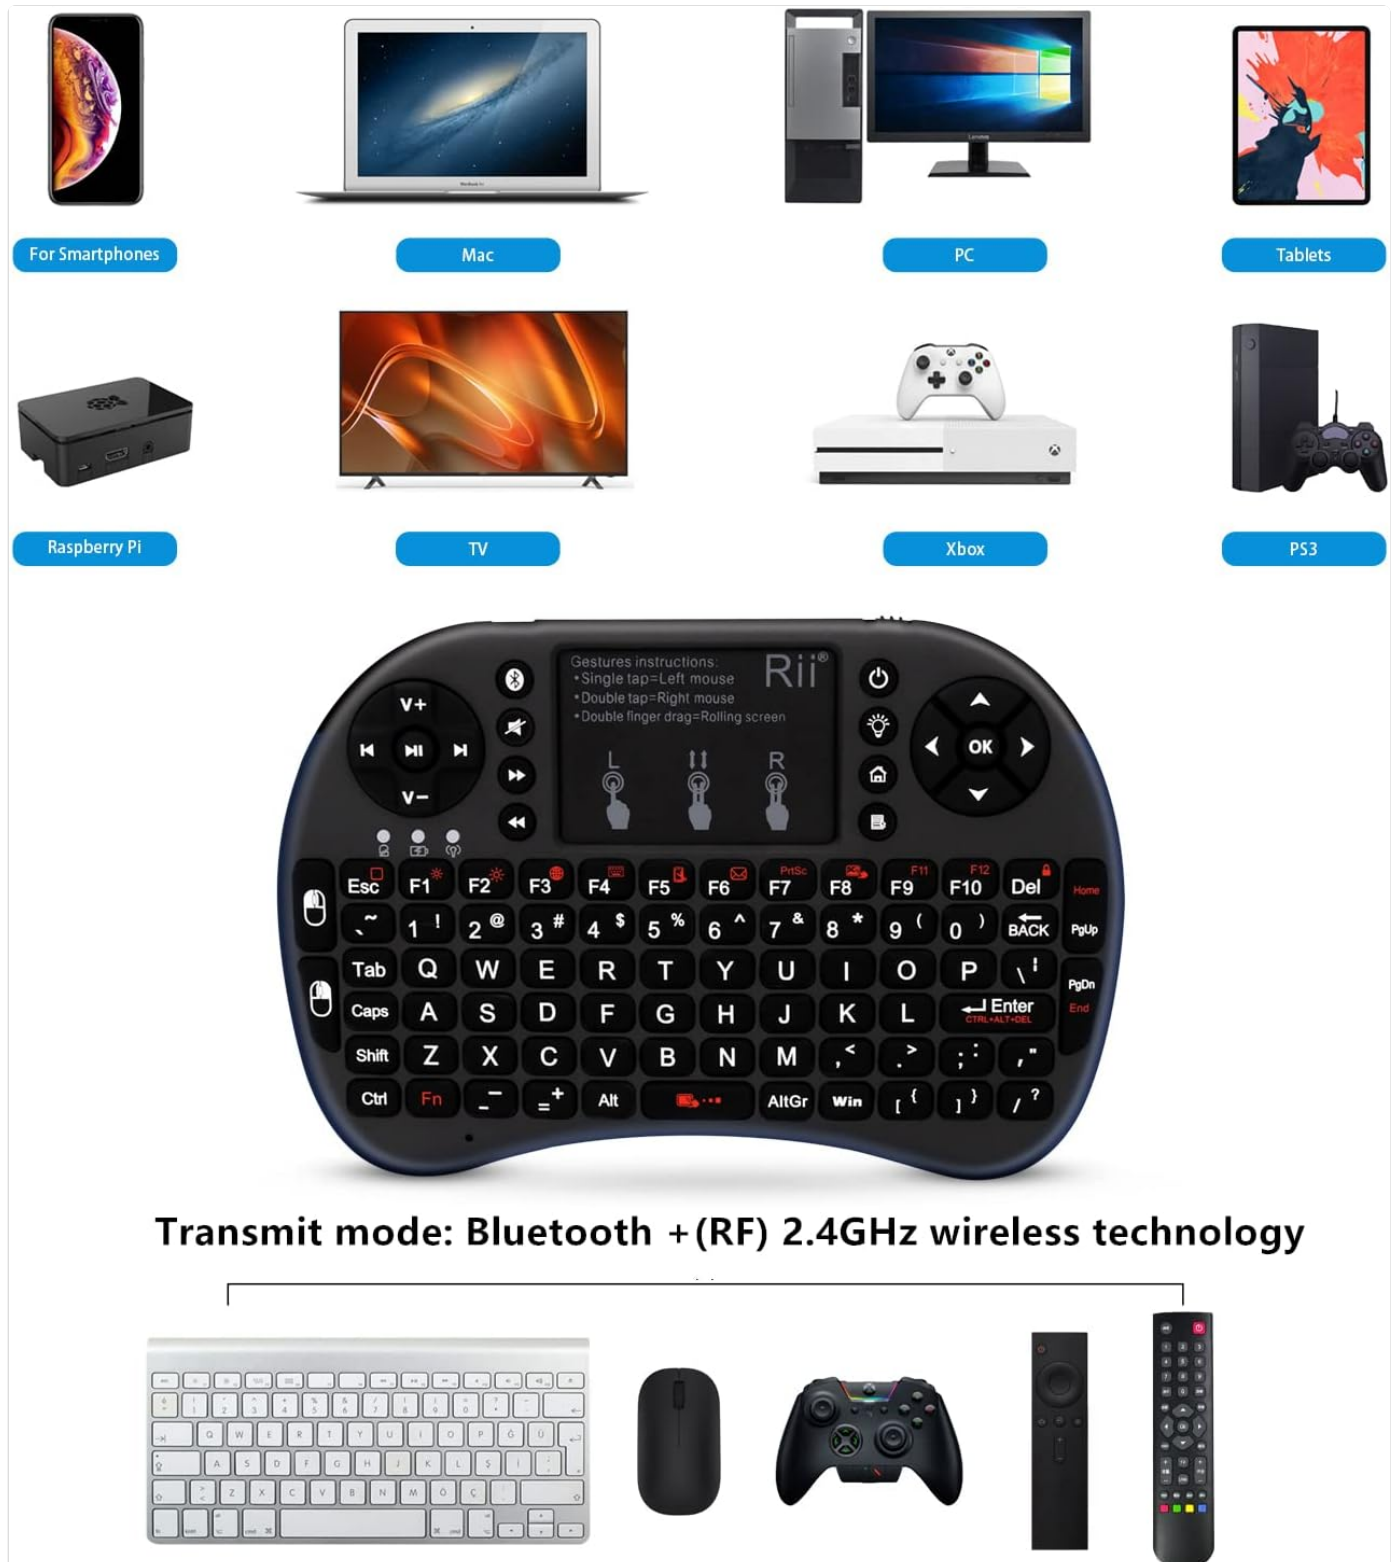


Image 4.1: The Rii Mini Keyboard demonstrating its compatibility with smartphones, Mac, PC, tablets, Raspberry Pi, TV, Xbox, and PS3.

5. Operating Instructions

5.1 Basic Keyboard Usage

The keyboard functions like a standard QWERTY keyboard. Simply type as you would on a full-sized keyboard. Special characters and numbers can be accessed using the **Fn** key in combination with the corresponding keys.

5.2 Touchpad Gestures

The integrated touchpad supports various gestures for navigation:

- **Single Tap:** Left mouse click.
- **Double Tap:** Open item/execute.
- **Two Fingers Click:** Right mouse click.
- **Two Fingers Drag:** Scroll screen (vertical scrolling only).
- **Fn + One Finger Movement:** Alternative scrolling method.



Image 5.1: Visual guide to touchpad gestures including single tap for left click, double click to open, two fingers click for right click, and two fingers drag for scrolling.

5.3 Function Keys (Fn Combinations)

The keyboard features several function keys (F1-F12) and multimedia controls accessible by holding the **Fn** key and pressing the desired key. Some common combinations include:

- **Fn + Esc:** Standard browser start/home key.
- **Fn + F1/F2:** Display brightness down/up.
- **Fn + F6:** Opens email client.
- **Fn + F8:** Enables/disables tap-to-click on the touchpad.
- **Light Bulb Icon:** Toggles keyboard backlight on/off.
- **House Icon:** Home key (browser home on Windows, Android home).
- **Menu Icon:** Context menu (right-click menu).

5.4 Power Management

- **Power Button:** Acts as a sleep button for the connected PC.
- **Dormancy Button:** Puts the keyboard into a low-power sleep mode to conserve battery.
- **Waking the Keyboard:** Press any key to wake the keyboard from sleep. The first key press is not lost.



Image 5.2: The Rii Mini Keyboard being used as a remote control, portable keyboard, gaming keyboard, and handheld keyboard.

6. Maintenance

6.1 Cleaning

To clean the keyboard, gently wipe it with a soft, dry cloth. For stubborn dirt, a slightly damp cloth can be used, but ensure no moisture enters the device. Avoid using harsh chemicals or abrasive cleaners.

6.2 Battery Care

To prolong battery life:

- Avoid fully discharging the battery frequently.
- Charge the keyboard regularly, even if not in constant use.
- Store the keyboard in a cool, dry place when not in use for extended periods.

7. Troubleshooting

If you encounter issues with your Rii Mini Keyboard, please refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Keyboard not connecting via 2.4GHz RF	Dongle not properly inserted, incorrect mode, out of range.	Ensure dongle is fully inserted. Press Fn + Tab to switch to 2.4G RF mode. Reduce distance to dongle (optimal range is within 20ft, line of sight recommended).
Keyboard not connecting via Bluetooth	Not in pairing mode, already paired with another device, device Bluetooth off.	Ensure Bluetooth is enabled on your device. Press the Bluetooth Pair Button on the keyboard. Forget previous pairings on your device and re-pair.
Keys repeating or input delayed	Low battery, signal interference, software issue.	Charge the keyboard fully. Move closer to the receiver/device. Restart the keyboard and the connected device. Check for driver updates on your PC.
Touchpad unresponsive or erratic	Tap-to-click disabled, dirty touchpad, software issue.	Press Fn + F8 to ensure tap-to-click is enabled. Clean the touchpad surface. Restart the keyboard and device.
Backlight not working	Backlight off, low battery.	Press the Light Bulb Icon button to toggle the backlight. Ensure the keyboard is sufficiently charged.

8. Specifications

Feature	Detail
Transmit Mode	Bluetooth + (RF) 2.4GHz wireless technology
Power Supply	BL-5B 300mAh Lithium Polymer battery (included)
Working Current	<68mA
Sleeping Current (Class 1)	130uA
Product Weight	124.5g (4.4 ounces)
Product Dimensions	5.9 x 3.9 x 0.5 inches (150 x 99 x 13 mm)
Number of Keys	92
Connectivity Technology	Bluetooth, USB
Compatible Devices	Laptop, PC, Tablet, Smartphones, TV Box, iOS, Android, Windows, Mac
Manufacturer	Beastron
Model Number	i8+BT

9. Warranty and Support

This product comes with a standard manufacturer's warranty. Please refer to the product packaging or the retailer's website for specific warranty terms and duration. For technical support, troubleshooting assistance, or inquiries about your product, please contact Beastron customer service through their official website or the platform where you purchased the

product. Keep your purchase receipt as proof of purchase for warranty claims.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page’s manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question