

Puxinat V28

Puxinat V28 WiFi Projector User Manual

Model: V28 | Brand: Puxinat

INTRODUCTION

Thank you for choosing the Puxinat V28 WiFi Projector. This manual provides detailed instructions for setting up, operating, and maintaining your projector to ensure a seamless and enjoyable viewing experience. Please read this manual thoroughly before using the product and keep it for future reference.

PRODUCT OVERVIEW

The Puxinat V28 is a high-performance portable projector designed for home cinema and various multimedia applications. It features advanced display technology and versatile connectivity options.

Key Features

- **1080P Full HD Enhanced Display:** Delivers sharp and vibrant images with 180 ANSI Lumens (over 7500 Lux) brightness, offering a clearer picture than native 720P projectors.
- **Advanced Color Technology:** Utilizes the latest 3LCD color calibration and adjustment technology for accurate and dynamic color reproduction.
- **Easy Screen Synchronization:** Supports wireless (WiFi) and wired (USB cable) screen mirroring for smartphones and tablets.
- **Wide Compatibility:** Equipped with multiple ports including HDMI, USB, TF card, VGA, and AV for connecting various devices like TV sticks, game consoles, PCs, smartphones, laptops, DVD players, and external speakers.
- **Large Projection Size:** Capable of projecting images up to 270 inches, providing an immersive home cinema experience. A 100-inch projection screen is included.
- **Efficient Cooling System:** Innovative cooling design reduces fan noise by 80% for a quieter viewing environment.
- **Integrated Audio:** Features a unique dual built-in speaker system for excellent sound quality.
- **User-Friendly Adjustments:** Easy-to-use focus and keystone correction for optimal image display.



The Puxinat V28 WiFi Projector creates an immersive viewing experience, projecting a large, vibrant image in a home setting.


SETUP

Unpacking and Placement

Carefully remove all components from the packaging. Place the projector on a stable, flat surface or mount it according to your preference. Ensure there is adequate ventilation around the projector. For optimal viewing, position the projector perpendicular to the screen. The ideal projection distance can vary, but generally, a greater distance results in a larger image.



100" Projection screen included

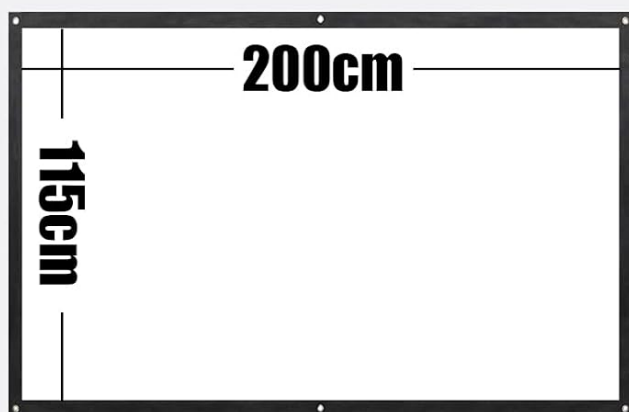

The Puxinat V28 projector comes with a 100-inch projection screen for immediate setup and enjoyment.

Power Connection

1. Connect the power cable to the projector's power input port.
2. Plug the other end of the power cable into a standard electrical outlet.
3. Press the power button on the projector or the remote control to turn on the device.

OPERATING INSTRUCTIONS

Basic Controls

The projector can be operated using the control panel on the device or the included remote control. Common functions include power on/off, source selection, menu navigation, and volume control.

Source Selection

To select an input source (e.g., HDMI, USB, AV), press the 'Source' button on the remote control or the projector's control panel.

Navigate through the options using the arrow keys and confirm your selection.



Experience vibrant and automatically calibrated colors with the Puxinat V28 projector, perfect for gaming and movies.

CONNECTIVITY

Wireless Connection (WiFi Screen Mirroring)

The Puxinat V28 supports wireless screen mirroring for smartphones and tablets. Ensure your device and the projector are connected to the same WiFi network. Follow the on-screen instructions to initiate screen mirroring from your iOS or Android device.

Wired Connection (USB Screen Mirroring)

For a stable wired connection, you can use your original USB charging cable to directly synchronize your Android or iOS smart devices with the projector.



Connect your smartphone or tablet to the Puxinat V28 projector via WiFi or a USB cable for easy screen mirroring.

HDMI, VGA, AV, USB, TF Card Connections

The projector offers a variety of ports for connecting external devices:

- **HDMI:** Connect TV sticks, game consoles, laptops, and other HDMI-enabled devices.
- **VGA:** Connect older computers or laptops.
- **AV:** Connect DVD players or other devices with AV output.
- **USB:** Play media files directly from a USB flash drive or connect compatible devices.
- **TF Card:** Insert a TF (Micro SD) card to play media files.
- **AUX:** Connect external speakers or headphones for enhanced audio.



The Puxinat V28 projector offers comprehensive connectivity options for a wide range of devices.

Note on Streaming Services: Due to copyright protection, direct screen mirroring of certain streaming services like Netflix, Prime Video, and Disney+ may not be supported. For these services, it is recommended to connect a TV stick (e.g., Fire TV Stick, Chromecast) via the HDMI port.


IMAGE ADJUSTMENT

Focus Adjustment

To achieve a clear image, rotate the focus ring on the projector lens until the image appears sharp and in focus on the screen.

Keystone Correction

If the projected image appears trapezoidal (wider at the top or bottom), use the keystone correction dial to adjust the image geometry until it is rectangular. This corrects for projection angles that are not perfectly perpendicular to the screen.

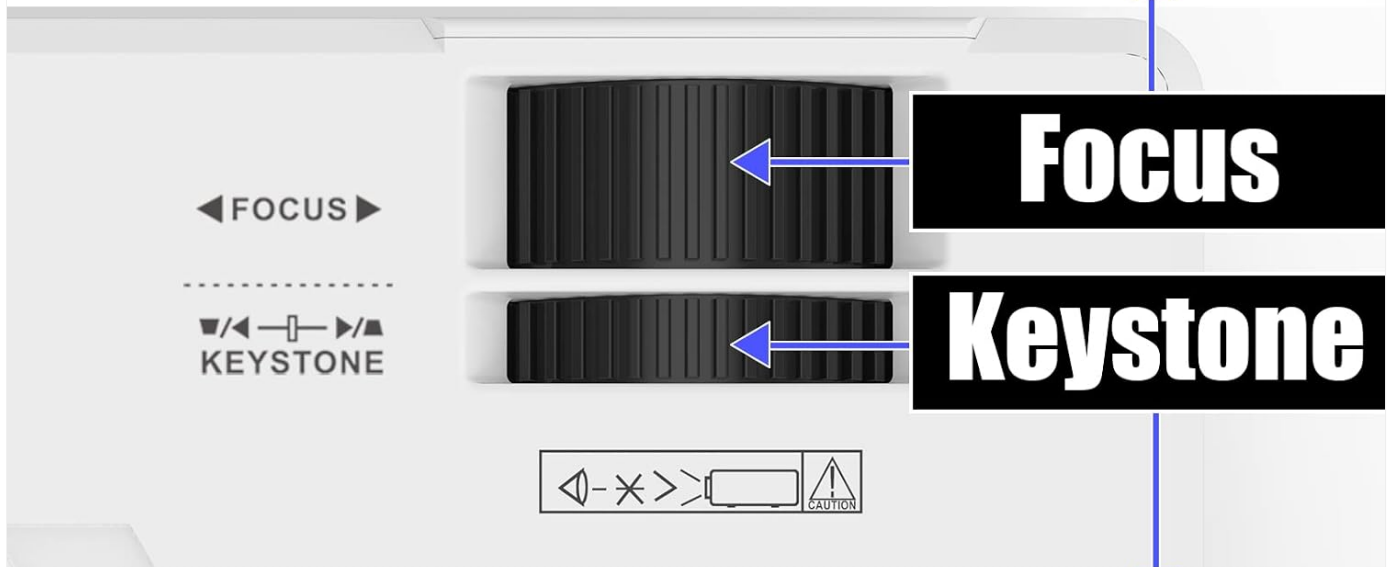

Adjust the focus and keystone dials on the projector to ensure a clear and perfectly rectangular image.

MAINTENANCE

Cleaning the Projector

- **Lens:** Use a soft, lint-free cloth and a lens cleaning solution specifically designed for optical surfaces. Avoid abrasive materials.
- **Exterior:** Wipe the projector's exterior with a soft, dry cloth. Do not use harsh chemicals or solvents.
- **Ventilation Ports:** Regularly check and clean the ventilation ports to prevent dust buildup, which can affect performance and lead to overheating. Use a soft brush or compressed air.

Lamp Life

The Puxinat V28 projector uses an LED light source with a long operational lifespan. Proper ventilation and regular cleaning will help maximize the life of the light source.

TROUBLESHOOTING

Problem	Possible Cause	Solution
No image displayed	Power cable loose; incorrect input source; lens cap on.	Check power connection; select correct input source; remove lens cap.
Image blurry	Focus not adjusted; projector too close/far from screen.	Adjust the focus ring; reposition the projector.
Image trapezoidal	Projector not perpendicular to screen.	Use keystone correction dial to adjust.
No sound	Volume too low; external audio device not connected; audio format not supported.	Increase volume; check external audio connections; try a different audio source.
Screen mirroring not working for streaming apps	Copyright protection.	Use an HDMI-connected streaming device (e.g., TV stick).
Remote control not working	Batteries dead; obstruction between remote and projector.	Replace batteries; ensure clear line of sight to IR receiver.

SPECIFICATIONS

Feature	Specification
Brand	Puxinat
Model Number	V28
Display Resolution	1920 x 1080 (1080p Full HD)
Maximum Display Resolution	1080p Full HD Pixels
Brightness	180 ANSI Lumens (7500 Lumen)
Contrast Ratio	6000:1
Display Type	LCD
Maximum Image Size	100 Inches (up to 270 inches possible)
Connectivity Technology	HDMI, USB, VGA, AV, TF Card, WiFi
Compatible Devices	Smartphone, Tablet, TV Stick, Game Console, PC, Laptop, DVD Player, External Speakers
Recommended Product Uses	Home Cinema
Form Factor	Traditional Tabletop Projector
Mounting Type	Table Mount
Image Quality Enhancement	1080P Full HD Enhanced Technology

Feature	Specification
Video Encoding	H.264
UPC	850035640661

WARRANTY AND SUPPORT

For warranty information, technical support, or any questions not covered in this manual, please refer to the warranty card included with your product or contact Puxinat customer service directly. Contact details can typically be found on the manufacturer's official website or on the product packaging.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Email

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Details

Submit question