

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

- › [Swann](#) /
- › [Swann NVR 4K Bullet Camera SONHD-875WLB-JP Instruction Manual](#)

Swann SONHD-875WLB-JP

Swann NVR 4K Bullet Camera SONHD-875WLB-JP Instruction Manual

Model: SONHD-875WLB-JP

1. INTRODUCTION

This manual provides comprehensive instructions for the Swann NVR 4K Bullet Camera, Model SONHD-875WLB-JP. This advanced security camera system offers 4K resolution, thermal and motion detection, color night vision, and robust weather resistance. Please read this manual carefully before installation and operation to ensure proper use and optimal performance.



The Swann NVR 4K Bullet Camera, a high-resolution surveillance solution.

2. SETUP

2.1 Unboxing and Checking Contents

Before beginning installation, carefully open the package and verify that all components are present and undamaged. The package typically contains the NVR recorder, cameras, LAN cables, power adapters, mouse, and documentation.



The product packaging for the Swann NVR system.



All components laid out after unboxing, including cameras, cables, and the NVR recorder.

2.2 Connecting the Monitor and Recorder

Connect your monitor to the NVR recorder using the provided HDMI cable. Ensure a secure connection at both ends.

2.3 Powering On the Recorder

Connect the power adapter to the recorder and then plug it into a wall outlet. Turn on the recorder using the power switch. The Swann logo will appear on the monitor. Please wait a moment for the system to boot up.

Warning: Avoid using multi-outlet power strips as they may cause unstable operation due to insufficient power. Always connect the recorder directly to a wall outlet.

2.4 Connecting the Mouse

Connect the included USB mouse to one of the USB ports on the front or rear of the recorder. Both USB ports are functional.


2.5 Connecting the Cameras

Connect each camera to the NVR recorder using the provided LAN cables. Ensure all cameras are connected and displaying video on the monitor before proceeding with installation.

Works with Swann Security Night2Day™ COLOR NIGHT VISION works with Google アシスタント



ACCEL JAPAN
アンバサダー ヒロミ

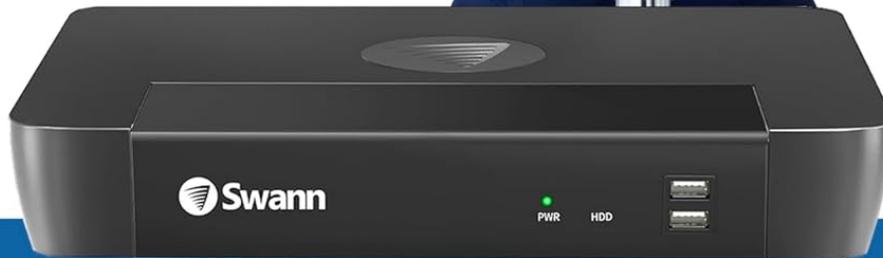

NVRレコーダー (Network Video Recorder)

IPカメラ(ネットワーク)からのビデオストリームを受信しデジタル形式で録画・保存する機器です。ネットワーク経由でビデオデータを受信し映像の管理と制御が行えます。

A Swann NVR 4K Bullet Camera showing its LAN cable connection.

2.6 Waterproof Installation for Camera Cables

For outdoor camera installations, it is crucial to properly install the waterproof caps on the LAN cable connections to prevent water ingress. Follow these steps:

1. Thread the camera cable through the small cap, then the large cap, and finally the rubber cap.
2. Attach the rubber ring to the camera cable connector.
3. Connect the LAN cable to the camera cable.
4. Push the rubber cap over the connection, then screw the large cap onto the camera cable connector to secure it.
5. Finally, screw the small cap onto the large cap to complete the waterproof seal.

Note: The rubber cap should protrude 3-5mm from the small cap for proper sealing.



The IP66-rated camera is designed for outdoor use, but should be installed under eaves or in locations not directly exposed to heavy rain.

Important: While the camera is IP66 rated for dust and water resistance, it is not completely waterproof. For outdoor installations, place the camera under eaves or in areas not directly exposed to rain. Humidity can cause the camera lens to fog up, which is not a malfunction and is not covered by the product warranty. Your understanding is appreciated.

2.7 Setup Video Guide

This video demonstrates the unboxing, connection of the monitor, power, mouse, and cameras for the Swann NVR system.

This video provides instructions on how to properly install the waterproof caps for the camera cables during outdoor setup.

3. OPERATING THE SYSTEM

3.1 Initial Setup Wizard

Upon first power-on, the system will display a setup wizard. Follow the on-screen prompts to configure the following:

- **Language Selection:** Choose your preferred language.
- **Password Creation:** Create a strong password (at least 6 characters, including numbers and letters). Re-enter to confirm.

- **Email Address:** Enter your email for password recovery and notifications. Be careful with '.' (dot) placement.
- **Time Zone:** Select your local time zone (e.g., GMT+9:00 Seoul, Tokyo, Osaka, Sapporo).
- **Date and Time:** If connected to the internet, click 'Update Now' to synchronize. If not connected, manually set the date and time.

After completing these steps, click 'Finish' to apply the settings. The system may restart.

3.2 Network Connection Check

Verify the network connection status by checking the icon at the bottom right of the monitor. A green checkmark indicates a successful connection.

Warning: Mobile routers are not supported. Please use a Wi-Fi router connected via a wired LAN.

3.3 App Setup and Device Pairing

To view camera footage on your smartphone, download the Swann Security app from Google Play or the App Store. Create an account by entering your name, email, and password. After successful registration, you can pair your NVR device by scanning the QR code on the recorder. Follow the in-app instructions to complete the pairing process.



Screenshot of the Swann Security app interface, showing multiple camera views.

Note: Only one account can be registered per recorder. Multiple devices can log in to the same account, but simultaneous connections are limited to 3 devices to prevent communication speed degradation or live image display issues.

3.4 Operating Video Guide

This video guides you through the initial software setup of the NVR recorder, including language, password, email, and time zone settings.

This video demonstrates how to set up the Swann Security app on your smartphone and pair it with your NVR system.

4. MAINTENANCE

4.1 HDD Formatting

To format the Hard Disk Drive (HDD) and delete all recorded data:

1. From the menu at the bottom left of the screen, select 'Setup'.
2. From the menu on the left side of the screen, select 'Device'.
3. Select the submenu 'HDD' at the top.
4. Check the checkbox next to the HDD and click 'Format HDD'.
5. Enter the password you set for the recorder and click 'Authenticate'.
6. Read the displayed warning and click 'OK'. The formatting process will begin. Please wait until it completes.

Note: Formatting may take some time. If you wish to completely erase recorded data, disconnect the cameras before formatting the HDD.

4.2 Resetting Settings

To reset the recorder's settings to factory defaults (without deleting recorded data):

1. From the menu at the bottom left of the screen, select 'Setup'.
2. From the menu on the left side of the screen, select 'Advanced Settings'.
3. Select the submenu 'Maintain' at the top.
4. Click 'Load Defaults'. In the displayed window, click 'All' and then 'Save'.

The registered settings will be initialized, and the system will restart. Please wait for the process to complete. Once the setup wizard screen appears, new settings can be registered.

5. TROUBLESHOOTING

5.1 Playback Issues

If playback functionality does not work correctly, it may be due to a decrease in communication speed between your smartphone, router, and recorder. Please try the following three solutions:

- Uninstall and reinstall the Swann Security app.
- Restart your router.
- Perform an NVR recorder initialization (refer to the 'Recorder Initialization Guide' video).

If the playback function still does not work after trying the above three steps, please contact our support center.

5.2 Troubleshooting Video Guide

This video provides guidance on troubleshooting common issues with the NVR system, particularly focusing on playback problems.

6. SPECIFICATIONS

Feature	Specification
Resolution	Max 4K (8MP)
Field of View	80 degrees
Microphone	Yes
Audio Range	5 meters
Night Vision Distance	Max 40m (monochrome), 10m (color)
IR Cut Filter	Yes
PIR Sensor	Yes
PIR Sensor Range	7 meters
Siren	No
Waterproof Rating	IP66
Operating Temperature	-30°C to 50°C
Material	Plastic
Dimensions (LxWxH)	14.2 x 7.1 x 7.1 cm
Weight	790 g
Connectivity	Wireless, Ethernet
Recommended Use	Night Vision

7. WARRANTY

This Swann NVR 4K Bullet Camera comes with a 1-year warranty. Please retain your proof of purchase for warranty claims.

8. SUPPORT

For any inquiries or technical assistance, please contact our support center via email:

support@uniqstyle.co.jp

If you find it difficult to install the camera yourself, UNIQ offers an installation service. Please visit the UNIQ official website for more details and a free estimate.

[UNIQ Official Website](#)