

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

> [Taloya](#) /

> [TALOYA 30W LED Ceiling Light \(Model 8091\) - User Manual](#)

Taloya 8091

TALOYA 30W LED Ceiling Light (Model 8091) - User Manual

Indirect Lighting, Dimmable, Color Adjustable for 6-8 Tatami Rooms

INTRODUCTION

Thank you for purchasing the TALOYA 30W LED Ceiling Light, Model 8091. This manual provides detailed instructions for the safe and efficient use of your new ceiling light. Please read this manual thoroughly before installation and operation, and keep it for future reference.

PRODUCT FEATURES

- **Indirect Lighting with Dimming:** Enjoy soft, ambient indirect lighting with adjustable brightness.
- **Stepless Dimming and Color Temperature Adjustment:** Adjust brightness from 0% to 100% and color temperature from 3000K (warm white) to 6500K (cool white) to suit any mood or activity.
- **Sleep Mode:** A gentle indirect light mode that gradually dims and turns off after 30 minutes, promoting relaxation and better sleep.
- **Dust and Insect Resistant Design:** The sealed structure between the main body and cover prevents dust and insects from entering, ensuring cleanliness and longevity.
- **Ultra-Thin, Flat Design:** Utilizes LED side-emitting technology and a highly transparent guide plate to achieve a slim profile, making your room feel more spacious.
- **Wide Coverage:** The square design provides a larger illumination area compared to circular lights of the same size, brightening corners and reducing shadows.
- **2.4GHz Remote Control:** An upgraded second-generation remote control with an operating range of up to 10 meters for convenient adjustment of light settings. (CR2025 coin battery required, sold separately).

SPECIFICATIONS

Model Number	8091
Brand	Taloya
Dimensions	Φ330 x H24 mm (approx. 13 x 13 x 0.94 inches)

Rated Power Consumption	Approx. 26W (main light) + 4W (indirect light)
Luminous Flux	3,510 lm
Energy Efficiency	135 lm/W
Rated Voltage	100V (50/60Hz)
Applicable Room Size	6-8 Tatami (approx. 9.7 - 13 square meters)
Dimming	Stepless (0-100%)
Color Temperature	Stepless (3000K - 6500K)
Special Features	Indirect Light, Night Light, Sleep Mode (30 min)
Remote Control	2.4GHz Bluetooth (CR2025 battery not included)

IMPORTANT SAFETY INFORMATION

Please read and understand all safety instructions before installation and use. Failure to follow these instructions may result in electric shock, fire, or personal injury.

- Always turn off the power at the circuit breaker before installing or servicing the light fixture.
- Installation should be performed by a qualified electrician if you are unsure about the process.
- Do not use this product in damp or wet locations.
- Ensure the mounting surface can support the weight of the fixture.
- Do not disassemble or modify the light fixture.
- Keep the remote control batteries out of reach of children.

SETUP AND INSTALLATION

This ceiling light is designed for easy installation without the need for electrical construction, provided your ceiling has a compatible wiring device.

1. Check Ceiling Wiring Device

Ensure your ceiling has one of the following wiring devices. If so, installation can be done easily without electrical work.

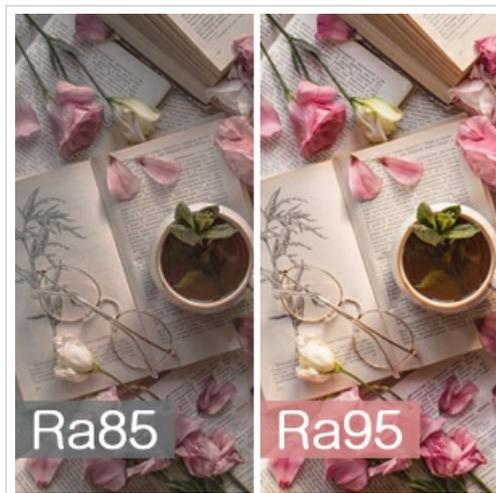


Image: Examples of compatible ceiling wiring devices.

2. Installation Steps

1. **Turn off Power:** Before starting, ensure the power to the ceiling fixture is turned off at the main circuit breaker.
2. **Attach Mounting Plate:** Secure the light's mounting plate to your existing ceiling wiring device.
3. **Connect Wiring:** Connect the light fixture's wiring to the ceiling wiring device. Ensure connections are secure.
4. **Mount Light Fixture:** Attach the main light fixture body to the mounting plate. Twist or secure it according to the design until it clicks into place.
5. **Restore Power:** Once securely installed, turn the power back on at the circuit breaker.



Image: Installation diagram for the ceiling light.

Note: The Japanese version includes an adapter, resulting in a protrusion of about 1 cm from the main unit compared to the original American version.

OPERATING INSTRUCTIONS

Your TALOYA LED Ceiling Light comes with a remote control for easy operation.

Remote Control Functions



Image: Remote control layout and button functions.

- **ON/OFF:** Press to turn the light on or off.
- **Brighten/Dim:** Use the up/down arrows to adjust the brightness (stepless dimming).
- **Color Temperature Adjustment:** Use the left/right arrows to change the color temperature from 3000K (warm

white) to 6500K (cool white) (stepless adjustment).

- **Sleep Mode (Moon icon):** Activates a gentle indirect light that gradually dims and turns off after 30 minutes.
- **Mode Switch (M button):** Cycles through preset lighting modes or switches between main light and indirect light.
- **Main Light/Backlight (Circular arrow icon):** Toggles between main illumination and indirect (backlight) illumination.

Pairing the Remote Control

If the remote control does not respond after inserting batteries, you may need to pair it with the light fixture:

1. Turn on the light using the wall switch.
2. Within 8 seconds of turning on the light, press the "ON" button on the remote control.
3. The light will flash three times, indicating successful pairing.

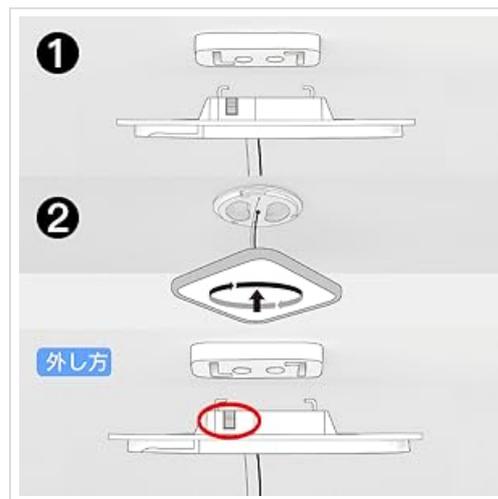


Image: Remote control pairing instructions.

Sleep Mode Function

The sleep mode is designed to create a relaxing environment before sleep. The indirect light gradually softens and automatically turns off after 30 minutes. This function helps regulate the autonomic nervous system, promoting a more restful sleep.

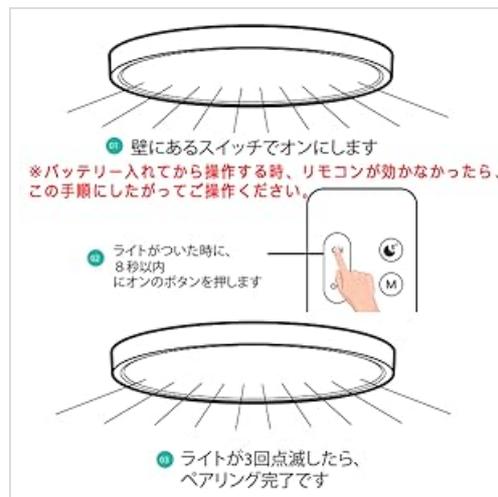


Image: Sleep mode feature with 30-minute timer.

MAINTENANCE

To ensure the longevity and optimal performance of your TALOYA LED Ceiling Light, follow these simple maintenance

guidelines:

- **Cleaning:** Before cleaning, always turn off the power at the circuit breaker. Wipe the light fixture with a soft, dry cloth. Do not use abrasive cleaners, solvents, or harsh chemicals, as these may damage the finish or electrical components.
- **Dust and Insect Prevention:** The sealed design minimizes dust and insect entry. Periodically inspect the exterior for any accumulated dust and wipe clean.
- **Remote Control Battery Replacement:** The remote control uses a CR2025 coin battery. If the remote control's range or responsiveness decreases, replace the battery. Ensure correct polarity when inserting the new battery.

TROUBLESHOOTING

If you encounter any issues with your TALOYA LED Ceiling Light, please refer to the following common problems and solutions:

- **Light does not turn on:**
 - Check if the power switch is ON.
 - Verify that the circuit breaker is not tripped.
 - Ensure the light fixture is correctly installed and wired.
 - If using the remote, check its battery.
- **Remote control not working:**
 - Replace the CR2025 coin battery in the remote control.
 - Re-pair the remote control with the light fixture (refer to "Pairing the Remote Control" section).
 - Ensure there are no obstructions between the remote and the light.
- **Light flickers or dims unexpectedly:**
 - Ensure the power supply is stable.
 - Check for loose wiring connections.
 - If the issue persists, contact customer support.

If these solutions do not resolve the problem, please contact TALOYA customer support for assistance.

WARRANTY AND SUPPORT

TALOYA provides a reliable **5-year warranty** for this product. If you encounter any issues, malfunctions, or damages within the 5-year warranty period, please contact us. We will respond free of charge.

When contacting support, please provide your order number and a photo or video showing the defect or issue.

お困りのところはこちらはございませんか

商品が届いたけどなにかの故障、損害が起きたら...すべては
メーカーにて無償でご対応させていただきます!



servicejp@taloya.comまでお気軽にお問い合わせください

※品質メールサービス（土、日、祝日を除く）すぐに対応できます。なにか問題がございましたら、注文番号および不具合が現れる写真あるいは動画をメールにてお気軽にお問い合わせください。

Image: TALOYA 5-Year Warranty information.

Customer Support Email: servicejp@taloya.com

Our quality email service is available and we aim to respond promptly (excluding Saturdays, Sundays, and holidays). Returns are also accepted within 90 days for any reason.



© 2023 TALOYA. All rights reserved.