

[manuals.plus](#) /

› [Avatar Controls](#) /
› [Avatar Controls AWP12L 2-Pack Energy Monitoring Smart Plugs User Manual](#)

Avatar Controls AWP12L

Avatar Controls AWP12L 2-Pack Energy Monitoring Smart Plugs User Manual

MODEL: AWP12L

1. Introduction

Thank you for choosing the Avatar Controls AWP12L Smart Plugs. These smart plugs allow you to control your electronic devices remotely, monitor energy consumption, and set schedules for automated operation. They are compatible with popular voice assistants and smart home applications like Smart Life and Tuya.



Image: Two white Avatar Controls AWP12L smart plugs, each featuring two standard US outlets and a blue LED ring on one end, indicating power status.

2. Safety Information

- Ensure the smart plug is used within its specified electrical ratings (120V AC).
- Do not disassemble or modify the device.
- Avoid exposing the device to water or humid environments.
- Keep out of reach of children.
- Do not plug in appliances that exceed the maximum load capacity of the smart plug.

3. Package Contents

- 2 x Avatar Controls AWP12L Smart Plugs
- 1 x User Manual

4. Product Overview

Each AWP12L smart plug features two independently controllable outlets and a multi-function button/indicator light. The indicator light provides status feedback during setup and operation.

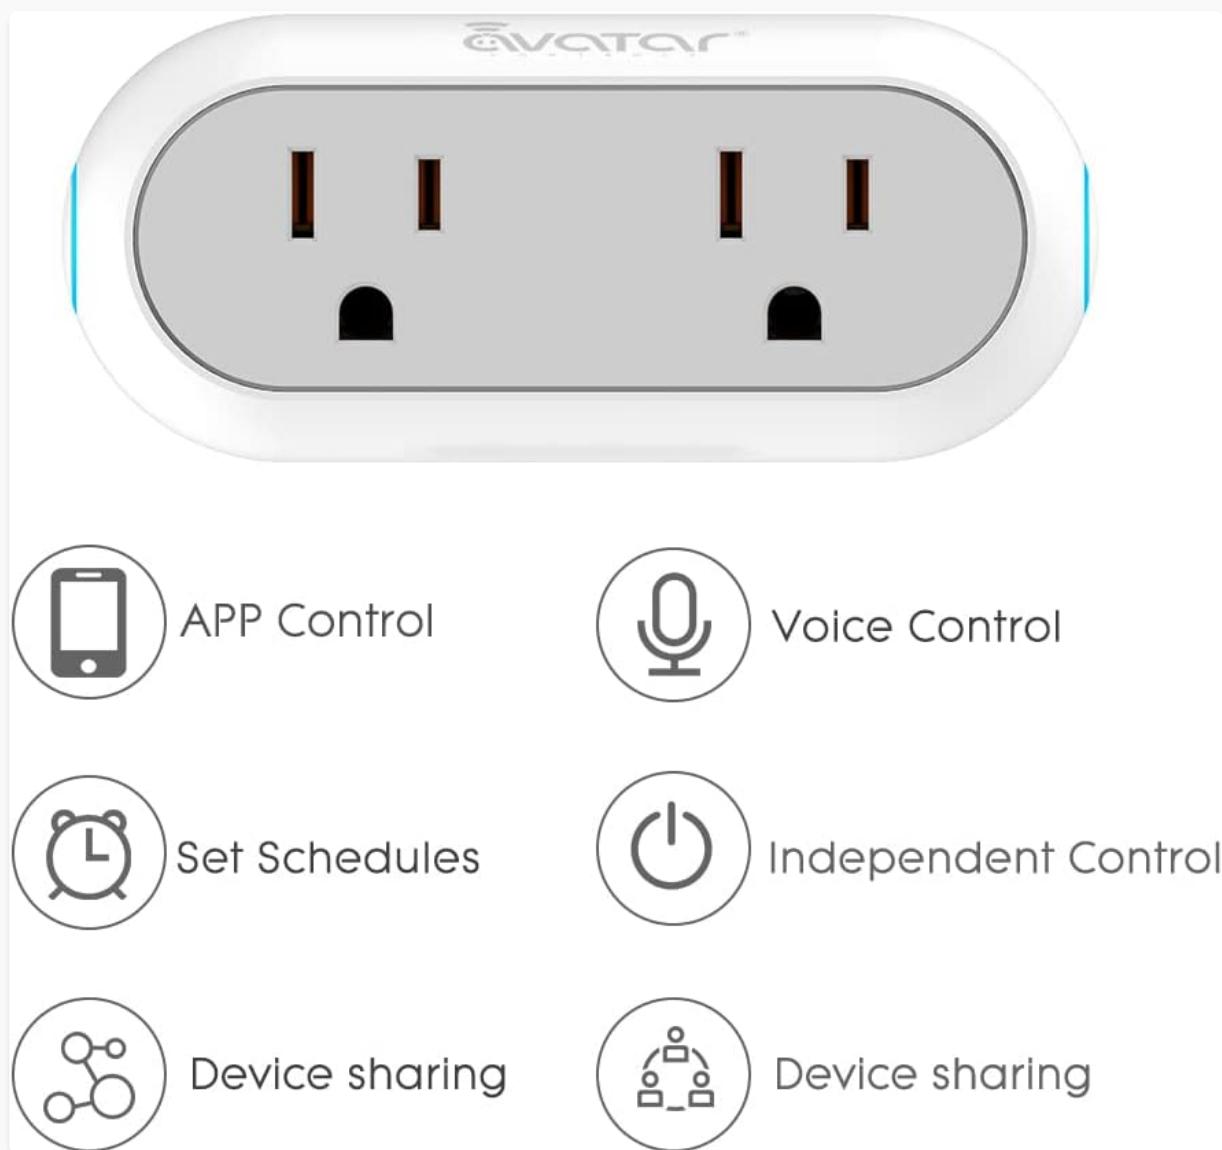


Image: A close-up top-down view of a single Avatar Controls smart plug, highlighting its two outlets. Surrounding icons illustrate key features: APP Control, Voice Control, Set Schedules, Independent Control, and Device Sharing.

5. Setup

5.1 App Installation

1. Download the **Smart Life** or **Tuya Smart** app from the Apple App Store or Google Play Store.
2. Register an account or log in if you already have one.

5.2 Network Requirements

The smart plugs require a **2.4GHz Wi-Fi network** for initial connection. Ensure your router is broadcasting a 2.4GHz signal. If you have a dual-band router, you may need to temporarily disable the 5GHz band or ensure your phone is connected to the 2.4GHz network during setup.

5.3 Pairing Process

1. Plug the smart plug into a power outlet.
2. Open the Smart Life or Tuya Smart app.
3. Tap the "+" icon in the top right corner to add a device.

4. Select "Electrical Outlet" or "Wi-Fi Power Strip" from the device list.
5. **Reset the Smart Plug:** Press and hold the power button on the side of the smart plug for approximately 5 seconds until the indicator light starts blinking rapidly. If it blinks slowly, press and hold again for 10 seconds until it blinks rapidly. This indicates pairing mode.
6. Confirm the indicator light is blinking rapidly in the app and proceed.
7. Enter your 2.4GHz Wi-Fi network password.
8. The app will begin connecting to the device. Once connected, you can rename the smart plug and its individual outlets.

Troubleshooting Tip: If the rapid blinking method fails, try the slow blinking method. After plugging in, hold the power button for 5 seconds until it turns off, then hold it again for 10 seconds until the light blinks **slowly**. In the app, choose the alternative connection method (often called 'AP Mode' or 'Compatible Mode') and connect your phone's Wi-Fi directly to the smart plug's hotspot (usually named 'SmartLife-XXXX' or 'Tuya-XXXX'). The app will then complete the connection.



Image: An Avatar Controls smart plug is shown plugged into a standard wall outlet, with a lamp's power cord connected to one of its outlets. This illustrates the plug's compact design and how it integrates into a home environment.

6. Operating Instructions

6.1 Basic On/Off Control

- **Via App:** Open the Smart Life/Tuya Smart app, select your smart plug, and tap the power icon for each individual outlet to turn it on or off.
- **Manually:** Press the physical power button on the side of the smart plug to toggle power for both outlets simultaneously.



Remote Control

Mobile phone remote control switch

Image: This image combines two scenes: a smart plug connected to a lamp in a home setting, and a man using a smartphone to control it via an app interface. The app screen shows options for controlling 'Smart Socket' and individual switches, highlighting remote control capabilities.

6.2 Voice Control

The smart plugs are compatible with Alexa, Google Assistant, SmartThings, and Siri. To enable voice control:

1. Link your Smart Life/Tuya Smart account to your preferred voice assistant app (e.g., Amazon Alexa app, Google Home app).
2. Discover devices within the voice assistant app.
3. Once discovered, you can use voice commands such as:
 - "Alexa, turn on the living room lamp."
 - "Hey Google, turn off the fan."

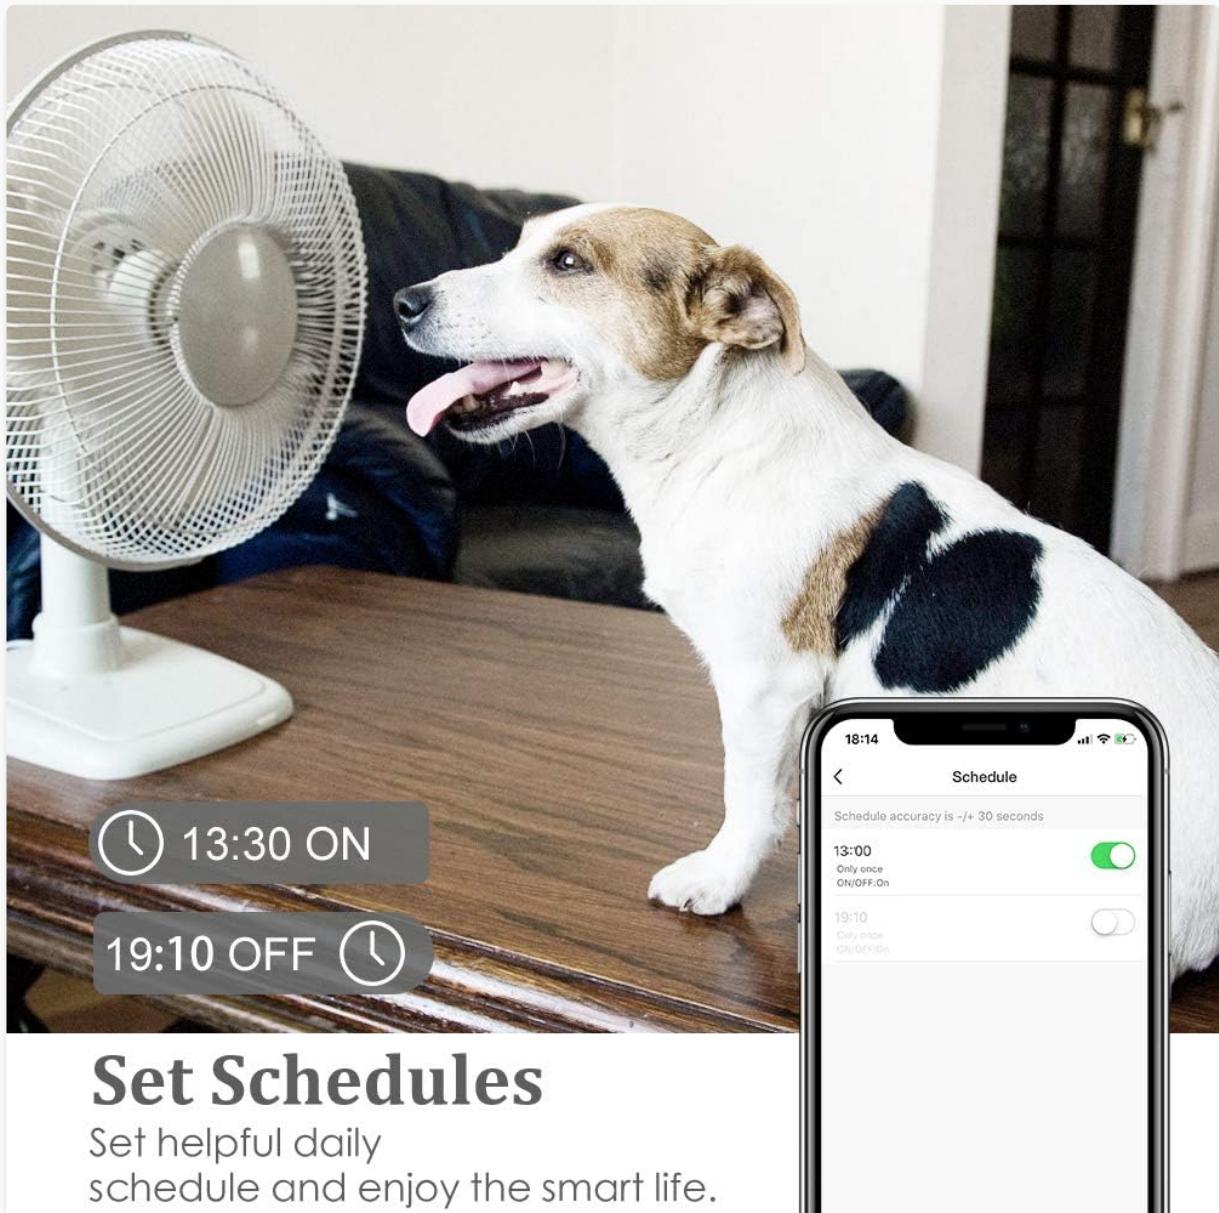


Image: A living room scene featuring a lamp connected to an Avatar Controls smart plug, surrounded by Amazon Alexa and Google Home smart speakers. A speech bubble indicates 'Alexa, turn off the light' and 'OK', demonstrating seamless voice control integration.


6.3 Energy Monitoring

View real-time and historical power consumption for connected devices directly within the Smart Life/Tuya Smart app. This feature helps you track usage and optimize energy efficiency.

6.4 Timer and Schedule Function

Set custom schedules for your devices to turn on or off automatically. This can be used for lighting, fans, or other appliances to automate your home routines.

1. In the app, select your smart plug.
2. Tap on the 'Schedule' or 'Timer' option.
3. Add new schedules by setting desired on/off times and repetition days.

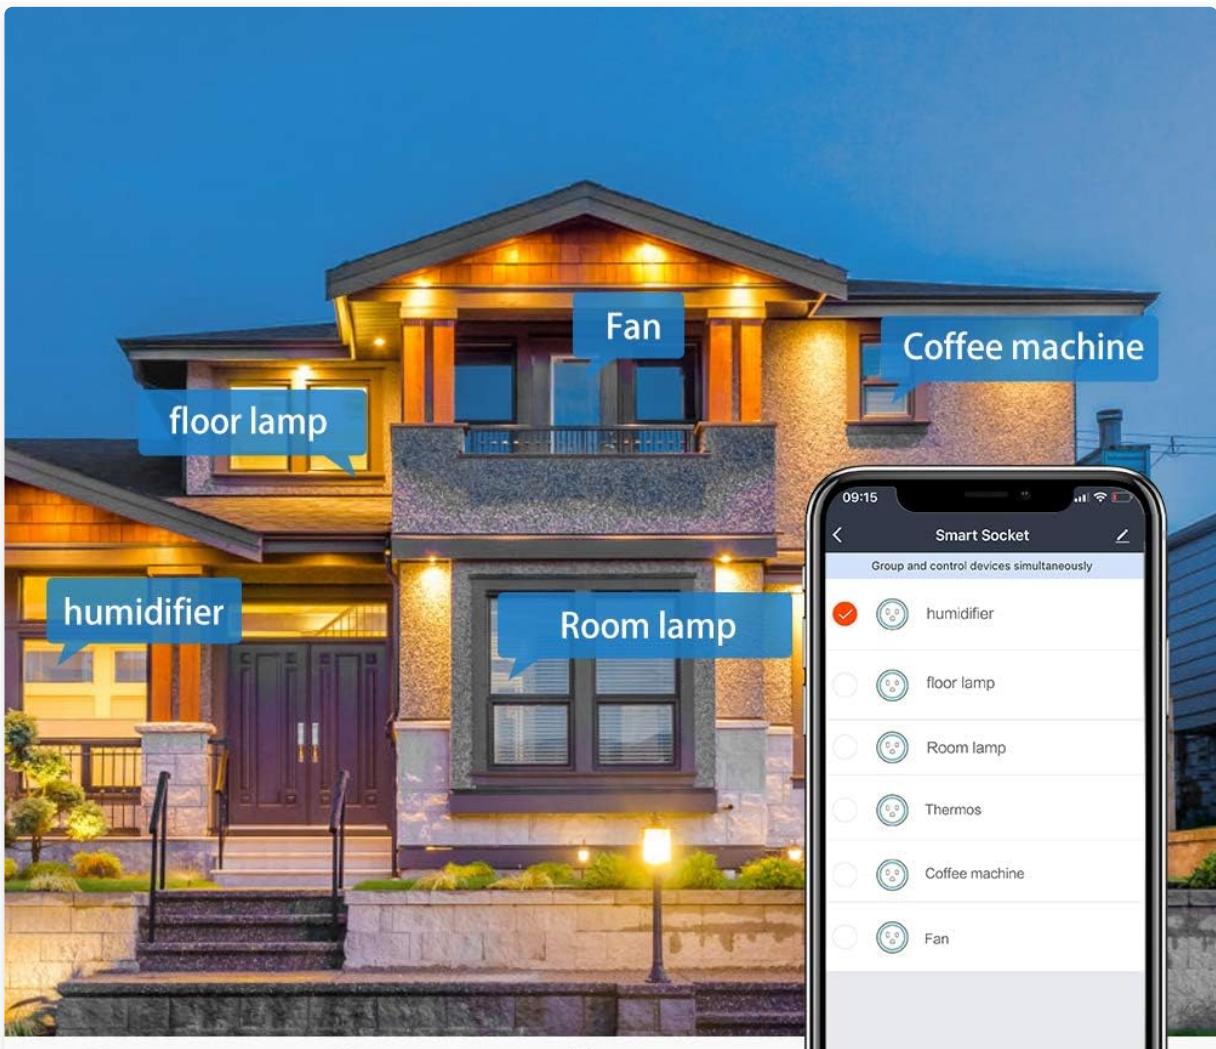

Group Control

Create a group to manage all your smart plug

Image: A dog sits comfortably in front of a fan, which is powered by an Avatar Controls smart plug. A smartphone screen overlays the image, showing the 'Schedule' function within the app, with options to set 'ON' and 'OFF' times, such as 13:30 ON and 19:10 OFF.

6.5 Group Control

Manage multiple smart plugs or individual outlets simultaneously by creating groups within the app. This allows for unified control of several devices with a single command.

1. In the app, go to the main device list.
2. Look for an option to 'Create Group' or 'Group Management'.
3. Select the smart plugs or outlets you wish to group together.



Convenient Life

Friendly for Disabled and
Elderly People.

Image: An exterior view of a house with labels pointing to various appliances (e.g., 'floor lamp', 'humidifier', 'coffee machine'), indicating smart home integration. A smartphone screen displays the 'Smart Socket' app interface, showing a list of devices under 'Group and control devices simultaneously', demonstrating the group control feature.

6.6 Device Sharing

Share control of your smart plugs with family members or other authorized users through the app, allowing multiple individuals to manage the devices.

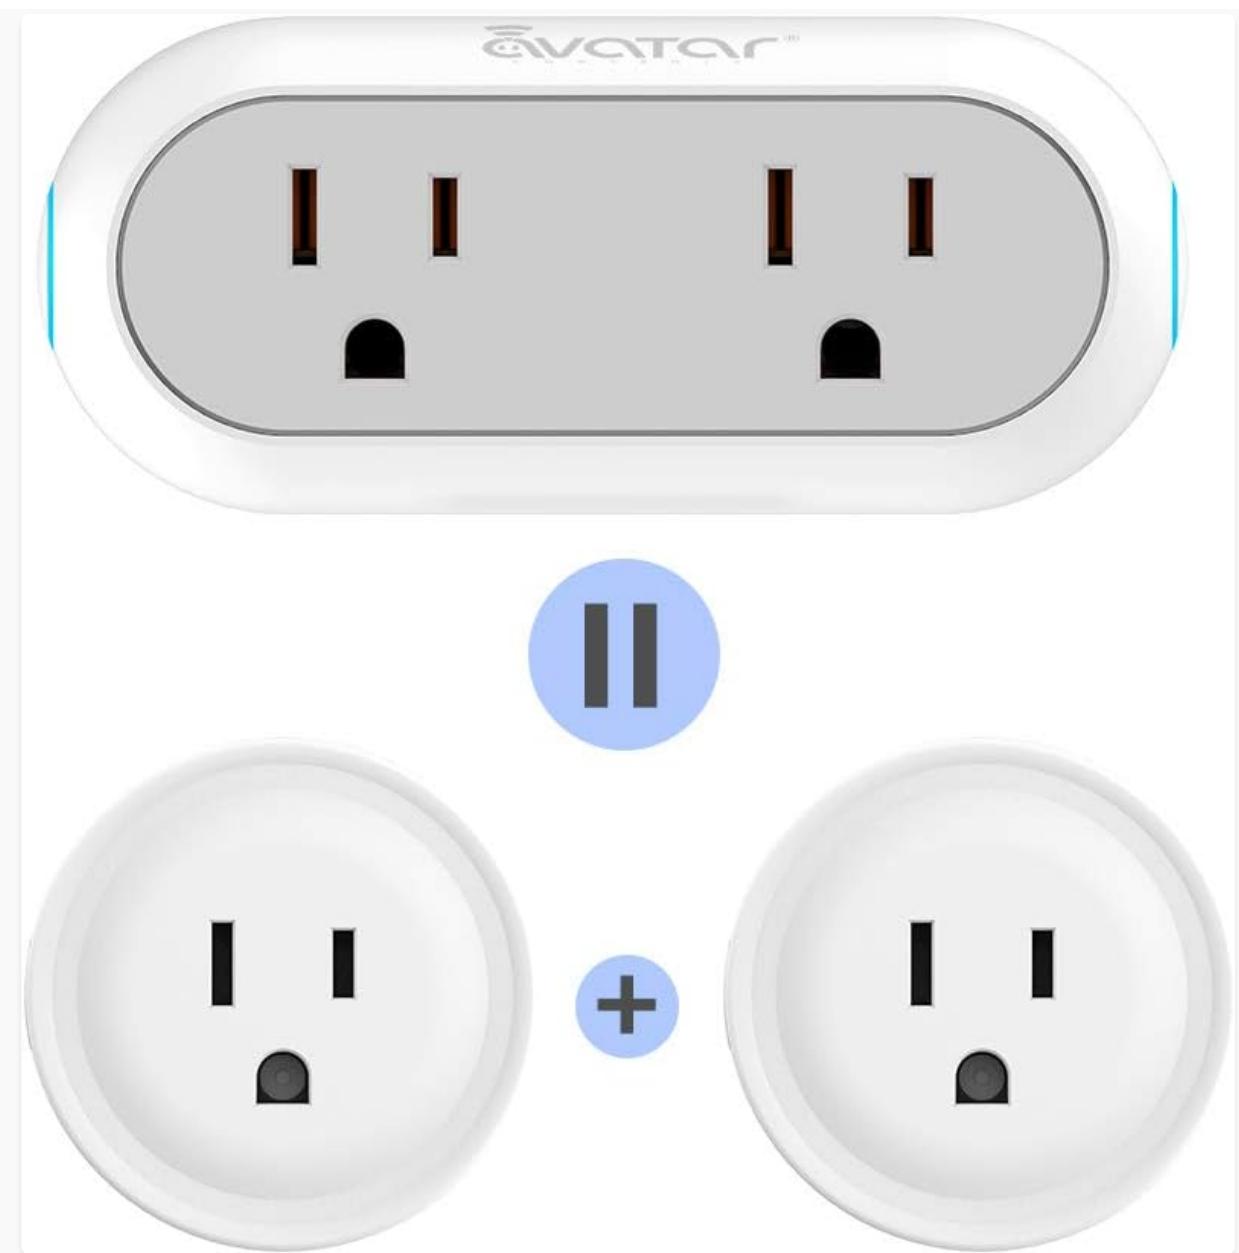


Image: A man in a wheelchair is shown comfortably using a smartphone, with the app interface for controlling smart plugs visible. This image emphasizes the convenience and accessibility of the smart plugs for various users.

7. Maintenance

- Clean the smart plug with a dry, soft cloth. Do not use liquid cleaners.
- Store in a cool, dry place when not in use.

8. Troubleshooting

• Cannot connect to Wi-Fi:

- Ensure your Wi-Fi network is 2.4GHz. The smart plug does not support 5GHz Wi-Fi.
- Check your Wi-Fi password for accuracy.
- Move the smart plug closer to your Wi-Fi router.
- Try the alternative pairing method (AP Mode/Slow Blinking) as described in [Section 5.3](#).

• Smart plug not responding:

- Check if the smart plug is properly plugged into the wall outlet.

- Verify your Wi-Fi connection is stable.
- Restart the smart plug by unplugging it and plugging it back in.
- Check the app for any error messages.

- **Voice control not working:**

- Ensure your Smart Life/Tuya Smart account is correctly linked to your voice assistant.
- Try rediscovering devices in your voice assistant app.
- Use the exact device names you set in the Smart Life/Tuya Smart app.

9. Specifications


Feature	Specification
Model Number	AWP12L
Voltage	120V AC
Plug Format	Type B (US Standard)
Number of Wires	3
Material	Acrylonitrile Butadiene Styrene (ABS)
Item Weight	7.2 ounces
Product Dimensions	1 x 1 x 1 inches
Switch Type	1-way
Mounting Type	Plug In
Switch Style	Voice
UPC	850024028562
Certification	CE

10. Warranty and Support

This Avatar Controls product comes with a **1-year warranty** from the date of purchase. For warranty claims or technical support, please contact Avatar Controls customer service through the retailer's platform or their official website.

© 2025 Avatar Controls. All rights reserved.

Related Documents - AWP12L

 <p>Brookstone Dual Smart Plug USER MANUAL</p> <p>FCC ID: 2AB2P-AWP02L</p>	<p>Brookstone Dual Smart Plug User Manual - Wi-Fi Smart Home Outlet with Alexa & Google Assistant</p> <p>The Brookstone Dual Smart Plug user manual provides comprehensive instructions for setting up, controlling, and monitoring the Wi-Fi enabled smart plug. Learn about its features, specifications, app integration with Brookstone Smart, and voice control capabilities with Amazon Alexa and Google Assistant. Includes FCC compliance information and warranty details.</p>
 <p>Avatar Mini Smart Plug Instructions</p> <p>WiFi, BLE, Amazon Alexa, Google Assistant, Avatar Controls App</p> <p>service@avatarcontrols.com</p>	<p>Avatar Controls Mini Smart Plug AWP02L-BT: Setup and Usage Guide</p> <p>Comprehensive instructions for setting up and using the Avatar Controls Mini Smart Plug (Model AWP02L-BT) with WiFi, Bluetooth, Amazon Alexa, and Google Assistant. Includes connection methods, parameters, and safety information.</p>
 <p>CONTROLS</p>	<p>JBL Reflect Aero Earbuds: Controls, Features, and Charging Guide</p> <p>A comprehensive guide to the controls, auto play/pause functionality, LED behaviors, charging, and factory reset procedures for JBL Reflect Aero earbuds. Learn how to manage your audio and device settings.</p>
	<p>ENGO EROL-WIFI Wi-Fi Roller Shutter Controller - Quick Guide</p> <p>Quick start guide for the ENGO EROL-WIFI Wi-Fi Roller Shutter controller. Learn about installation, setup, features, technical specifications, and device calibration for smart home automation.</p>
 <p>QUICK START GUIDE</p>	<p>JBL Reflect Mini NC Quick Start Guide: Setup, Features, and Controls</p> <p>Get started quickly with the JBL Reflect Mini NC wireless earbuds. This guide covers unboxing, setup, app integration, wearing instructions, power and connection, controls, charging, LED indicators, and technical specifications.</p>
 <p>TRV603 Wi-Fi Smart Thermostatic Radiator Valve USER MANUAL</p>	<p>TRV603 Wi-Fi Smart Thermostatic Radiator Valve User Manual</p> <p>Comprehensive user manual for the TRV603 Wi-Fi Smart Thermostatic Radiator Valve, detailing installation, operation, features like app control, voice commands, and troubleshooting.</p>

Documents - Avatar Controls – AWP12L



Mini Smart Plug Instructions

service@avatarcontrols.com

[\[pdf\]](#) User Manual Guide

AvatarControls MiniSmartPlug UserManual Energy Monitor Smart Plugs That Work with Alexa Google Home Siri Wireless 2 4G WIFI Outlet w Life Tuya Avatar Controls IFTTT 10A Mini Dual Socket Enchufe Inteligente Timer Pack 1 AWP12L User Guide B09YPYB6GV B0828BH1ZK B07CHGKHZW B07PFSRMV4 C1ea3xp4b8L m media amazon images I |||

...

lang: **score:20** filesize: 4.38 M page_count: 16 document date: 2020-11-06