

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [Jensen](#) /

› [JENSEN JEP-175 Portable Bluetooth Rechargeable Speaker with Built-in Emergency USB Charging Port, FM Radio, Flashlight and Solar Charging Pane User Manual](#)

Jensen JEP-175

JENSEN JEP-175 Portable Bluetooth Rechargeable Speaker User Manual

Model: JEP-175

INTRODUCTION

The JENSEN JEP-175 is a versatile portable Bluetooth rechargeable speaker designed for both entertainment and emergency preparedness. It features Bluetooth 5.0 connectivity, an FM radio, a built-in flashlight, and multiple charging options including a solar panel and USB port. This manual provides detailed instructions for the safe and effective operation of your JEP-175 speaker.

Important Safety Notice:

This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm. Please handle with care and dispose of responsibly.

PRODUCT OVERVIEW

Familiarize yourself with the components and features of your JENSEN JEP-175 speaker.



Figure 1: Front view of the JEP-175

speaker, showing the main speaker grille, control panel, and integrated flashlight.



Figure 2: Side view of the JEP-175, highlighting the integrated solar charging panel.



Figure 3: Detailed view of the JEP-175's control panel, showing the Auxiliary Input Jack, USB Flash Drive Memory Slot, and USB Charging Port.

Key Features:

- Bluetooth 5.0 Streaming (A2DP, AVRCP) with 32-foot transmission distance.
- FM Radio with built-in antenna.
- Auxiliary Input Jack for external audio sources.
- 1 Amp USB Port for charging smartphones and other devices.
- USB Flash Drive Memory Slot for MP3 playback.
- Built-in Flashlight.
- Multi-color LED Accent Lights in speaker.
- 3-Way Power: Solar, USB Charging Port, or Built-in Rechargeable Battery (4800mAh).
- Output: 3.5W RMS.

SETUP

Unpacking and Initial Charge:

1. Carefully remove the JEP-175 speaker and all accessories from the packaging.
2. Verify that all included components are present: JEP-175 speaker, Power Adapter.
3. Before first use, fully charge the built-in rechargeable battery using the provided power adapter. Connect the adapter to the DC 5V input port on the speaker and plug it into a standard wall outlet. The charging indicator light will illuminate.
4. Alternatively, place the speaker with the solar panel facing direct sunlight for solar charging. Ensure the panel is clean and unobstructed for optimal charging efficiency.

Powering On/Off:

Locate the Power ON/OFF switch on the control panel. Slide the switch to the "ON" position to power on the speaker. Slide it to the "OFF" position to power off the speaker.

OPERATING INSTRUCTIONS

Bluetooth Pairing and Playback:

1. Ensure the JEP-175 is powered on.
2. The speaker will automatically enter Bluetooth pairing mode, indicated by a flashing LED light.
3. On your Bluetooth-enabled device (smartphone, tablet, etc.), enable Bluetooth and search for available devices.
4. Select "JEP-175" from the list of devices. Once paired, a confirmation tone will sound, and the LED light will become solid.
5. You can now play audio from your device through the JEP-175 speaker. Use your device's controls for playback (play/pause, skip tracks) and volume adjustment.

FM Radio Operation:

1. Extend the built-in telescopic antenna for optimal reception.
2. Press the "MODE" button to switch to FM Radio mode.
3. Use the tuning buttons (usually labeled with arrows or +/-) to scan for radio stations.
4. Adjust the volume using the volume controls on the speaker.

USB Flash Drive MP3 Playback:

1. Insert a USB flash drive containing MP3 audio files into the USB Flash Drive Memory Slot.
2. The speaker should automatically detect the USB drive and begin playing MP3 files. If not, press the "MODE" button to select USB mode.
3. Use the playback controls on the speaker to navigate tracks (play/pause, next/previous).

Auxiliary Input (AUX-IN):

1. Connect one end of a 3.5mm audio cable (not included) to the Auxiliary Input Jack on the JEP-175.
2. Connect the other end of the cable to the headphone jack or audio output of your external audio device (e.g., MP3

player, non-Bluetooth phone).

3. Press the "MODE" button to switch to AUX mode.
4. Play audio from your external device. Volume can be controlled via both the speaker and the external device.

Using the Flashlight:

The JEP-175 features a built-in flashlight. Locate the flashlight switch (or button) on the speaker and activate it to turn the flashlight on or off. This is useful for illumination during power outages or outdoor activities.

Emergency USB Charging Port:

The 1A USB charging port allows you to charge external devices like smartphones. Connect your device's USB charging cable to the USB port on the JEP-175. Ensure the JEP-175 has sufficient battery charge to power the charging function. This feature is particularly useful in emergency situations or when away from traditional power sources.



Figure 4: The JEP-175's USB port actively charging a smartphone, demonstrating its emergency power bank capability.

Multi-color LED Accent Lights:

The speaker features multi-color LED accent lights that enhance the ambiance. These lights typically activate automatically when the speaker is in use. Refer to the speaker's controls for any specific button to toggle or change light modes, if available.

MAINTENANCE

Cleaning:

To clean the speaker, use a soft, dry cloth. Do not use abrasive cleaners, waxes, or solvents as they may damage the surface. Keep the solar panel clean and free of dust or debris for efficient charging.

Battery Care:

The JEP-175 contains a built-in rechargeable Lithium Ion battery. To prolong battery life:

- Avoid fully discharging the battery frequently.
- Charge the battery regularly, even if the speaker is not in frequent use.
- Store the speaker in a cool, dry place when not in use for extended periods.
- Do not expose the speaker to extreme temperatures.

TROUBLESHOOTING


If you encounter issues with your JEP-175 speaker, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
No power / Speaker does not turn on.	Battery is depleted.	Charge the speaker using the power adapter or solar panel.
No sound from speaker.	Volume is too low; Incorrect mode selected; Device not paired (Bluetooth); Cable not connected (AUX).	Increase volume on both speaker and connected device. Ensure correct mode (Bluetooth, FM, USB, AUX) is selected. Re-pair Bluetooth device. Check AUX cable connection.
Bluetooth device cannot pair.	Speaker not in pairing mode; Device too far; Interference.	Ensure speaker is in Bluetooth pairing mode (flashing LED). Move device closer to speaker. Avoid strong electromagnetic interference.
Poor FM radio reception.	Antenna not extended; Weak signal area.	Fully extend the telescopic antenna. Try repositioning the speaker for better signal.
USB MP3 playback not working.	USB drive not formatted correctly; Corrupt files; USB port issue.	Ensure USB drive is formatted to FAT32. Verify MP3 files are not corrupted. Try a different USB drive. If issues persist, contact customer support.
Smartphone not charging via USB port.	Speaker battery low; Cable issue; Device incompatibility.	Ensure JEP-175 battery is sufficiently charged. Try a different USB charging cable. Some devices may draw too much power or be incompatible.

SPECIFICATIONS

Feature	Detail
Model Number	JEP-175
Product Dimensions	6.5 x 4.5 x 9 inches (16.5 x 11.4 x 22.9 cm)
Item Weight	2.06 pounds (0.93 kg)
Connectivity Technology	Bluetooth 5.0
Transmission Distance	32 feet (10 meters)
Audio Output	3.5W RMS
Battery Type	Built-in Rechargeable Lithium Ion
Battery Capacity	4800mAh
Charging Options	Solar, USB Charging Port, Built-in Rechargeable Battery

Feature	Detail
USB Charging Port Output	1 Amp
Radio Bands Supported	FM
Included Components	Power Adapter

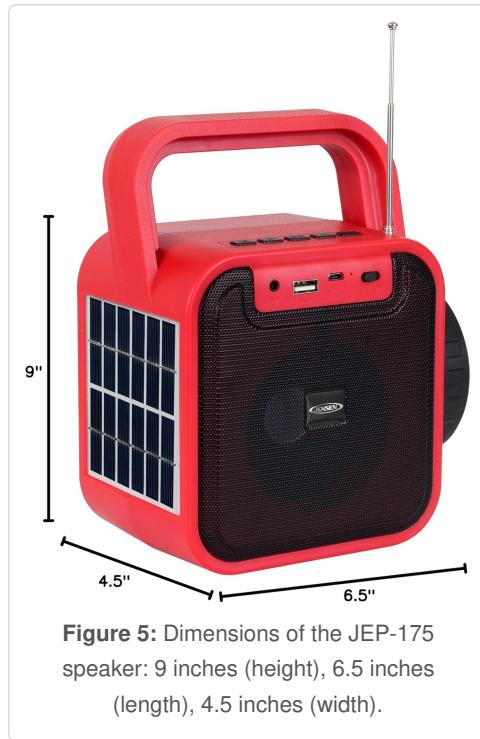

WARRANTY AND SUPPORT



Warranty Information:


This product is covered by a manufacturer's warranty. For specific details regarding warranty coverage, duration, and terms, please refer to the warranty card included with your product or visit the official Jensen website. Please retain your proof of purchase for warranty claims.

Customer Support:

For technical assistance, troubleshooting not covered in this manual, or service inquiries, please contact Jensen customer support. Contact information can typically be found on the product packaging, the official Jensen website, or by searching for "Jensen customer support" online.

You can visit the official Jensen store on Amazon for more information: [Jensen Store](#)

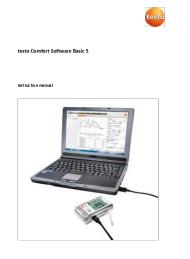	<p>Jensen JEP-650 AM/FM Weather Band Radio User Manual</p> <p>User manual for the Jensen JEP-650 AM/FM Weather Band Radio with Weather Alert, detailing its features, operation, safety instructions, power sources (dynamo, solar, battery, USB), and troubleshooting.</p>
	<p>Jensen JMC-1250 Bluetooth 3-Speed Stereo Turntable System User Manual</p> <p>Comprehensive user manual for the Jensen JMC-1250 Bluetooth 3-Speed Stereo Turntable Music System with Dual Cassette Deck. Learn about setup, operation, features, safety instructions, and troubleshooting.</p>
	<p>Rockwell Automation 194R Operating Handle Installation Instructions</p> <p>Comprehensive installation guide for Rockwell Automation's 194R Series Operating Handles, including models 194R-NHR1, -NHR1M, -NHR2, -NHR2M, -HM4-NFPA1, -HM4-NFPA3, and various NFPA handle types. Provides detailed steps, dimensions, and safety warnings for proper installation.</p>
	<p>Testo 175 Data Loggers: Instruction Manual</p> <p>Comprehensive instruction manual for the Testo 175 series of data loggers, covering operation, technical specifications, and maintenance for temperature and humidity monitoring.</p>
	<p>Greisinger GTH 175 PT Digital Thermometer Operating Manual</p> <p>Operating manual for the Greisinger GTH 175 PT digital thermometer, detailing its intended use, safety instructions, operation, maintenance, specifications, and calibration.</p>
	<p>Testo Comfort Software Basic 5 Instruction Manual</p> <p>This manual provides comprehensive instructions for using the Testo Comfort Software Basic 5, covering installation, configuration, data import, and evaluation of measurement data from Testo data loggers.</p>

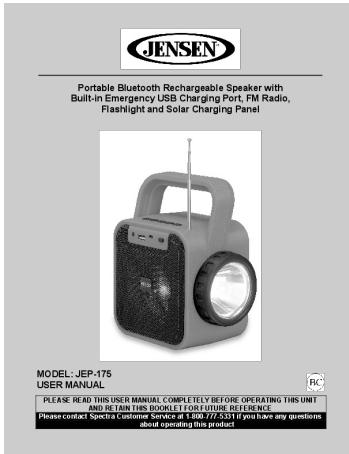


[pdf] User Manual Installation Guide Instructions Accessories

Microsoft Word JEP 175 English UM USA 0522 r3 CWL Download Spectra Merchandising International Inc Jensen EIB spectraintl images stories jn |||

Portable Bluetooth Rechargeable Speaker with Built-in Emergency USB Charging Port, FM Radio, Flashlight and Solar Charging Panel MODEL: **JEP-175** USER MANUAL PLEASE READ THIS USER MANUAL COMPLETELY BEFORE OPERATING THIS UNIT AND RETAIN THIS BOOKLET FOR FUTURE REFERENCE Please contact Spectra Customer ...


lang:en score:27 filesize: 1.3 M page_count: 12 document date: 2022-05-26

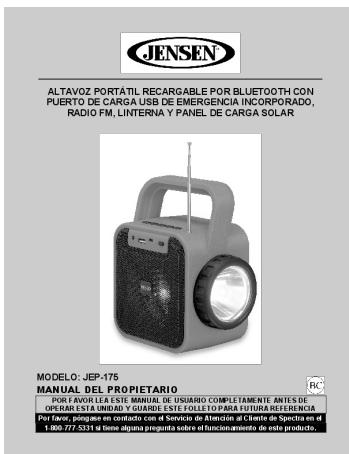

[pdf] User Manual

Microsoft Word JEP 175 Spanish UM USA 0522 r3 CWL Download Spectra Merchandising International Inc Jensen SIB spectraintl images stories jn |||


ALTAZO PORTATIL RECARGABLE POR BLUETOOTH CON PUERTO DE CARGA USB DE EMERGENCIA INCORPORADO, RADIO FM, LINTERNA Y PANEL DE CARGA SOLAR MODELO: **JEP-175** MANUAL DEL PROPIETARIO POR FAVOR LEA ESTE MANUAL DE USUARIO COMPLETAMENTE ANTES DE OPERAR ESTA UNIDAD Y GUARDE ESTE FOLLETO PARA FUTURA REFERENCIA Por...
lang:es score:27 filesize: 1.24 M page_count: 13 document date: 2022-05-26

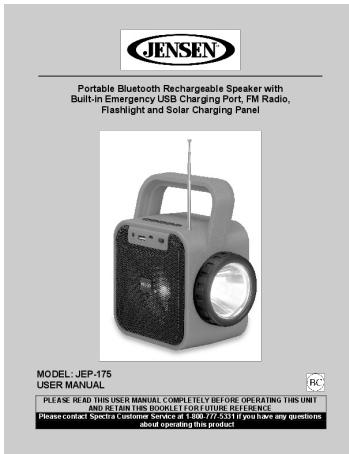

[pdf] User Manual Installation Guide Instructions Accessories

Microsoft Word JEP 175 English UM USA 0522 r3 CWL 3339183 jep eib 7 5 Battery Powered Flashlight Jensen jnsn1042 175Jensen 175secure img1 ag wfcdn dm document ec526276 9482 42f8 8967 bcae0e29adec |||


Portable Bluetooth Rechargeable Speaker with Built-in Emergency USB Charging Port, FM Radio, Flashlight and Solar Charging Panel MODEL: **JEP-175** USER MANUAL PLEASE READ THIS USER MANUAL COMPLETELY BEFORE OPERATING THIS UNIT AND RETAIN THIS BOOKLET FOR FUTURE REFERENCE Please contact Spectra Customer ...
lang:en score:25 filesize: 1.3 M page_count: 12 document date: 2023-03-23

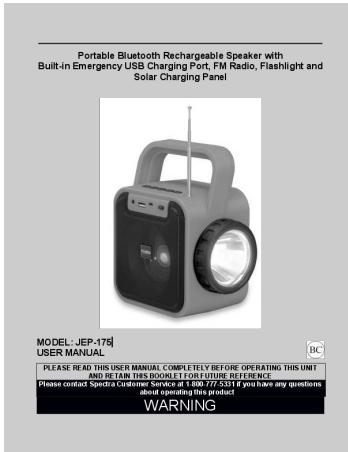

[\[pdf\]](#) User Manual Installation Guide Instructions Accessories

CLEMENT User Manual Shenzhen Oceantech Electronics Co Ltd 75200 2A6QJ 2A6QJ75200
Portable Bluetooth Rechargeable Speaker with Built-in Emergency USB Charging Port, FM Radio, Flashlight and Solar Charging Panel MODEL: **JEP-175** USER MANUAL PLEASE READ THIS USER MANUAL COMPLETELY BEFORE OPERATING THIS UNIT AND RETAIN THIS BOOKLET FOR FUTURE REFERENCE Please contact Spectra Customer ...


lang:en **score:23** filesize: 1.18 M page_count: 12 document date: 2022-05-26

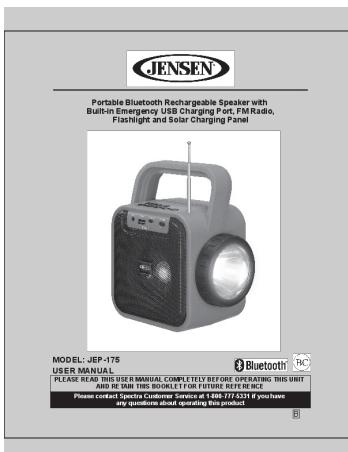

[\[pdf\]](#) User Manual Installation Guide Instructions


2 LINK CWL Download Spectra Merchandising International Inc Jensen JEP 175B EIB spectraintl images stories jn UM |||
Portable Bluetooth Rechargeable Speaker with Built-in Emergency USB Charging Port, FM Radio, Flashlight and Solar Charging Panel MODEL: **JEP-175** USER MANUAL PLEASE READ THIS USER MANUAL COMPLETELY BEFORE OPERATING THIS UNIT AND RETAIN THIS BOOKLET FOR FUTURE REFERENCE Please contact Spectra Customer ...

lang:en **score:18** filesize: 1.21 M page_count: 13 document date: 2024-06-12

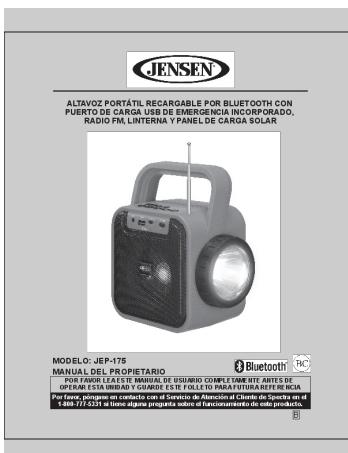


[\[pdf\]](#) User Manual

2 LINK CWL Download Spectra Merchandising International Inc Jensen JEP 175B SIB spectraintl images stories jn UM |||
ALTAVOZ PORTATIL RECARGABLE POR BLUETOOTH CON PUERTO DE CARGA USB DE EMERGENCIA INCORPORADO, RADIO FM, LINTERNA Y PANEL DE CARGA SOLAR MODELO: **JEP-175** MANUAL DEL PROPIETARIO POR FAVOR LEA ESTE MANUAL DE USUARIO COMPLETAMENTE ANTES DE OPERAR ESTA UNIDAD Y GUARDE ESTE FOLLETO PARA FUTURA REFERENCIA Por...
lang:es **score:17** filesize: 1.29 M page_count: 14 document date: 2024-06-12

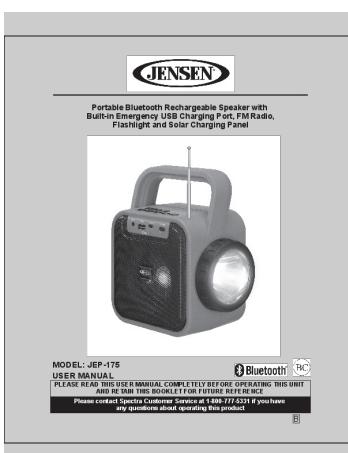

[\[pdf\]](#) User Manual Installation Guide Instructions

2 LINK CWL Download Spectra Merchandising International Inc Jensen JEP 175B EIB spectraintl images stories jn UM JEP EIB |||
Portable Bluetooth Rechargeable Speaker with Built-in Emergency USB Charging Port, FM Radio, Flashlight and Solar Charging Panel MODEL: **JEP-175** USER MANUAL PLEASE READ THIS USER MANUAL COMPLETELY BEFORE OPERATING THIS UNIT AND RETAIN THIS BOOKLET FOR FUTURE REFERENCE Please contact Spectra Customer ...
lang:en **score:14** filesize: 1.21 M page_count: 13 document date: 2024-06-12

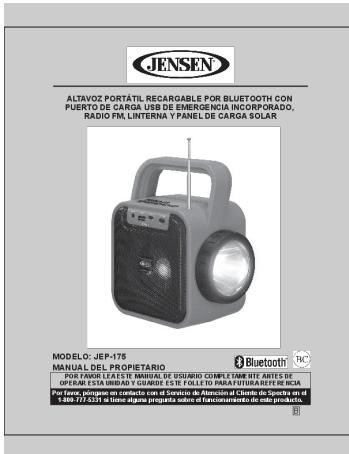

[pdf] User Manual

2 LINK CWL DownloadSpectra Merchandising International Inc JensenJEP 175B SIBspectraintl images stories in UM JEP SIB |||

ALTAZO PORTTIL RECARGABLE POR BLUETOOTH CON PUERTO DE CARGA USB DE EMERGENCIA INCORPORADO, RADIO FM, LINTERNA Y PANEL DE CARGA SOLAR MODELO: JEP-175 MANUAL DEL PROPIETARIO POR FAVOR LEA ESTE MANUAL DE USUARIO COMPLETAMENTE ANTES DE OPERAR ESTA UNIDAD Y GUARDE ESTE FOLLETO PARA FUTURA REFERENCIA Por...

lang:es score:13 filesize: 1.29 M page count: 14 document date: 2024-06-12



[\[pdf\]](#) Specifications

Specifications 7 5 Battery Powered Flashlight Jensen jsnsn1042 JEP 175Jensen 175jep 175secure img1
aq wfcdn dm document 1e91f4d0 5cbc 4761 97d7 3cd64fe9c18d iep 175 III

■ ■

lang:es score:13 filesize: 1.04 M page_count: 1 document date: 2023-08-02



[\[pdf\] Catalog](#)

Sell Spec Sheet JENSEN Portable Rechargeable Bluetooth® Speaker with FM Radio Flashlight Solar Panel and USB Port Red JEP 175 Catalog 92440a625a1fb2a3fa6b6bfa50389d0876af65a5 spec 1 JEN JEP175 order petra attachment 6461791 6464f1d296aeef356193058 III

lang:es score:12 filesize: 1.04 M page_count: 1 document date: 2023-04-06