

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

› [SAFUEL](#) /

› [SAFUEL Magnetic Portable Charger User Manual](#)

SAFUEL SA-130

SAFUEL Magnetic Portable Charger User Manual

MODEL: SA-130

Introduction

Thank you for choosing the SAFUEL 10000mAh Magnetic Wireless Power Bank. This portable charger is designed to provide convenient and fast charging for your compatible devices, especially the iPhone 12, 13, 14, and 15 series with MagSafe functionality. This manual provides essential information on how to set up, operate, and maintain your power bank to ensure optimal performance and longevity.

What's Included

- SAFUEL 10500mAh Magnetic Wireless Portable Charger x1
- USB-C to USB-C Cable x1
- Travel Pouch x1
- User Manual x1

Product Features

- **Magnetic Charging:** Built-in 1500Gs strong magnets for firm attachment and wireless charging of iPhone 12/13/14/15 series.
- **High Capacity:** 10,000mAh battery provides approximately 1.6 wireless charges for an iPhone 13, offering up to 40 hours of video playback.
- **Fast Wired Charging:** Supports PD 20W power delivery via the USB-C port, charging compatible iPhones up to 3.5X faster than original 5W chargers.
- **Dual Output Ports:** Features both USB-C (input/output) and USB-A (output) ports for versatile wired charging.
- **Paw Print LED Indicator:** Unique paw print design lights up to show the remaining battery level (each segment represents 20% charge).
- **Safety Features:** Incorporates a 15-layer SmartProtect System for safe charging, monitoring temperature 3,200,000 times per day.

Setup

Initial Charging of the Power Bank

Before first use, fully charge your SAFUEL Magnetic Portable Charger. Connect the provided USB-C cable to the power bank's USB-C port and the other end to a compatible USB-C wall adapter (not included). The paw print LED indicator will light up and blink, showing the charging progress. Once all segments of the paw print are solid blue, the power bank is fully charged.

Each segment of the paw print represents approximately 20% of the battery capacity. For example, if three segments are lit, the power bank has about 60% charge remaining.



Image: SAFUEL power bank with its unique paw print LED indicator displaying charge level.

Operating Instructions

Wireless Magnetic Charging (for iPhone 12/13/14/15 Series)

1. Ensure your power bank is sufficiently charged. Press the power button on the side to activate the paw print LED indicator.
2. Align the magnetic charging area on the back of the power bank with the MagSafe area on your compatible iPhone. The strong magnets will snap the power bank securely into place.

3. Your iPhone will display a charging animation, indicating that wireless charging has begun. The power print LED indicator on the power bank will remain lit during charging.

Note: For optimal magnetic attachment and charging efficiency, use an iPhone 12/13/14/15 series phone directly or with a MagSafe compatible case. Non-MagSafe cases may hinder magnetic connection and wireless charging performance.



Image: The power bank magnetically attaching to an iPhone, illustrating the strong magnetic connection.

Charge Through MagSafe Cases

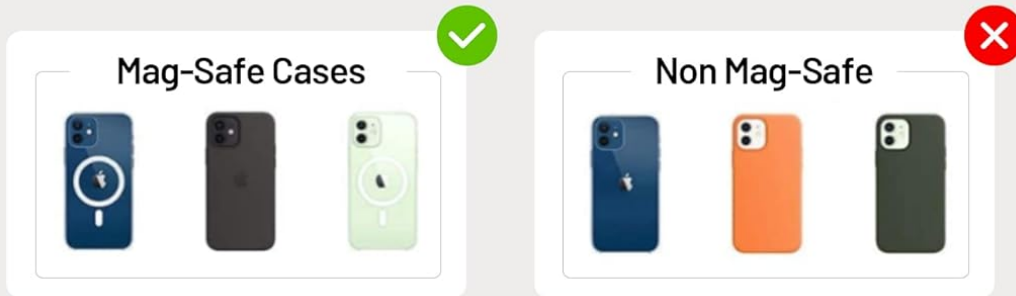


Image: The power bank demonstrating compatibility with MagSafe cases for seamless charging.

Video: Demonstration of the SAFUEL 10000mAh 20W PD USB-C MagSafe Wireless Charger in action, highlighting its magnetic attachment and charging capabilities.

Video: An overview of the SAFUEL Magnetic Portable Charger, detailing its features and how to use them for efficient charging.

Wired Charging (USB-C & USB-A)

1. Connect your device's charging cable to either the USB-C port (for PD 20W fast charging) or the USB-A port on the power bank.
2. Connect the other end of the cable to your device. The power bank will automatically begin charging your device.
3. The paw print LED indicator will light up to show that the power bank is actively charging a device. To

stop charging, simply disconnect the cable from your device or the power bank.

PD 20W Fast Wired Charging



30
mins




Image: The power bank connected via USB-C cable to an iPhone, illustrating its PD 20W wired fast charging capability.

Maintenance

- Store the power bank in a cool, dry place away from direct sunlight and extreme temperatures.
- Avoid dropping or subjecting the power bank to strong impacts.
- Clean the surface with a soft, dry cloth. Do not use harsh chemicals or abrasive materials.
- Do not attempt to disassemble or repair the power bank yourself. Contact customer support for assistance.

Troubleshooting

- **Power bank not charging:** Ensure the USB-C cable is securely connected to both the power bank and the wall adapter. Try a different cable or adapter.
- **Device not charging wirelessly:** Ensure your iPhone is compatible with MagSafe. Check that the power bank is turned on and properly aligned with your iPhone's MagSafe area. Remove any non-MagSafe cases that might interfere with the magnetic connection.
- **Slow charging:** For wired charging, ensure you are using a PD 20W compatible wall adapter and cable for fast charging. For wireless charging, ensure proper alignment and that no foreign objects are between the power bank and your phone.
- **Overheating:** It is normal for the power bank to become slightly warm during charging. If it becomes excessively hot, disconnect it immediately and contact customer support.

Specifications

Feature	Detail
Model Number	SA-130
Battery Capacity	10000 Milliamp Hours
Product Dimensions	3.82 x 2.72 x 0.87 inches
Item Weight	9.6 ounces
Connector Type	USB Type C
Special Features	Auto Shut-Off, LED Indicator Lights, Fast Charging, Pocket Size, Wireless Charging

Warranty & Support

The SAFUEL Magnetic Portable Charger comes with a 3-Year Industry-Leading Warranty, ensuring peace of mind and reliable performance.

For technical support or any inquiries, please contact us at: support@safuel.com

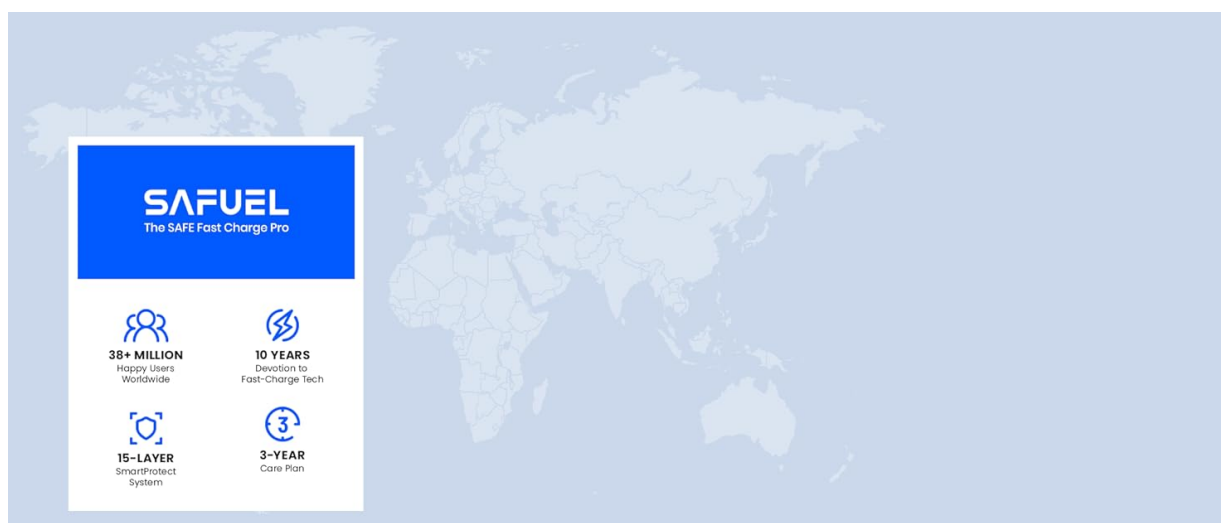


Image: SAFUEL brand overview highlighting its commitment to fast-charge technology, extensive user base, advanced protection system, and warranty.

