

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

- › [XREXS](#) /
- › [XREXS Large Digital Wall Clock Instruction Manual](#)

XREXS Purple LED Display (B09XMHVCJJ)

XREXS Large Digital Wall Clock Instruction Manual

MODEL: PURPLE LED DISPLAY (B09XMHVCJJ)

Introduction

This manual provides comprehensive instructions for the setup, operation, and maintenance of your XREXS Large Digital Wall Clock. Please read this manual thoroughly before use to ensure proper functionality and longevity of the device. This clock is designed for clear visibility and versatile use in various indoor environments.

What's in the Box

- XREXS Large Digital Wall Clock Unit
- Remote Control
- Power Adapter
- User Manual
- Mounting Template
- 2 x AAA Batteries (for memory backup and remote control)

Setup

1. Power Connection

Connect the provided power adapter to the clock's power input port and plug it into a standard electrical outlet. The clock operates primarily on AC power. The display will illuminate upon successful connection.

Plug-in Large Digital Wall Clock



Run on electricity only &
Backup battery for memory




The clock requires continuous power from the adapter for operation. The internal batteries serve only as a backup for memory retention during power outages.

2. Battery Installation

Install the 2 AAA batteries into the battery compartment located on the back of the clock. These batteries provide memory backup for time and settings in case of a power interruption. Ensure the plastic wrap is removed from the batteries before installation.

Wall Clock & Desk Clock

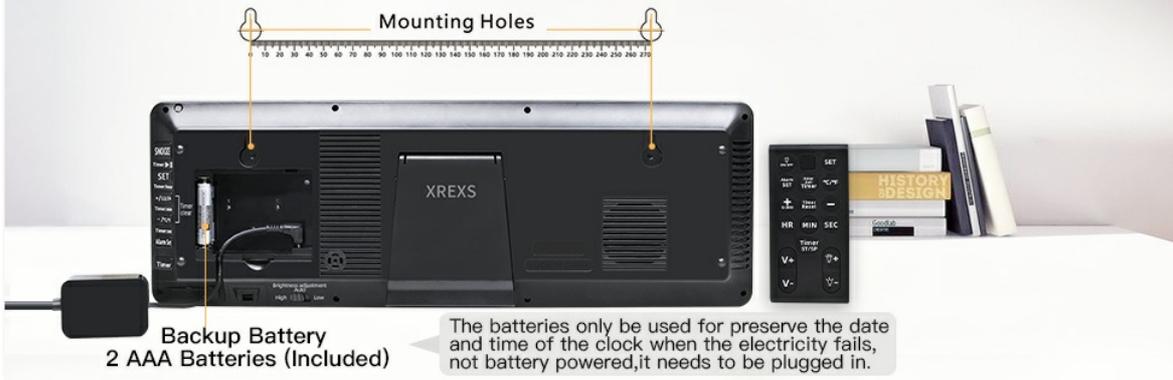

The back of the clock with the battery compartment open, showing the two AAA batteries for backup.

3. Initial Screen Preparation

Carefully peel off any protective film from the clock's display screen before first use to ensure optimal clarity.

Operating Instructions

1. Time and Date Setting

Use the remote control for convenient setting. Press the **SET** button to enter setting mode. Use the directional buttons (up/down) to adjust values and **SET** again to confirm and move to the next setting (Year, Month, Day, Hour, Minute).



The remote control provides full functionality for setting the clock's various features.

2. 12/24 Hour Format

Press the **+/-12/24HR** button on the remote control to toggle between 12-hour (with AM/PM indicator) and 24-hour time formats.



The clock supports both 12-hour and 24-hour time displays.

3. Celsius/Fahrenheit Temperature Display

Press the **°C/°F** button on the remote control to switch the temperature display between Celsius and Fahrenheit.

4. Brightness Adjustment

The clock features a 4-level adjustable display brightness. You can manually adjust the brightness using the brightness adjustment buttons on the remote control. Additionally, there is an auto-dimming feature that adjusts brightness based on ambient light. A switch on the back of the clock allows you to select High, Low, or Auto brightness modes.

Choose from four brightness levels or enable auto-dimming for optimal viewing.

5. Timer Function (Count Up/Down)

The clock includes a versatile timer function. Press the **Enter/Exit Timer** button on the remote to activate the timer mode. Use the **HR**, **MIN**, and **SEC** buttons to set your desired countdown time (0-29 hours, 59 minutes, 59 seconds). Press **Timer ST/SP** to start or stop the timer. A 90-second 'DIDI' ringing will sound when the countdown ends. The timer has a memory function, retaining the last setting if not turned off. It can also count up from zero.

Stopwatch & Countdown Timer



Three Modes Multifunction Clock



Timer



Clock



Alarm Clock

The clock offers a stopwatch and countdown timer, useful for various activities.

6. Alarm Function

Set an alarm by pressing the **Alarm Set** button on the remote. Adjust the alarm time using the directional buttons. You can choose to have the alarm active every day, on working days (Monday-Friday), or on weekends. Toggle the alarm on or off as needed.

Configure your alarm for specific days or daily repetition.

7. Hourly Chime

The clock offers an hourly chime feature. To activate or deactivate, press and hold the **Alarm Set** button. You can select different chime modes: no chime, hourly chime, or chime only between 6 AM and 9 PM. The volume of the chime can also be adjusted.

8. Display On/Off

Press the **ON/OFF** button on the remote control to turn the display on or off completely, which is useful for bedrooms or when you do not wish to see the time.

Mounting & Placement

The XREXS Digital Wall Clock offers flexible placement options:

- **Wall Mounting:** The clock features two keyholes on the back for easy wall mounting. Use the provided mounting template to mark the correct positions for screws on your wall.
- **Desk/Table Placement:** A fold-out backstand allows the clock to be placed securely on a tabletop, desk, or shelf.

Mounting On The Wall



Stand On The Table / Desk



The clock can be easily mounted on a wall or placed on a flat surface using its integrated stand.

Maintenance

- Clean the clock's display and body with a soft, dry cloth.
- Avoid using abrasive cleaners or harsh chemicals, as they may damage the surface.
- Ensure the clock is placed in a well-ventilated area to prevent overheating.

Troubleshooting

Problem	Possible Cause / Solution
---------	---------------------------

Problem	Possible Cause / Solution
Clock turns off by itself	Check if the power adapter is securely plugged into both the clock and the wall outlet. Ensure there are no power interruptions.
Display is dim or not visible	Adjust brightness settings using the remote control or the switch on the back (High/Low/Auto). Ensure the display is not turned off via the remote.
Remote control not responding	Check the batteries in the remote control. Ensure any protective plastic film has been removed from new batteries. Point the remote directly at the clock.
Alarm sound is too low	Adjust the volume setting for the alarm via the remote control.
Time/Date incorrect after power outage	Ensure backup batteries are installed and fresh. The clock should retain settings with functional backup batteries.

Specifications

- **Brand:** XREXS
- **Model:** Purple LED Display (B09XMHVCJJ)
- **Display Type:** Digital
- **Product Dimensions:** 16.5"W x 5.7"H
- **Power Source:** Corded Electric
- **Indoor/Outdoor Usage:** Indoor
- **Special Features:** Adjustable Brightness, Alarm, Illuminated, Large Display, Snooze, Count Up/Down Timer, Day/Date/Temperature Display
- **Frame Material:** Acrylonitrile Butadiene Styrene
- **Batteries:** 2 x AAA (included for backup)
- **Mounting Type:** Wall Mount
- **Item Weight:** 16 ounces (1 pound)

© 2025 XREXS. All rights reserved.

For further support, please visit the [XREXS Store on Amazon](#).