**Saved from manuals.plus.**
**Open the live page for links to other documents and user manuals.**



## WINGBO SYCF6003

# WINGBO 60" DC Ceiling Fan User Manual

Model: SYCF6003 | Brand: WINGBO

## 1. Introduction

Thank you for choosing the WINGBO 60" DC Ceiling Fan. This modern and sleek ceiling fan is designed to provide optimal air circulation and integrated lighting for your living spaces. Featuring an energy-efficient DC motor, 8 durable plywood blades, and a versatile LED light kit, this fan offers both comfort and style. Please read this manual thoroughly before installation and operation to ensure safe and efficient use of your new ceiling fan.





Figure 1.1: WINGBO 60" DC Ceiling Fan with remote control.

## 2. Safety Information

**WARNING: To reduce the risk of fire, electric shock, or personal injury, always turn off power at the main circuit breaker or fuse box before beginning installation.**

- Ensure all electrical connections comply with local codes and ordinances, and with the National Electrical Code (NEC).
- Consult a qualified electrician if you are unfamiliar with electrical wiring.
- The fan must be mounted with a minimum of 7 feet (2.1 meters) clearance from the trailing edge of the blades to the floor.
- Do not operate the fan with damaged power cords or plugs.
- Always insert an alkaline battery (23A 12V x 1 pcs, not included) into the remote control before use.

## 3. Package Contents

Verify that all components are present and undamaged before proceeding with installation:

- Ceiling Fan Motor Housing
- 8 Plywood Blades
- Integrated LED Light Kit
- Remote Control with Wall Holder
- Downrods (4.5" and 12" long)
- Mounting Bracket
- Hardware Pack (screws, washers, wire nuts, etc.)
- Instruction Manual

## 4. Specifications

| Feature | Detail |
|---|---|
| Brand | WINGBO |
| Model Name | WINGBO (SYCF6003) |
| Color | Gold and Black |
| Electric Fan Design | Ceiling Fan |
| Power Source | DC |

| Feature | Detail |
|---|---|
| Style | Modern |
| Product Dimensions | 60"D x 60"W x 33"H |
| Room Type | Bedroom, Living Room, Kitchen, Covered Outdoor |
| Special Feature | LED Light |
| Recommended Uses | Indoor |
| Wattage | 24 watts (LED Light) |
| Finish Type | Brushed |
| Number of Blades | 8 |
| Blade Length | 60 Inches |
| Voltage | 110 Volts (DC) |
| Switch Type | Remote |
| Item Weight | 20.9 Pounds |
| Blade Material | Engineered Wood |
| Number of Power Levels | 6 |
| Specification Met | ETL |


## 5. Setup and Installation

Professional installation is recommended. Ensure power is OFF at the circuit breaker before starting.

1. **Mounting Bracket Installation:** Secure the mounting bracket to the ceiling junction box. Ensure the junction box is adequately supported for the fan's weight.
2. **Downrod Assembly:** Choose the appropriate downrod (4.5" or 12") based on your ceiling height. Feed the electrical wires through the downrod and secure it to the fan motor housing.
3. **Wiring:** Connect the fan's electrical wires to the household supply wires according to the wiring diagram provided in the full manual. Use appropriate wire nuts.
4. **Attaching Fan to Mounting Bracket:** Carefully lift the fan assembly and hang it on the mounting bracket. Secure the fan to the bracket using the provided screws.
5. **Blade Installation:** Attach each of the 8 plywood blades to the fan motor housing using the provided screws. Ensure they are securely fastened.
6. **Light Kit Installation:** Connect the integrated LED light kit wires and secure the light kit to the bottom of the fan motor housing.

# Dimension

4.5" and 12" down rod included

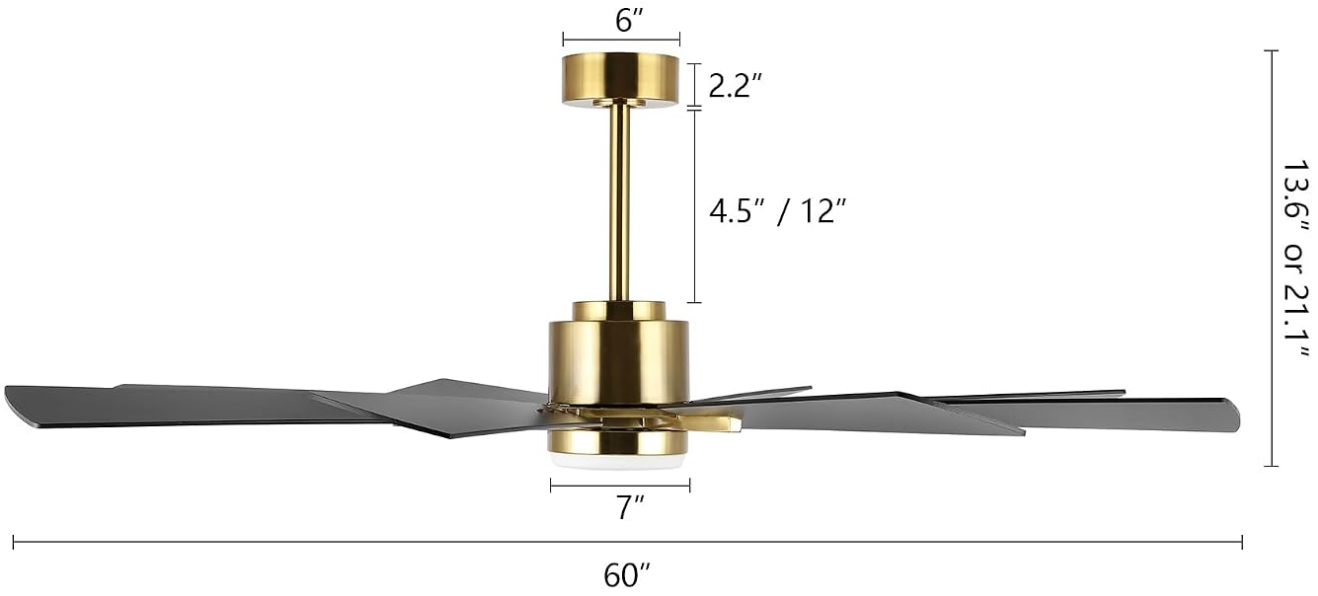


## MOUNTING OPTIONS









**Ideal for room**

20′x20′ or Larger

Figure 5.1: Fan dimensions and available downrod lengths (4.5" and 12").




Figure 5.2: Examples of fan placement in various indoor and covered outdoor settings.

## 6. Operating Instructions

Your WINGBO ceiling fan is controlled by the included remote. Ensure the remote has a fresh 23A 12V battery installed.

### 6.1 Remote Control Functions




Figure 6.1: Remote control layout and functions.

- **Power Button:** Turns the fan ON/OFF.
- **Fan Speed Control (1-6):** Adjusts fan speed from 1 (lowest) to 6 (highest).
- **Light Control Button:** Turns the LED light ON/OFF.
- **Color Temperature Adjustment:** Cycles through 3000K (Warm White), 4500K (Natural White), and 6000K (Day White).
- **Reverse Function:** Changes the direction of blade rotation for seasonal use.
- **Timing Function:** Sets a timer for the fan to turn off automatically.

## 6.2 Reversible DC Motor for Seasonal Use

The fan features a reversible DC motor, allowing you to optimize air circulation for different seasons:

- **Summer Mode (Forward Direction):** Blades rotate counter-clockwise, forcing air downwards to create a cooling breeze.
- **Winter Mode (Reverse Direction):** Blades rotate clockwise, gently drawing air upwards to circulate warm air trapped

near the ceiling.




Figure 6.2: Summer and Winter operating modes.

### 6.3 LED Light Color Temperatures

The integrated LED light offers three color temperature options to suit your preference and room ambiance:

- **Warm White (3000K):** Provides a cozy and inviting glow.
- **Natural White (4500K):** Offers a balanced and neutral light, ideal for daily activities.
- **Day White (6000K):** A bright, crisp light suitable for task lighting or a vibrant atmosphere.






Figure 6.3: Available LED light color temperatures.

## 7. Maintenance

Regular maintenance ensures the longevity and optimal performance of your ceiling fan.

- **Cleaning:** To avoid damage to the finish, clean the fan with a soft, damp cloth. Do not use abrasive cleaners or solvents.
- **Blade Care:** Periodically check the blade screws for tightness. Loose blades can cause wobbling and noise.
- **Light Kit:** The integrated LED light source is designed for long life and typically does not require replacement. If issues arise, contact customer support.
- **Dusting:** Dust the fan blades and motor housing regularly to prevent dust buildup, which can affect performance and appearance.

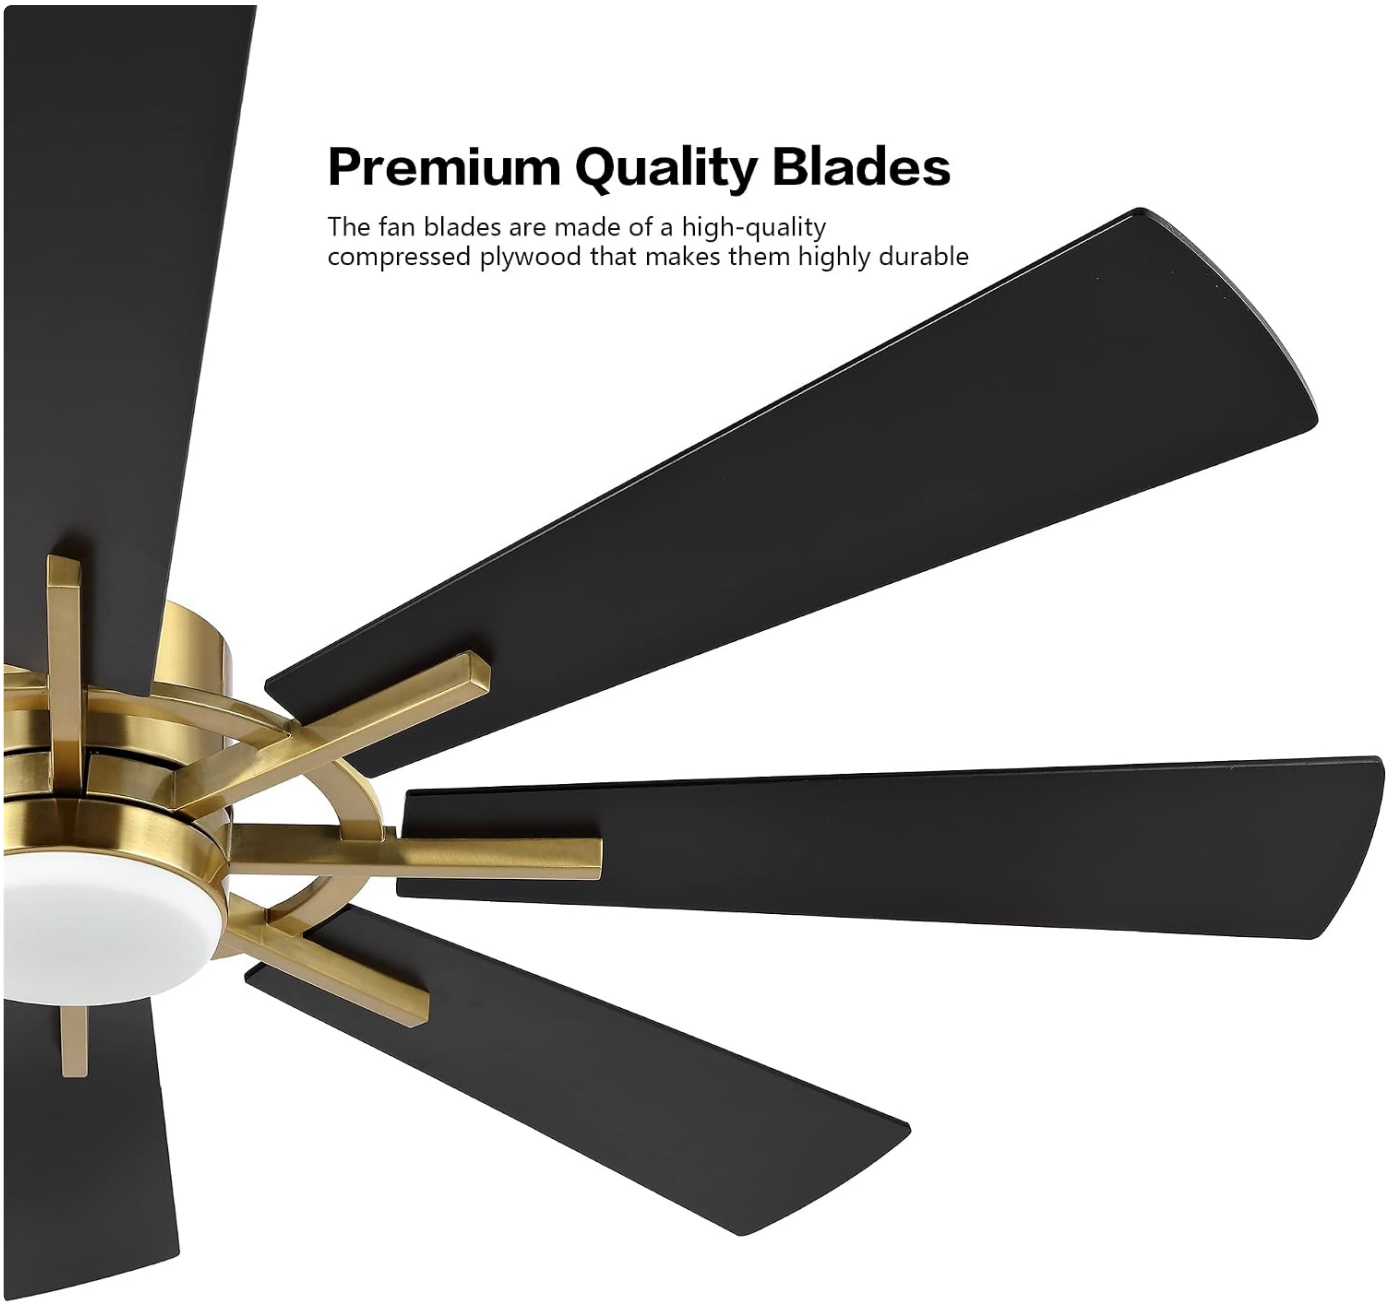



Figure 7.1: Premium quality plywood blades designed for durability.

## 8. Troubleshooting

Before attempting any repairs, ensure the power supply to the fan is disconnected at the circuit breaker.

| Problem | Possible Cause | Solution |
|---|---|---|
| Fan will not start | No power to fan; Loose wire connections; Remote control battery low/dead. | Check circuit breaker/fuses; Verify all wire connections are secure; Replace remote control battery (23A 12V). |
| Fan makes noise | Loose fan blade screws; Loose mounting screws; Fan not properly balanced. | Tighten all blade screws; Tighten mounting screws; Use a balancing kit (not included) if necessary. |

| Problem | Possible Cause | Solution |
|---|---|---|
| Fan wobbles | Loose blades; Improperly installed downrod; Unbalanced blades. | Ensure all blade screws are tight; Re-check downrod installation; Balance blades using a balancing kit. |
| Light not working | Loose wire connection to light kit; Faulty LED driver. | Check light kit wiring; Contact customer support for LED driver issues. |
| Remote not working | Battery dead/incorrectly installed; Remote not paired with fan. | Replace battery (23A 12V); Refer to pairing instructions in the full manual (if applicable). |

## 9. Warranty and Support

For warranty information and customer support, please refer to the warranty card included with your product or visit the official WINGBO website. Keep your purchase receipt as proof of purchase for any warranty claims.
**WINGBO Customer Service:** For technical assistance or replacement parts, please contact WINGBO customer service through their official channels. You can often find contact information on the product packaging or the brand's website.
*Note: Specific warranty terms and conditions may vary.*


### Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

**Name**

Anonymous

**Email**

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

**Question**

Example: How do I reset this device or fix this error?

**Details**

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

**Open the live page**

**https://manuals.plus/asin/B09Y55ZYQZ**

More documents and user manuals: **https://manuals.plus/**