

BESTISAN SR01

BESTISAN SR01 Bookshelf Speaker User Manual

Model: SR01 | Brand: BESTISAN

INTRODUCTION


Thank you for purchasing the BESTISAN SR01 Bookshelf Speaker. This manual provides essential information for setting up, operating, and maintaining your new speakers. Please read these instructions carefully before use to ensure optimal performance and safety.

PACKAGE CONTENTS


Verify that all items listed below are included in your package:

- BESTISAN SR01 Bookshelf Speakers (2 units)
- Remote Control
- RCA to RCA Audio Cable (2.5M / 8.2ft)
- RCA to RCA Audio Cable (1.5M / 5ft)
- Fiber Optic Input Cable (1.8M / 5.9ft)
- Power Adapter
- User Manual


Package Contents

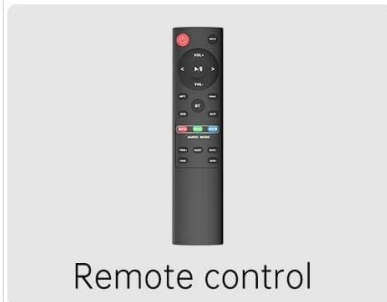


Remote control

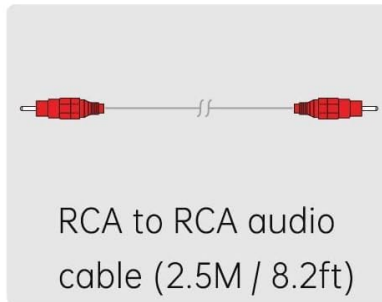


RCA to RCA audio cable (2.5M / 8.2ft)

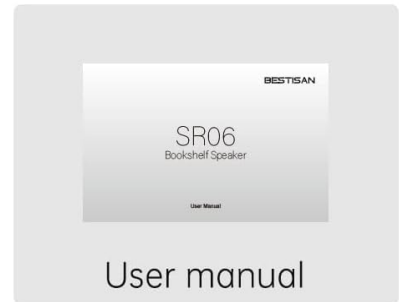


User manual

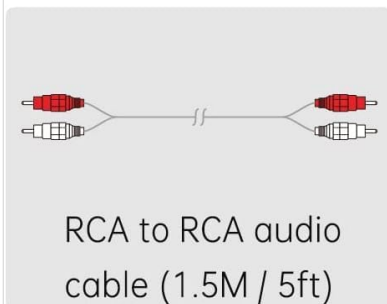

RCA to RCA audio cable (1.5M / 5ft)

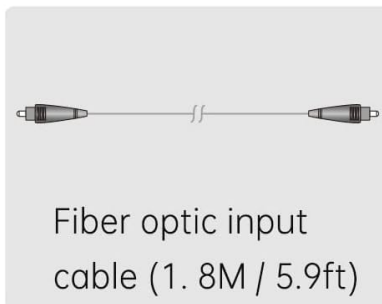

Fiber optic input cable (1.8M / 5.9ft)

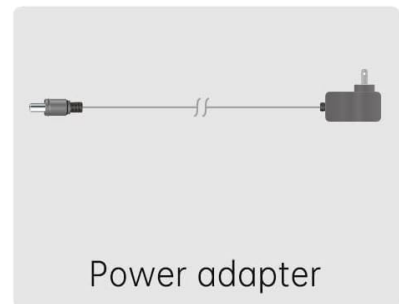

Power adapter

Image: The package contents for the SR01 speakers, showing the two speakers, remote, power adapter, and various connection cables.

PRODUCT OVERVIEW

Rear Panel Controls and Ports



Image: A detailed view of the rear panel of the active speaker, showing the input ports and control knobs.

1. **Power Button:** Press to turn the speakers on or off.
2. **Input Selector:** Press to cycle through input sources (Bluetooth, Optical, RCA, USB).
3. **EQ Button:** Press to switch between sound modes (Movie, Music, Dialogue).
4. **Volume Knob:** Rotate to adjust the master volume.
5. **RCA IN (L/R):** Connect to devices using RCA audio cables.
6. **OPT (Optical) IN:** Connect to devices using an optical fiber cable.
7. **SPK OUT:** Connects to the passive speaker.
8. **DC IN:** Connect the power adapter here.

Remote Control

The included remote control allows convenient operation of the speakers from a distance. It provides access to power, volume, input selection, and sound modes.

SETUP

1. **Placement:** Place the active speaker (with controls) and the passive speaker on a stable, flat surface,

such as a desk or bookshelf. Ensure adequate space around the speakers for optimal sound dispersion.

2. **Connect Speakers:** Connect the active speaker to the passive speaker using the provided speaker cable. Insert one end into the 'SPK OUT' port on the active speaker and the other end into the corresponding port on the passive speaker.
3. **Connect Power:** Insert the DC plug of the power adapter into the 'DC IN' port on the active speaker. Plug the power adapter into a wall outlet.
4. **Connect Audio Source:** Choose your desired audio input method (Bluetooth, Optical, RCA, or USB) and connect your device accordingly.



Image: The SR01 speakers set up on a desk, positioned on either side of a computer monitor.

OPERATING INSTRUCTIONS

Power On/Off

Press the Power button on the rear panel or the remote control to turn the speakers on or off.

Input Selection

Press the Input Selector button on the rear panel or the remote control to cycle through available input sources: Bluetooth, Optical, RCA, and USB.

Bluetooth Pairing

1. Turn on the speakers and select Bluetooth input mode. The indicator light will flash, indicating pairing mode.
2. On your device (smartphone, tablet, etc.), enable Bluetooth and search for available devices.
3. Select "BESTISAN SR01" from the list. Once connected, the indicator light will stop flashing.
4. If prompted for a password, enter "0000".



Image: The SR01 speaker on a desk with a monitor, highlighting its Bluetooth connectivity feature.

Sound Modes (EQ)

The SR01 speakers offer three distinct sound modes to optimize your listening experience:

- **Movie Mode:** Enhances bass and surround effects for an immersive cinematic experience, also suitable for gaming.
- **Music Mode:** Provides balanced highs and lows for clear and expansive music playback.
- **Dialogue Mode:** Optimizes voice clarity, making news and TV programs easier to understand by balancing ambient sound and speech.

Press the EQ button on the rear panel or the remote control to cycle through these modes.



Image: Visual representation of the three sound modes: Music, Movie, and Dialogue, available on the SR01 speakers.

Volume Control

Rotate the Volume knob on the rear panel or use the volume buttons on the remote control to adjust the sound level.

CONNECTIONS

The SR01 speakers support multiple input options for versatile connectivity:

- **Optical Input:** Connect to devices like TVs, game consoles, or DVD players using the provided optical fiber cable for high-quality digital audio.
- **RCA Input:** Use the RCA to RCA cable to connect to devices with RCA audio outputs, such as record players or older audio equipment. A 3.5mm to RCA cable is also included for connecting smartphones or computers with a 3.5mm audio jack.
- **USB Playback:** Connect a USB drive to the USB port for direct audio playback.
- **Bluetooth 5.0:** Wirelessly connect to Bluetooth-enabled devices like smartphones, tablets, and computers.

MAINTENANCE

- **Cleaning:** Use a soft, dry cloth to clean the speaker surfaces. Do not use liquid cleaners or abrasive materials.
- **Ventilation:** Ensure the speakers have adequate ventilation and are not covered, to prevent overheating.
- **Storage:** When not in use for extended periods, store the speakers in a cool, dry place away from direct sunlight and extreme temperatures.
- **Power:** Disconnect the power adapter from the wall outlet during lightning storms or when unused for long periods.

TROUBLESHOOTING

Problem	Possible Cause	Solution
No power	Power adapter not connected or outlet not active.	Ensure the power adapter is securely connected to the speaker and a working power outlet.

Problem	Possible Cause	Solution
No sound	Incorrect input selected, volume too low, or audio cable not connected.	Select the correct input source. Increase volume. Check all audio cable connections.
Bluetooth not pairing	Speakers not in pairing mode, or device too far.	Ensure speakers are in Bluetooth mode and indicator is flashing. Move device closer. Try re-pairing.
Sound distortion	Volume too high, or poor audio source quality.	Reduce volume. Check audio source quality. Ensure cables are not damaged.

SPECIFICATIONS

Feature	Specification
Model	SR01
Brand	BESTISAN (Manufacturer: BESTISAN, Brand Name: TYESQII)
Speaker Type	Bookshelf Speaker System
Speaker Channel Configuration	2.0
Max Output Power	60 Watts
Connectivity Technology	Bluetooth 5.0, USB, Optical, RCA
Woofer/Full-range Driver Diameter	4 inches
Tweeter Driver Diameter	1 inch
Impedance	80 Ohms
Power Type	DC
Control Method	Remote Control
Color	White
Item Dimensions (D x W x H)	13 x 13 x 18 cm
Item Weight	1620 grams
Compatible Devices	DVD player, computer, music player, TV, game console, smartphone or tablet
UPC	741532313236

WARRANTY AND SUPPORT

The BESTISAN SR01 Bookshelf Speakers come with a **12-month warranty** from the date of purchase. This warranty covers manufacturing defects and ensures customer satisfaction.

If you encounter any issues or have questions regarding your product, please contact BESTISAN customer support. Our team is dedicated to providing assistance and resolving any concerns you may have.

Please retain your proof of purchase for warranty claims.

SAFETY INFORMATION

- Do not expose the speakers to water or moisture.
- Avoid placing speakers near heat sources or in direct sunlight.
- Do not attempt to open or repair the speakers yourself. Refer all servicing to qualified personnel.
- Keep out of reach of children.
- Use only the provided power adapter.