

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

- › [PYY](#) /
- › [PYY Commercial Conveyor Toaster 300 Slices/Hour Instruction Manual](#)

PYY PYYDSLTT300SSUS

PYY Commercial Conveyor Toaster 300 Slices/Hour Instruction Manual

Model: PYYDSLTT300SSUS

1. INTRODUCTION

Thank you for choosing the PYY Commercial Conveyor Toaster. This heavy-duty stainless steel appliance is designed for high-efficiency toasting, capable of producing up to 300 slices per hour. It features versatile heating modes and speed controls, making it ideal for various commercial settings such as restaurants, bakeries, offices, and hotels. Please read this manual thoroughly before operation to ensure safe and optimal performance.



Figure 1: PYY Commercial Conveyor Toaster in operation, showcasing its efficiency.

2. SAFETY INSTRUCTIONS

- Always ensure the toaster is placed on a stable, level, and heat-resistant surface.
- Do not operate the toaster near flammable materials.
- Ensure the power supply matches the specifications (110V, 1900W).
- Unplug the toaster from the power outlet when not in use or before cleaning.
- Do not immerse the toaster in water or any other liquid.
- Keep hands and utensils away from the conveyor belt and heating elements during operation.
- Regularly clean the crumb tray to prevent fire hazards.
- This appliance is for commercial use only.

3. PRODUCT OVERVIEW AND COMPONENTS

The PYY Commercial Conveyor Toaster is constructed from durable stainless steel, designed for longevity and ease of maintenance. Key components include:

- **Conveyor Belt:** Food-grade chain net for smooth and continuous toasting.
- **Control Panel:** Features speed control knob and heating mode selector.
- **Adjustable Legs:** Four non-slip feet for stability on various surfaces.
- **Crumb Trays:** Removable front and rear trays for easy cleaning.
- **Condiment Holders:** Side-mounted holders for tongs or other accessories.

PREMIUM BUILD COMMERCIAL DETAILS

**REINFORCED
STAINLESS
STEEL**



**HEAVY-DUTY
CONVEYOR BELT**



**1900W POWER
OUTPUT**



Figure 2: Detailed view of the toaster's premium build and commercial-grade components.



Figure 3: Included accessories for the PYY Commercial Conveyor Toaster.

4. SETUP

1. **Unpacking:** Carefully remove all packaging materials and inspect the toaster for any damage.
2. **Attach Legs:** Screw the four adjustable non-slip legs into the designated sockets on the bottom of the toaster. Adjust them to ensure the unit is stable and level on your countertop.
3. **Install Crumb Trays:** Slide the front and/or rear crumb trays into their respective slots beneath the conveyor belt. Ensure they are securely in place to catch crumbs.
4. **Position Condiment Holders:** Attach the condiment holders to the side of the toaster if desired, for convenient storage of tongs.
5. **Placement:** Place the toaster in a well-ventilated area, away from walls and other appliances, to allow for proper heat dissipation.

Video 1: This video demonstrates the assembly process of the PYY Commercial Conveyor Toaster, including attaching the legs and trays.

5. OPERATING INSTRUCTIONS

1. **Power On:** Plug the toaster into a compatible 110V power outlet. The power indicator light will illuminate.
2. **Preheat:** Turn the 'TRAIN CONTROL' switch to 'ON' and allow the toaster to preheat for approximately 10 minutes. The heating elements will glow red.
3. **Select Heating Mode:** Use the 'HEATING PATTERN' knob to select your desired mode:
 - **BREAD:** Toasts both top and bottom for sliced bread.
 - **BUNS:** Heats only the bottom element, ideal for buns or bagels (cut side faces up).
 - **STBY (Standby):** Keeps items warm with gentle low heat, suitable for defrosting or holding.
4. **Adjust Speed/Darkness:** Use the 'COLOUR CONTROL' knob to adjust the conveyor belt speed. A lower number (slower speed) results in darker toast, while a higher number (faster speed) results in lighter toast. There are 7 speed options for various preferences.
5. **Load Items:** Place bread, bagels, buns, or other items onto the top rack of the conveyor belt. The toaster can accommodate two slices of bread or bagels at a time.
6. **Collect Toasted Items:** Toasted items will exit either the front or rear catch tray, depending on the selected output mode.



3 HEATING MODES

BREAD



Toast Both Sides
Perfect for
sliced bread

BUN



Top Heat Only
Cut side faces up

STBY



Gentle Low
Heat Warming
/Defrosting

Figure 4: Control panel illustrating the three available heating modes.

DUAL-SIDED OUTPUT FLEXIBILITY

**FRONT LOAD
ACCESS**



**BACK EXIT
PICKUP**



Figure 5: Speed control dial with 7 shades setting for desired toast darkness.

7 TOASTING SPEEDS FOR EVERY PREFERENCE

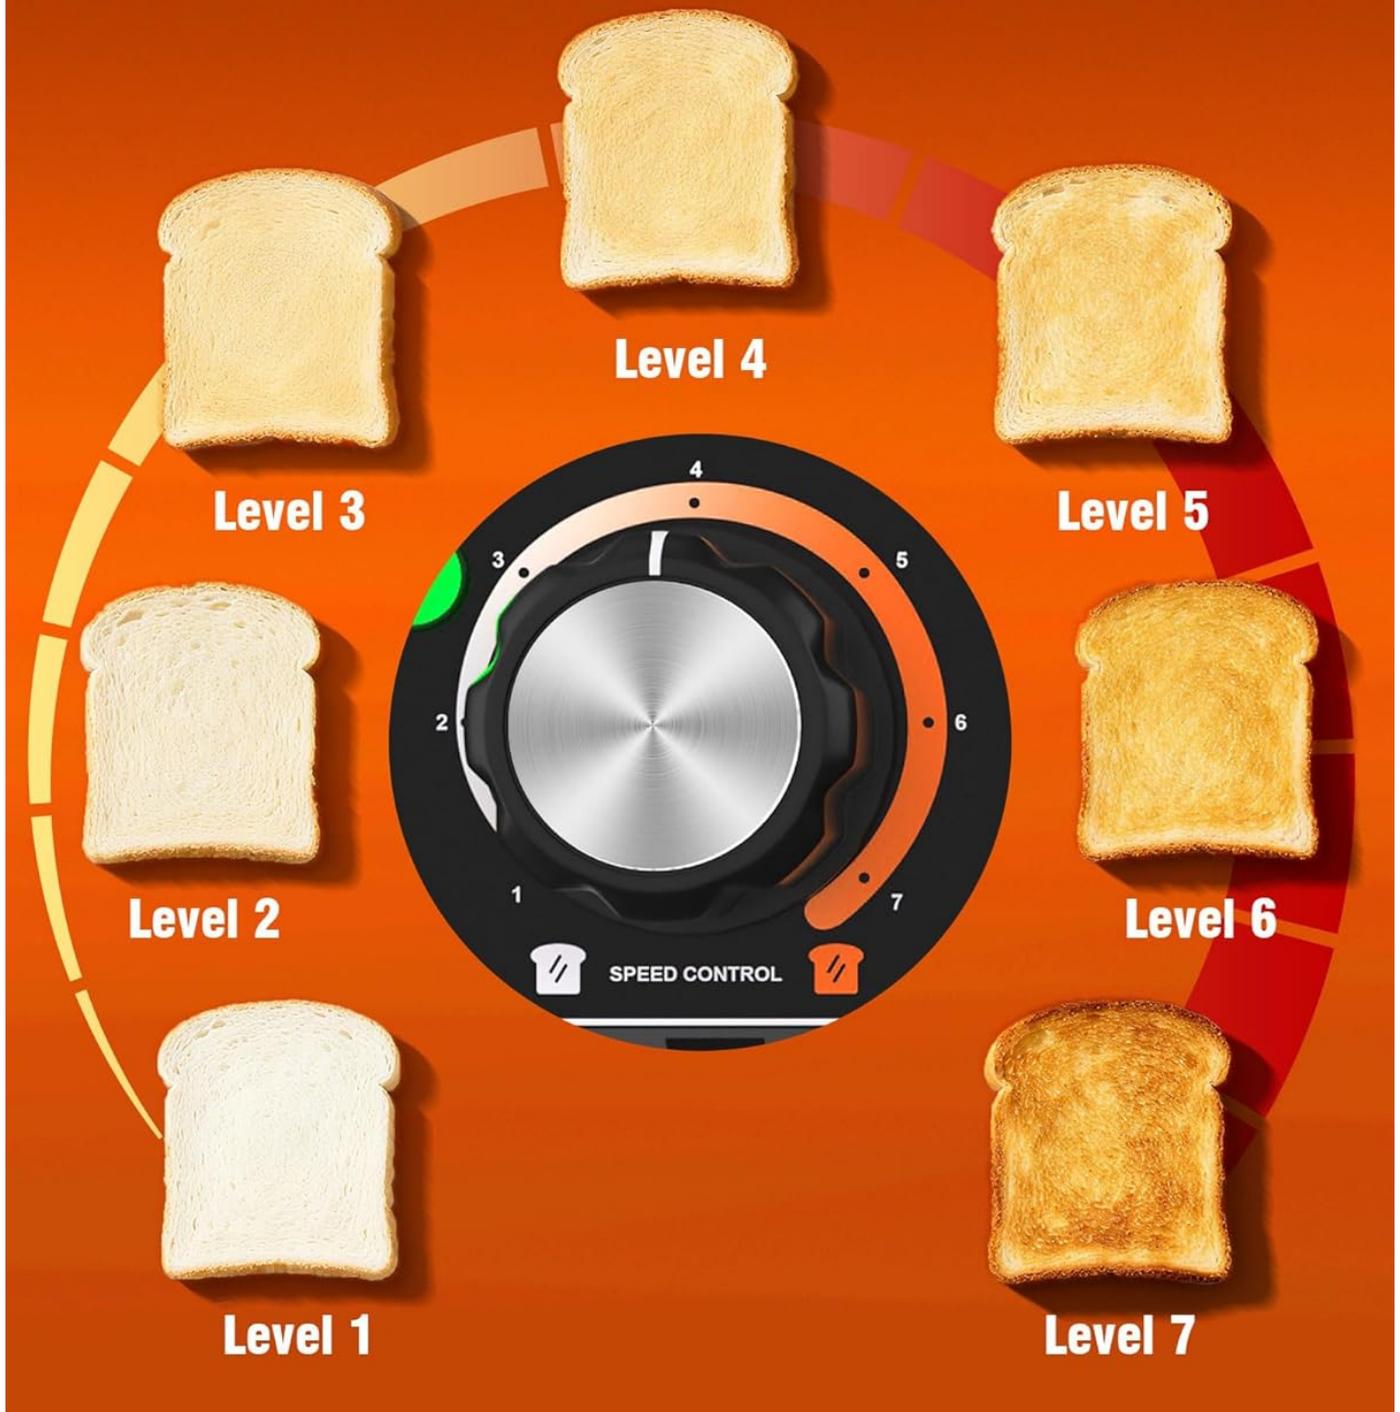


Figure 6: The toaster offers dual-sided output flexibility for convenience.

Video 2: This video demonstrates the operation of the PYY Commercial Conveyor Toaster, showing various items being toasted.

Video 3: This video provides a comprehensive overview of the PYY Commercial Conveyor Toaster in action, highlighting its features and ease of use.

6. MAINTENANCE AND CLEANING

Regular cleaning ensures the longevity and safe operation of your toaster. Always ensure the toaster is unplugged and completely cooled before cleaning.

1. **Crumb Tray Cleaning:** The toaster is equipped with removable crumb trays at both the front and rear. Simply slide out the trays, discard accumulated crumbs, and wash them with warm, soapy water. Rinse thoroughly and dry before reinserting.
2. **Exterior Cleaning:** Wipe the stainless steel exterior with a damp cloth and mild detergent. Avoid abrasive cleaners or scouring pads that could scratch the surface.
3. **Conveyor Belt:** For deeper cleaning, the conveyor belt can be accessed. Ensure the unit is off and cool. Wipe down the belt with a damp cloth.
4. **Air Vents:** The toaster has air vents for effective heat dissipation. Keep these clear of debris.

PRODUCT DIMENSION

PYY Countertop Conveyor Toaster - 300 Slices Per Hour



Power:
1900W/110V



Efficiency:
300 Slices/H



Speed:
7 Speeds



Mode:
Bread/Bun/Stby

Figure 7: The removable crumb tray simplifies cleaning and maintenance.

Video 4: This video also demonstrates the cleaning process, specifically showing how to remove and clean the crumb tray.

7. TROUBLESHOOTING

If you encounter any issues with your PYY Commercial Conveyor Toaster, please refer to the following common troubleshooting steps:

- **Toaster Not Powering On:** Check if the power cord is securely plugged into a functional outlet. Verify the power switch is in the 'ON' position.
- **Items Not Toasting Evenly:** Ensure the toaster has preheated sufficiently. Adjust the 'COLOUR CONTROL' knob to a slower speed for darker toasting. Check that the selected 'HEATING PATTERN' mode is appropriate for the item (e.g., 'BREAD' for two-sided toasting).
- **Conveyor Belt Not Moving:** Ensure the 'TRAIN CONTROL' switch is in the 'ON' position. Check for any obstructions on the conveyor belt.
- **Excessive Smoke:** Unplug the toaster immediately. This may indicate accumulated crumbs or food debris. Allow to cool, then thoroughly clean the crumb trays and interior.

If the problem persists after attempting these steps, please contact PYY customer support for assistance.

8. SPECIFICATIONS

Brand	PYY
Model Number	PYYDSLTT300SSUS
Color	Silver
Material	Stainless Steel
Product Dimensions	21.46"D x 18.9"W x 17.13"H
Wattage	1900 watts
Voltage	110 Volts
Item Weight	42.5 Pounds
Number of Settings (Speed)	7
Special Features	Anti-Slip Base, LED Indicator, Self Centering Rack, Speed & Temp Control, Warming Rack
UPC	797444490954

9. WARRANTY AND SUPPORT

PYY is committed to providing high-quality products. For any warranty claims, technical support, or operational questions, please contact PYY customer service. Refer to your purchase documentation for specific warranty terms and contact information. Many customers have reported positive experiences with PYY's responsive customer support for parts and service.