

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

> [Qiyuan](#) /

> [IPX6 Outdoor Power Strip Weatherproof, Waterproof Surge Protector with 6 Wide Outlet with 3 USB Ports, 6FT Long Extension Cord, Wall Mountable for Outside Decorations and More UL Listed\(Black\) Instruction Manual](#)

Qiyuan ZJ-202

IPX6 Outdoor Power Strip Instruction Manual

Model: ZJ-202 | Brand: Qiyuan

1. INTRODUCTION

This manual provides essential information for the safe and efficient operation of your Qiyuan IPX6 Outdoor Power Strip. Please read it thoroughly before use and retain it for future reference.

Key Features:

- 9-in-1 Power Strip with 6 well-spaced AC outlets and 3 USB charging ports.
- IPX6 Weatherproof rating, resistant to rain, water splashes, and flowing water.
- Patented safety-first design with a safety lock to prevent accidental shocks.
- Adaptive and user-friendly design supporting both desktop and wall-mounted usage.
- Superior overload protection and robust construction with 1382°F heat-retardant ABS+PC material.

2. SAFETY INFORMATION

Always adhere to the following safety guidelines to prevent injury or damage to the product.

- **Do not submerge:** While IPX6 rated, the power strip cannot be fully submerged in water.
- **Proper Plug Insertion:** The patented socket design requires both prongs of a standard US plug for activation. Do not attempt to insert foreign objects.
- **Overload Protection:** The device features automatic overload protection. If it trips, disconnect some devices before resetting.
- **Operating Environment:** Ensure the operating temperature is within -36°F to 176°F and altitude is below 2000m.
- **Cord Integrity:** Do not use if the 16AWG heavy-duty extension cord is damaged.

MULTI SAFETY PROTECTION

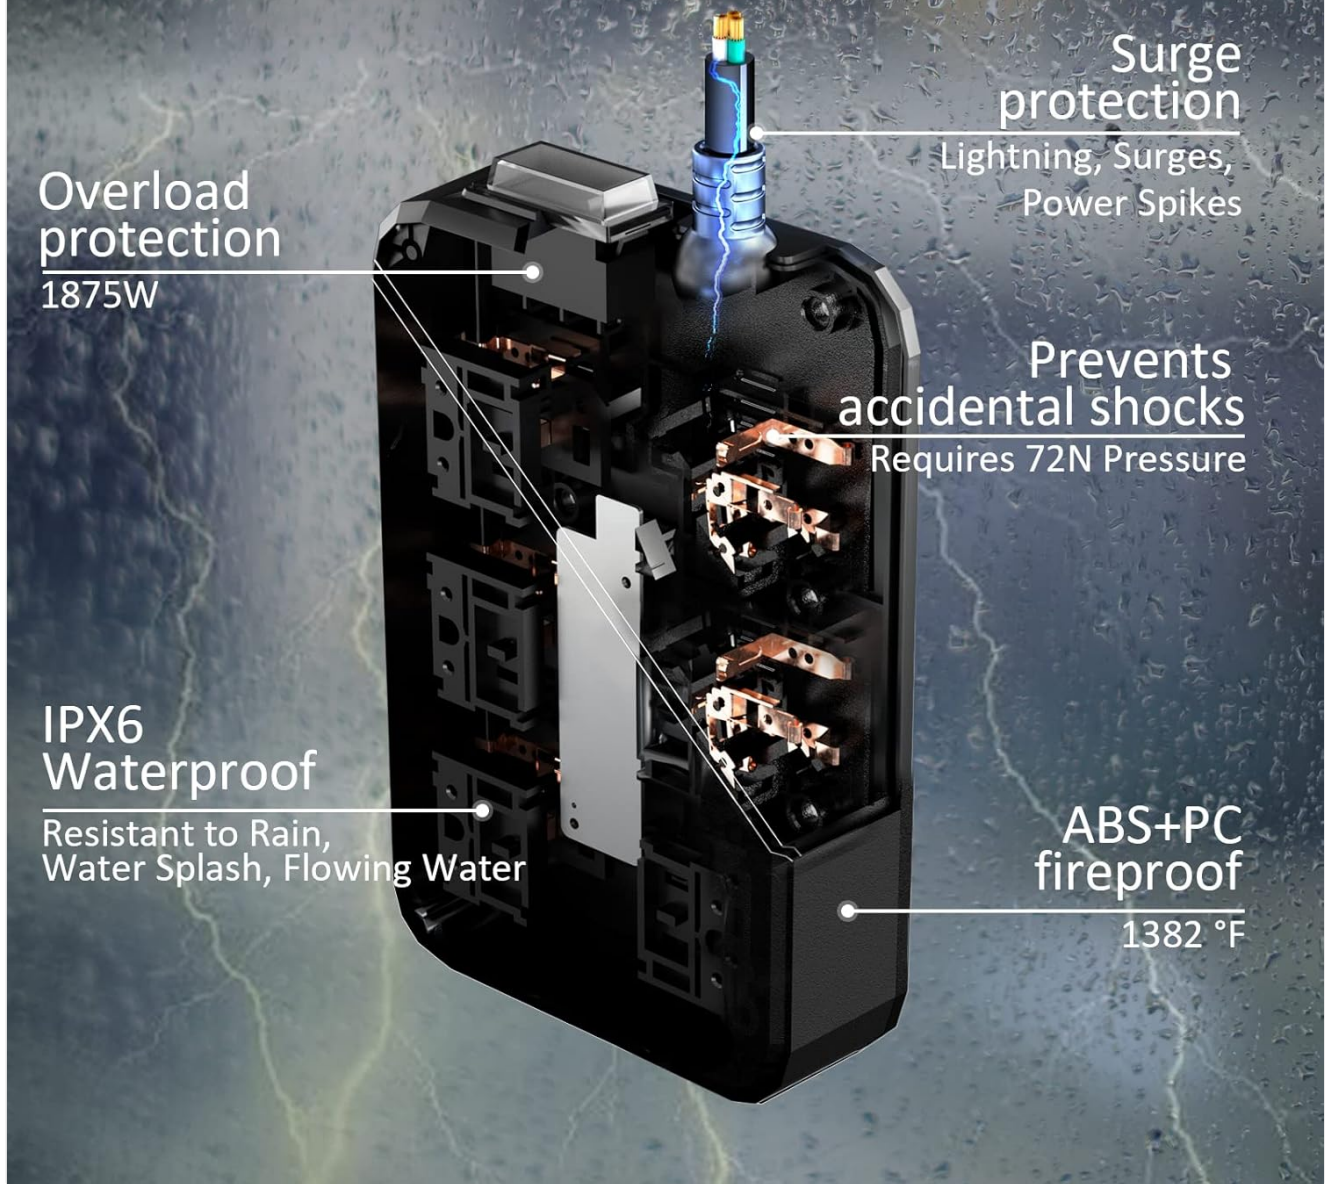


Image: Multi-Safety Protection features, highlighting surge protection, overload protection, IPX6 waterproofing, and fire-retardant materials.

PREVENTS ACCIDENTAL SHOCKS



Image: Safety Lock Protection, demonstrating how the design prevents accidental shocks by requiring proper plug insertion.

3. PRODUCT OVERVIEW

Familiarize yourself with the components of your Qiyuan IPX6 Outdoor Power Strip.



Image: The Qiyuan IPX6 Outdoor Power Strip, showcasing its 6 AC outlets and 3 USB ports, designed for weatherproof use.

Components:

- **AC Outlets (x6):** Standard US outlets, widely spaced to accommodate larger adapters.
- **USB Ports (x3):** For charging USB-powered devices.
- **Power Cord:** 6-foot 16AWG heavy-duty extension cord with a 45-degree angled plug.
- **Power Switch:** On/Off switch for controlling power to all outlets.
- **Mounting Holes (x2):** Located on the rear for wall-mounting.

4. SETUP

Your power strip is designed for both desktop and wall-mounted use.

Desktop Use:

1. Place the power strip on a stable, flat surface.
2. Plug the power strip's cord into a standard 100-250V wall outlet.

3. Ensure the power switch is in the OFF position before connecting devices.

Wall Mounting:

1. Identify a suitable location for mounting, ensuring it is within reach of a power outlet and away from excessive moisture or direct water spray (unless specifically designed for that exposure).
2. Use the two mounting holes on the rear of the device as a template. A drilling guide may be provided on the product box.
3. Securely fasten the power strip to the wall using appropriate screws (not included) that fit the mounting holes.
4. Plug the power strip's cord into a standard 100-250V wall outlet.



Image: Wall-mounted setup, illustrating the 360-degree rotation of the plug and the two mounting holes for secure installation.

5. OPERATING INSTRUCTIONS

Using your Qiyuan power strip is straightforward.

1. Ensure the power strip is securely plugged into a wall outlet.

2. Plug your devices into the AC outlets or USB ports. The wide spacing of AC outlets accommodates larger adapters.
3. Press the power switch to the ON position. The indicator light (if present) will illuminate.
4. To turn off, press the power switch to the OFF position.



Image: The power strip in operation, demonstrating its capacity to power up to 9 devices simultaneously via 6 AC outlets and 3 USB ports.

INDOOR & OUTDOOR



Image: Versatile indoor and outdoor use, highlighting the IPX6 waterproof capability in various environments.

6. MAINTENANCE

Proper maintenance ensures the longevity and performance of your power strip.

- **Cleaning:** Disconnect the power strip from the wall outlet before cleaning. Use a soft, dry cloth to wipe the exterior. Do not use liquid cleaners or immerse in water.
- **Storage:** When not in use for extended periods, store the power strip in a cool, dry place away from direct sunlight and extreme temperatures.
- **Inspection:** Periodically inspect the power cord and the power strip for any signs of damage, such as frayed wires, cracks, or discoloration. If damage is found, discontinue use immediately.

7. TROUBLESHOOTING

If you encounter issues with your power strip, refer to the following common problems and solutions.

Problem	Possible Cause	Solution
No power to devices.	Power switch is OFF. Overload protection tripped. Power strip not plugged in.	Turn power switch ON. Unplug some devices, then reset the power strip. Ensure the power strip is securely plugged into a live wall outlet.
USB ports not charging.	Device not compatible. Cable issue.	Verify device charging requirements. Try a different USB cable.
Water ingress despite IPX6 rating.	Product submerged or exposed to high-pressure jets.	IPX6 protects against strong jets of water, not submersion. Ensure proper placement and avoid high-pressure washing. Disconnect immediately and allow to dry if water enters.

8. SPECIFICATIONS

Detailed technical specifications for your Qiyuan power strip.

Feature	Detail
Model Number	ZJ-202
AC Outlets	6 (Widely Spaced)
USB Ports	3 (5V/2.4A/12W each)
AC Output	1875W/15A
Operating Voltage	100-250V
Waterproof Rating	IPX6 (Resistant to rain, water splashes, flowing water)
Cord Length	6FT (16AWG heavy-duty)
Material	1382°F heat-retardant ABS+PC
Dimensions	4.6 x 4 x 0.1 inches
Item Weight	1 pound
Operating Temperature	-36°F to 176°F
Altitude	2000m

9. WARRANTY AND SUPPORT

For warranty information or technical support, please contact Qiyuan customer service. Details can typically be found on the product packaging or the official Qiyuan website.

Manufacturer: Qiyuan

Date First Available: April 27, 2022

