

Manuals.plus /
› Giaomar /
› Giaomar C11 Mini Projector User Manual

Giaomar C11

Giaomar C11 Mini Projector User Manual

Model: C11 | Brand: Giaomar

1. INTRODUCTION

Thank you for purchasing the Giaomar C11 Mini Projector. This compact and powerful projector is designed to provide an immersive viewing experience for home entertainment, outdoor camping, and even light business presentations. Featuring WiFi and Bluetooth connectivity, 1080P support, and a large display capability, the C11 offers versatility and high performance.

Please read this manual thoroughly before using the projector to ensure proper operation and to maximize its lifespan. Keep this manual for future reference.



Figure 1.1: Giaomar C11 Mini Projector and its projection capabilities.

2. PACKAGE CONTENTS

Please check the package contents upon unboxing. If any items are missing or damaged, please contact customer support.

- Giaomar C11 Mini Projector
- Power Adapter
- Remote Control (AAA batteries not included)
- HDMI Cable
- AV Cable
- User Manual

3. PRODUCT FEATURES

- **High Brightness & Resolution:** 7500 Lumens brightness and 1080P Full HD enhanced technology for clear, realistic images.
- **Wireless Connectivity:** Built-in 2.4G WiFi for seamless screen mirroring from iOS, Android, and Windows devices. Bluetooth 5.0 for connecting external audio devices.
- **Large Display Size:** Projects up to a 210-inch screen, offering a significantly larger display than many standard projectors at the same distance.
- **Wide Compatibility:** Multiple ports including VGA, USB, HDMI, AV, and Audio allow connection to Fire Stick, Roku Stick, Chromecast, PS4/XBOX, Laptops, DVD Players, and smartphones.
- **Integrated Audio:** Built-in stereo speaker for high-fidelity sound.
- **Efficient Cooling:** Dual integrated cooling fans for better performance and heat dissipation.

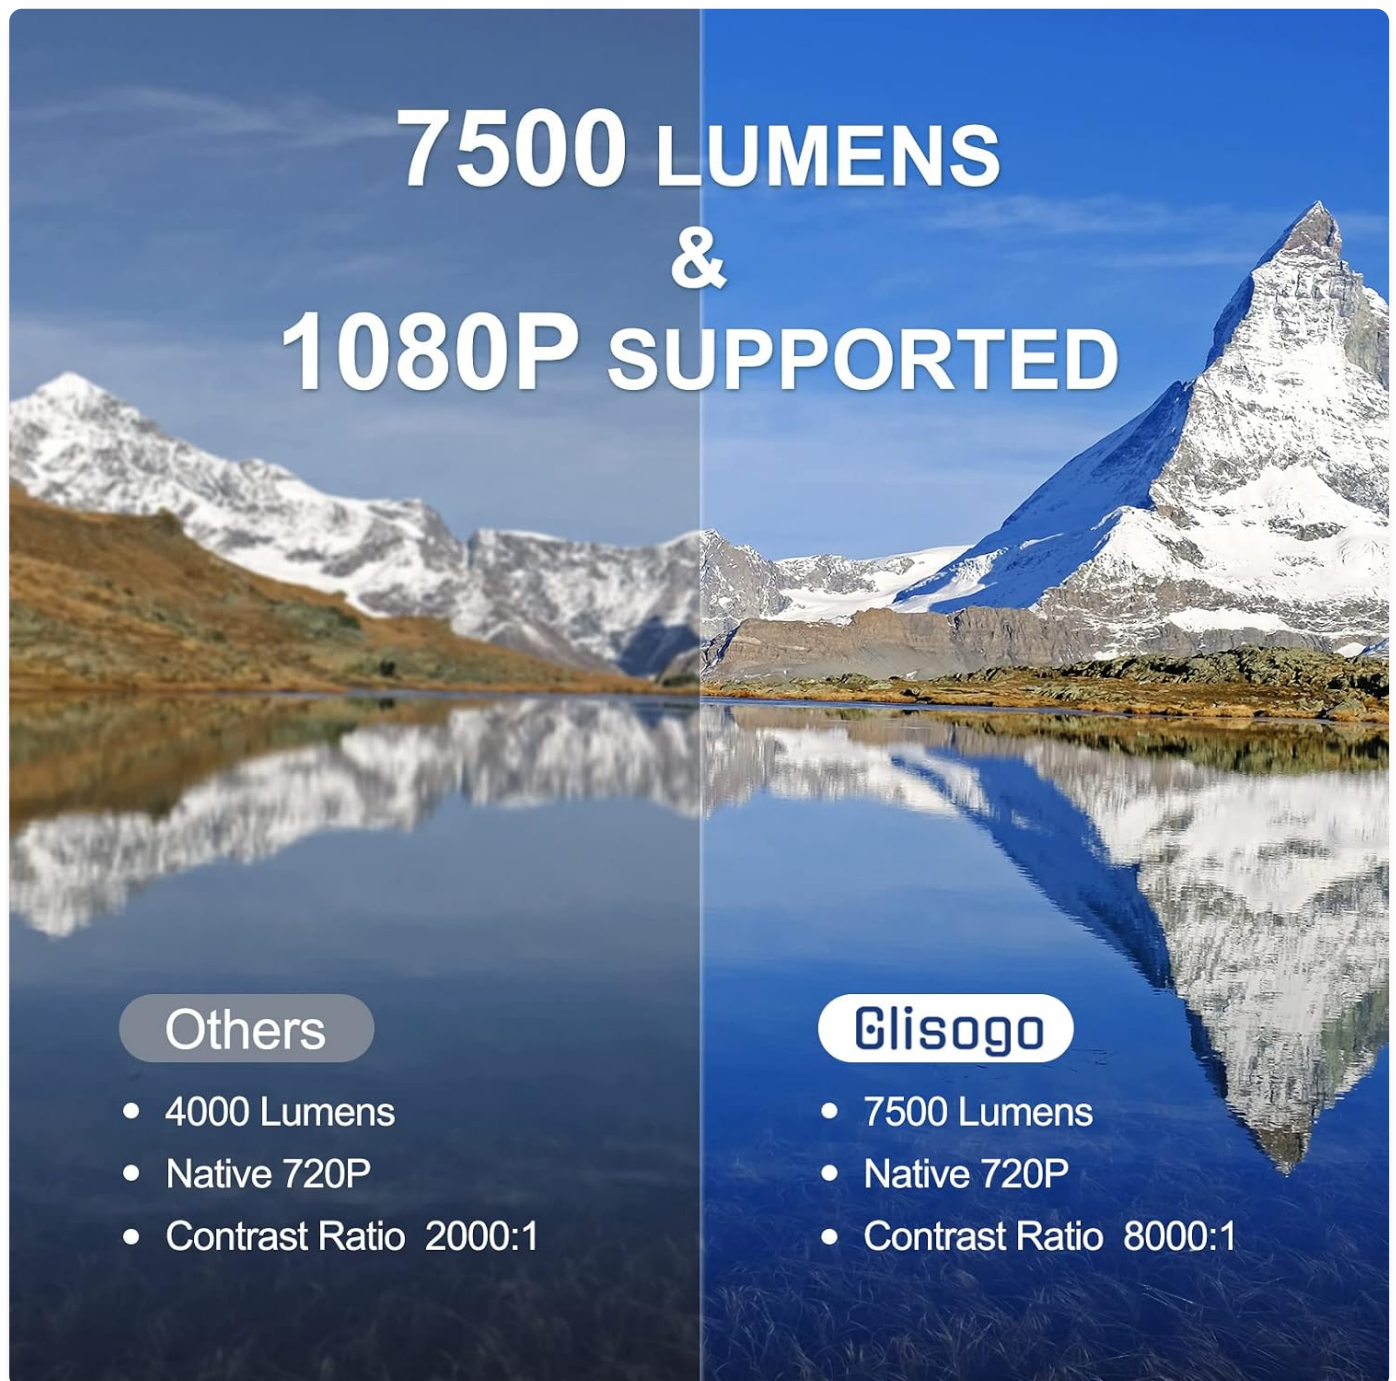


Figure 3.1: Brightness and resolution comparison.

5.0 Bluetooth Projector

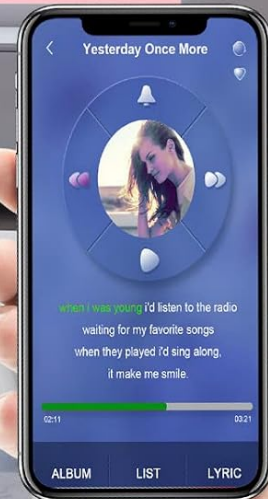


Figure 3.2: Bluetooth 5.0 connectivity for audio.

2.4G WiFi

connection and
Screen mirroring



Figure 3.3: 2.4G WiFi for screen mirroring.

ADJUSTABLE DISPLAY SIZE

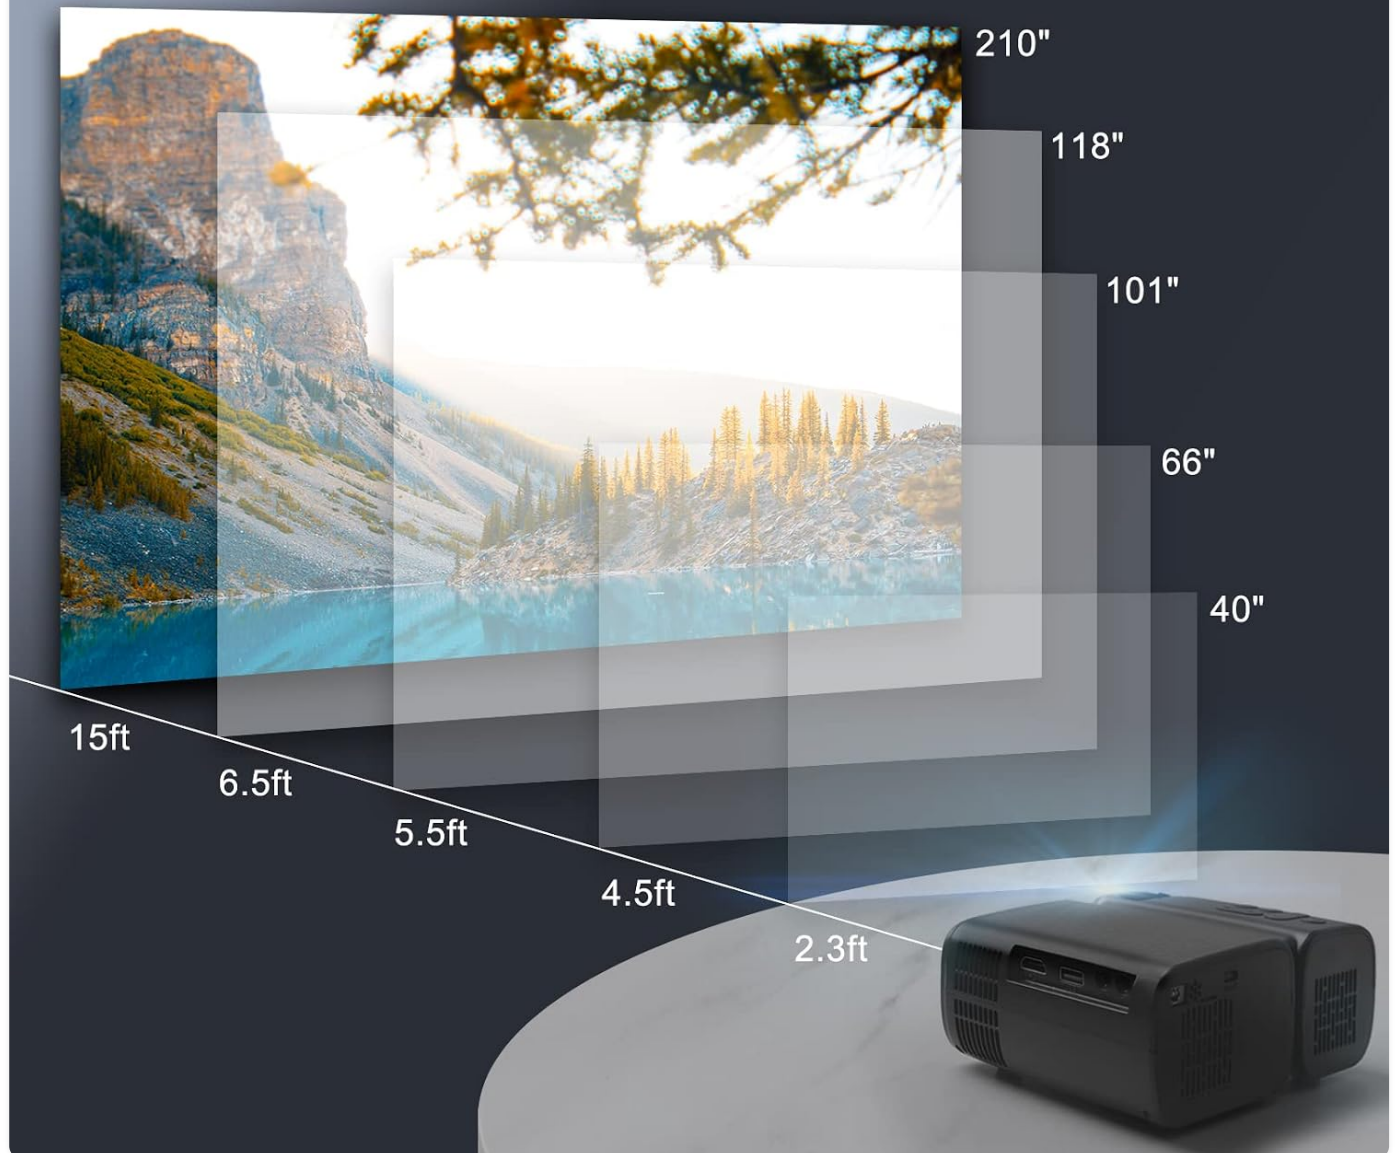


Figure 3.4: Adjustable display size based on distance.

DUAL INTEGRATED COOLING FANS FOR BETTER PERFORMANCE



Figure 3.5: Dual integrated cooling fans for optimal performance.



Figure 3.6: Multifunctional use of the projector.

4. SETUP GUIDE

4.1 Power Connection

1. Connect the power adapter to the projector's power input port.
2. Plug the power adapter into a standard electrical outlet.
3. The power indicator light on the projector will illuminate.

4.2 Placement and Focus

1. Place the projector on a stable, flat surface or mount it using a compatible tripod (not included).
2. Position the projector at the desired distance from the projection surface (wall or screen) to achieve the desired screen size. Refer to Figure 3.4 for recommended distances.
3. Turn on the projector.

4. Adjust the focus ring on the projector lens until the image appears clear and sharp.

4.3 Connecting Devices

The Giaomar C11 Mini Projector supports various input sources:

- **HDMI:** Connect gaming consoles (PS4/XBOX), laptops, TV sticks (Fire Stick, Roku Stick, Chromecast), or DVD players using an HDMI cable.
- **USB:** Insert a USB disk to play media files directly.
- **AV:** Use the provided AV cable to connect older devices with AV output.
- **Audio Out:** Connect external speakers or headphones via the 3.5mm audio jack.
- **Wireless Connection (WiFi):** For screen mirroring from smartphones and tablets.
- **Bluetooth:** For connecting external Bluetooth speakers or headphones.

5. OPERATING INSTRUCTIONS

5.1 Powering On/Off

- **Power On:** Press the power button on the projector or the remote control.
- **Power Off:** Press the power button again. Confirm shutdown if prompted.

5.2 Navigation

Use the buttons on the projector or the remote control to navigate the on-screen menu. The remote control offers full functionality for input selection, volume, and settings adjustments.

5.3 Screen Mirroring (WiFi)

The projector supports wireless screen mirroring for iOS, Android, and Windows devices. Ensure your device and the projector are connected to the same 2.4G WiFi network.

1. Select the 'Screen Mirroring' input source on the projector.
2. Follow the on-screen instructions specific to your device (e.g., AirPlay for iOS, Cast/Smart View for Android).
3. Select the projector from your device's available mirroring options.

***Note:** Due to HDCP copyright protection, direct screen mirroring from streaming apps like Netflix, Hulu, or Amazon Prime Video is not supported. For these services, please use an Amazon TV stick, Chromecast, or Roku device connected via HDMI.*

5.4 Bluetooth Audio Connection

1. Ensure your Bluetooth speaker or headphones are in pairing mode.
2. On the projector, navigate to the Bluetooth settings.
3. Select your device from the list of available Bluetooth devices to pair.

5.5 Optimal Viewing Environment

For the best image quality, it is recommended to use the projector in a dark environment with lights turned off. This enhances contrast and brightness perception.

6. MAINTENANCE

6.1 Dust-proof Net Cleaning

Regular cleaning of the dust-proof net is necessary to prevent dust from accumulating inside the lens, which can cause dark spots on the projection screen. If dark spots appear, cleaning the dust-proof net often resolves the issue. Refer to the detailed instruction video provided by the manufacturer if you are unsure how to perform this.

6.2 Heat Dissipation

To prevent overheating and ensure optimal performance, do not block the heat dissipation vents of the projector. Avoid covering the projector with cloth or placing it in an enclosed space during use.

7. TROUBLESHOOTING

- **No Sound from Netflix/Streaming Apps:** If there is no sound when playing videos from Netflix or similar apps, disable Dolby Sound. Go to Settings > Display and Sound > Audio > Dolby Digital Out, and then turn on Dolby Digital Plus.
- **WiFi Connection Issues:** If the WiFi connection is delayed or fails, check your home network environment. Ensure the WiFi signal percentage displayed on the access point is strong (ideally lower than -50%). A signal reaching -80% may cause connection failures. Some mobile devices may also have compatibility issues with screen mirroring.
- **Dark Spots on Screen:** This is typically caused by dust inside the lens. Refer to Section 6.1 for cleaning instructions.
- **Image Not Clear/Blurry:** Adjust the focus ring on the projector lens. Ensure the projector is placed at an appropriate distance from the screen.
- **Remote Control Not Working:** Ensure 2 "AAA" batteries are correctly inserted into the remote control. Check battery polarity.

8. SPECIFICATIONS

Brand Name	Giaomar
Model Number	C11
Item Weight	2.2 pounds
Product Dimensions	6.49 x 5.03 x 2.59 inches
Color	Green
Speaker Type	Built-In
Recommended Uses	Home Cinema, Business
Connectivity Technology	Wi-Fi, USB, AV, HDMI, Audio
Display Resolution	1920 x 1080 (Supported)
Visible Screen Diagonal	210 inches / 534 cm
Lamp Lifetime	65,000 hours

9. WARRANTY AND SUPPORT

Giaomar offers a **365-day warranty service** and a **6-month free components replacement service** for this product. The product is certified with FCC, PSE, ROHS, CE, and WEEE standards.

For any questions, technical assistance, or warranty claims, please contact Giaomar customer support. You can typically find contact information by visiting the seller's store page on Amazon and looking for a 'Contact Seller' or 'Ask a Question' button.

© 2023 Giaomar. All rights reserved.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

<https://manuals.plus/asin/B09YYT3B43>

More documents and user manuals: <https://manuals.plus/>