EJEAS Q7

EJEAS EUC Universal Remote Control User Manual

Model: Q7

Introduction

The EJEAS EUC Universal Remote Control is designed to enhance your riding safety and convenience by allowing seamless control of your EJEAS intercom system directly from your motorcycle or bicycle handlebars. This device eliminates the need to remove your hands from the handlebars to operate your intercom, ensuring a safer and more focused riding experience.

Package Contents

Upon opening the package, please verify that all the following components are included:

- EJEAS EUC Universal Remote Control Unit
- USB Charging Cable
- Allen Key for Installation
- Mounting Shims (multiple sizes for various handlebar diameters)
- User Manual



Image: All components included in the EJEAS EUC Universal Remote Control package.

Product Features and Controls

The EJEAS EUC remote control features intuitive buttons and indicators for easy operation of your intercom system.

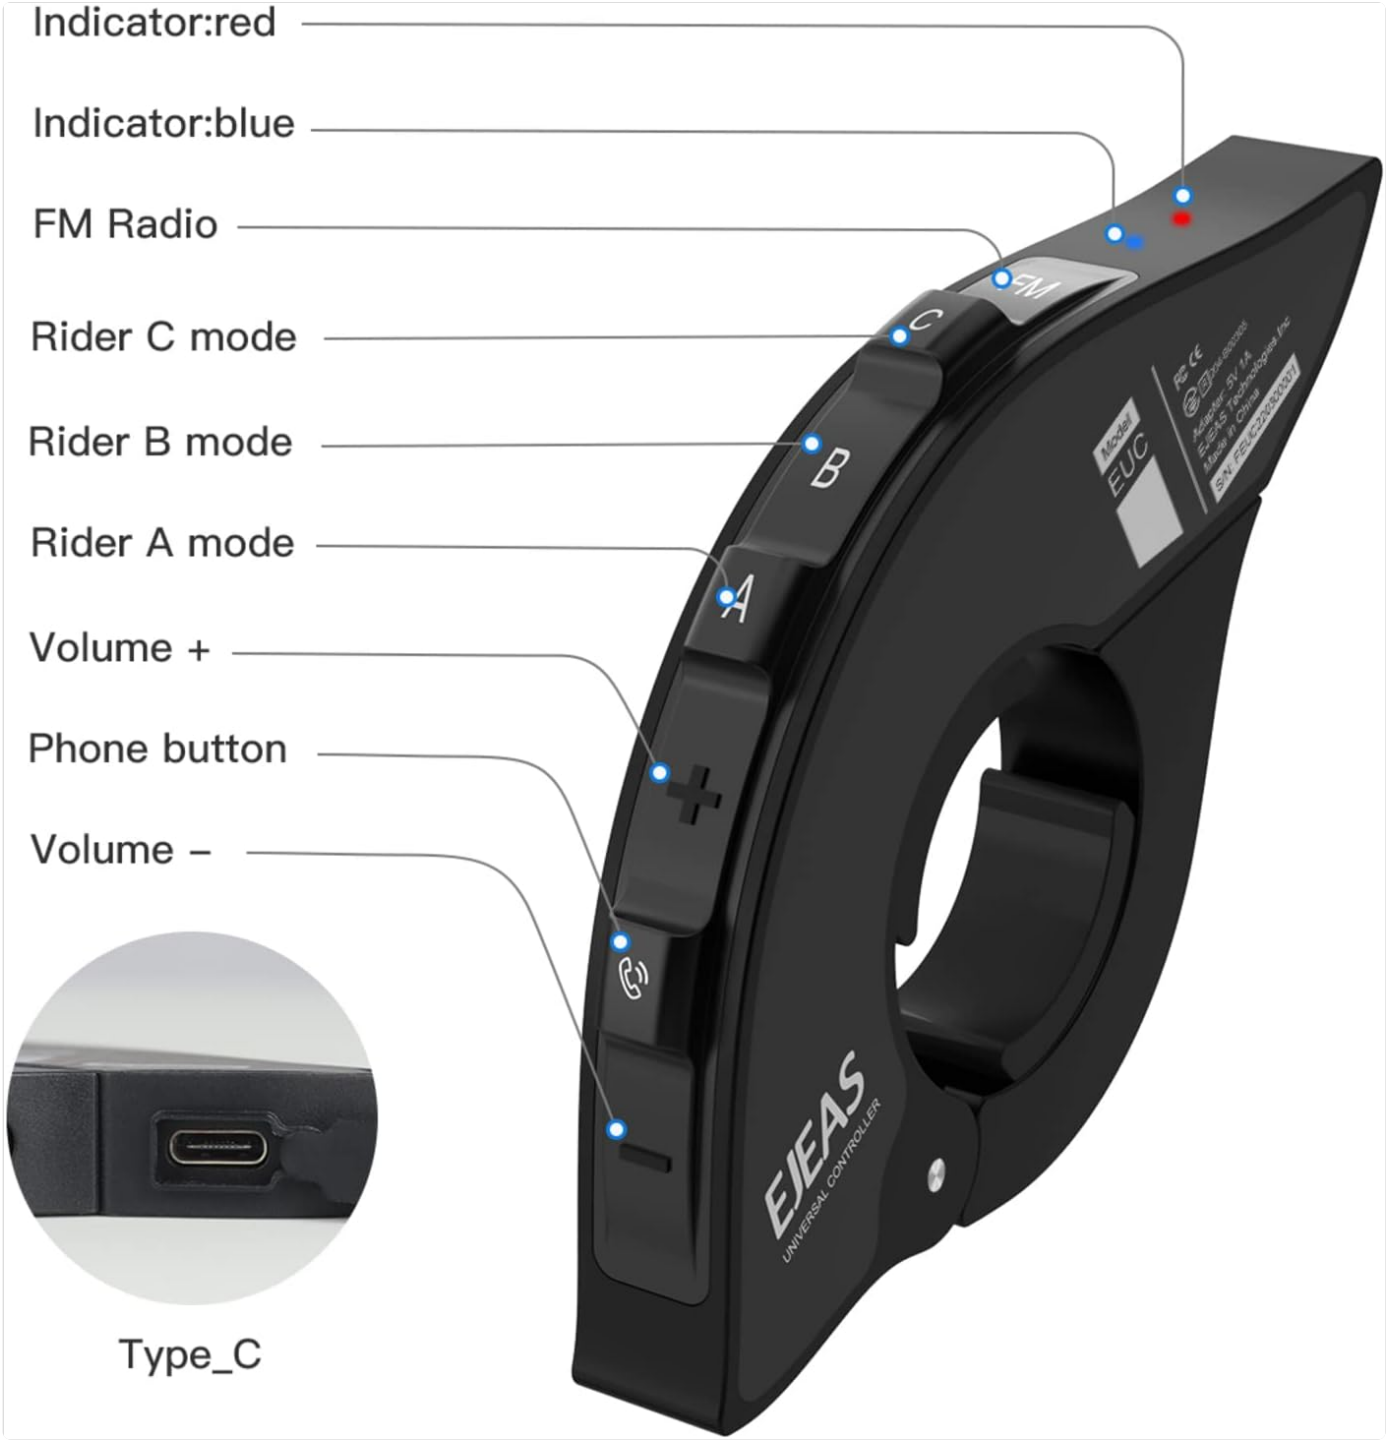


Image: Detailed diagram of the EJEAS EUC remote control's buttons and indicators.

- **Indicator Lights:** Red and Blue LEDs indicate device status (e.g., pairing, charging, low battery).
- **FM Button:** Activates or deactivates the FM radio function on your paired intercom.
- **A, B, C Buttons:** Used for switching between rider modes or intercom channels, depending on your intercom model.
- **Volume + / - Buttons:** Adjusts the audio volume of your intercom.
- **Phone Button:** Manages phone calls (answer, end, reject) and can activate voice assistant.
- **Type-C Port:** Used for charging the remote control.

Setup and Installation

The EJEAS EUC remote control is designed for easy installation on most motorcycle and bicycle handlebars.

1. **Choose Mounting Location:** Select a suitable position on your handlebar that allows for easy access to the buttons without obstructing your grip or other controls.

2. **Select Shims:** Identify the correct mounting shims from the package that best fit the diameter of your handlebar. The shims ensure a snug and secure fit.
3. **Attach Remote:** Open the remote control's clamp. Place the selected shims around the handlebar at your chosen location. Position the remote control over the shims and close the clamp.
4. **Secure with Allen Key:** Use the provided Allen key to tighten the screw on the remote control's clamp until it is firmly secured to the handlebar. Ensure it does not rotate freely but avoid over-tightening.



Image: EJEAS EUC remote control securely installed on a motorcycle handlebar.



Image: The remote control's position on the handlebar, designed for convenient access.

Operating Instructions

The EJEAS EUC remote control is designed to pair with compatible EJEAS intercoms to provide remote functionality. Ensure your intercom is powered on and in pairing mode as per its own user manual.

Pairing with Intercom

1. Power on the EJEAS EUC remote control by pressing and holding the Phone button until the indicator light flashes.
2. Put your EJEAS intercom (e.g., Q2, Q7, V4 Plus, Q8, V6 Pro+) into pairing mode. Refer to your intercom's specific manual for instructions on entering pairing mode.
3. Once both devices are in pairing mode, they should automatically connect. The indicator light on the EUC remote will change to a steady blue or turn off, indicating a successful connection.

Basic Functions

- **Volume Control:** Press the **Volume +** button to increase volume, and the **Volume -** button to decrease volume.
- **Phone Calls:**
  - Press the **Phone** button once to answer an incoming call.
  - Press the **Phone** button once during a call to end it.
  - Press and hold the **Phone** button to reject an incoming call or activate your phone's voice assistant.
- **Intercom Mode Switching:** Use the **A**, **B**, and **C** buttons to switch between different intercom modes or channels as supported by your paired EJEAS intercom. Consult your intercom's manual for specific functionality of these buttons.
- **FM Radio:** Press the **FM** button to toggle the FM radio function on or off.



Image: The EJEAS EUC remote control working with various EJEAS intercom models.

Charging

The EJEAS EUC remote control is equipped with a rechargeable battery. When the battery is low, the indicator light will signal this condition (e.g., flashing red). To charge the device:

1. Connect the provided USB charging cable to the Type-C port on the remote control.

2. Connect the other end of the USB cable to a standard USB power adapter (e.g., 5V/1A) or a computer's USB port.
3. The indicator light will typically show a solid red during charging and turn off or change color when fully charged.

The EUC remote control has very low power consumption, allowing for extended use on a single charge.

Maintenance

To ensure the longevity and optimal performance of your EJEAS EUC Universal Remote Control, follow these maintenance guidelines:

- **Cleaning:** Wipe the device with a soft, damp cloth. Do not use harsh chemicals or abrasive cleaners.
- **Storage:** Store the remote control in a cool, dry place when not in use. Avoid extreme temperatures.
- **Water Resistance:** Note that this device is not water-resistant. Avoid exposure to heavy rain or submersion in water.
- **Battery Care:** For optimal battery life, avoid fully discharging the battery frequently. Charge the device regularly, even if not in constant use.

Troubleshooting

If you encounter issues with your EJEAS EUC Universal Remote Control, please refer to the following common problems and solutions:

Problem	Possible Cause / Solution
Remote control does not power on.	Battery is depleted. Charge the device using the provided USB cable.
Cannot pair with intercom.	◦ Ensure both the remote and intercom are in pairing mode. ◦ Make sure the intercom model is compatible (Q2/Q7/V4 Plus/Q8/V6 Pro+). ◦ Move the devices closer to each other. ◦ Restart both devices and try pairing again.
Buttons are unresponsive.	◦ Ensure the remote control is powered on and successfully paired with the intercom. ◦ Check battery level. ◦ Restart the remote control.
Remote control falls off or rotates on handlebar.	◦ Ensure the correct mounting shims were used for your handlebar diameter. ◦ Tighten the clamp screw firmly with the Allen key.

If the issue persists, please contact EJEAS customer support for further assistance.

Specifications

Feature	Detail
Model	Q7 (EUC-1)
Material	Plastic

Feature	Detail
Dimensions (L x W x H)	Approx. 11.5 cm x 6.5 cm x 1.3 cm (4.5 x 2.5 x 0.5 inches)
Weight	100 g (0.22 lbs)
Battery Type	Rechargeable Lithium Polymer
Charging Port	USB Type-C
Control Type	Media Control
Connectivity Technology	Wireless (Bluetooth)
Water Resistance Level	Not Water Resistant
Compatible EJEAS Intercoms	Q2, Q7, V4 Plus, Q8, V6 Pro+



Image: Dimensions of the EJEAS EUC Universal Remote Control.

Warranty and Support

EJEAS products come with a commitment to quality and customer satisfaction.

- **Warranty:** This product includes a 12-month warranty from the date of purchase.
- **Money-Back Guarantee:** We offer a 3-month unconditional money-back guarantee.
- **Customer Support:** If you have any questions, concerns, or require assistance with your EJEAS EUC Universal Remote Control, please contact our customer support team. We aim to provide a satisfactory response within 24 hours.

For more information and support, please visit the official EJEAS store or contact us through your purchase platform.
Visit the EJEAS Store on Amazon

© 2024 EJEAS. All rights reserved.