Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

WINGBO SYCF6001

WINGBO 60 Inch DC Ceiling Fan User Manual

Model: SYCF6001 | Brand: WINGBO

Introduction

This manual provides detailed instructions for the installation, operation, and maintenance of your WINGBO 60 Inch DC Ceiling Fan. Please read this manual thoroughly before installation and keep it for future reference. This ceiling fan features 3 reversible carved wood blades, a 6-speed noiseless DC motor, and an integrated LED light, designed for modern indoor environments.

Safety Information

- Ensure power is disconnected at the circuit breaker before installation or maintenance.
- All wiring must be in accordance with national and local electrical codes.
- Consult a qualified electrician if you are unsure about the installation process.
- The mounting structure must be capable of supporting the weight of the fan.
- Do not operate the fan if any part is damaged.
- Keep hands and objects clear of the fan blades during operation.

Package Contents

Before beginning installation, ensure all components listed below are present and undamaged. Refer to the packing list image for visual confirmation.



Figure 1: Complete set of WINGBO 60 Inch DC Ceiling Fan components, including three carved wood blades, motor assembly, downrods, mounting bracket, remote control, and various screws and connectors.

For a step-by-step visual guide on unpacking and identifying components, please refer to the official installation video below, starting at the 0:04 mark.

[redacted]

Video 1: WINGBO 60" Ceiling Fan with Light Installation Guide. This video demonstrates the unpacking and assembly process, providing visual instructions for each step.

Product Features

- **Reversible Quiet DC Motor:** Operates on 6 forward and reverse speeds, allowing for downdraft mode in summer and updraft mode in winter. The DC motor is energy-efficient and quiet.
- **Integrated LED Light Kit:** Features an 18W LED light source with 3 color temperature options (3000K Warm, 4500K Neutral, 6000K Daylight).
- **Carved Wood Blades:** Three 60-inch solid wood blades with a 12° blade pitch ensure efficient and quiet air

delivery. FSC-Certified wood.

- **Remote Control:** Included handheld remote for easy adjustment of fan speeds, light settings, and timer functions.
- **Timer Function:** Set a timer for 1-8 hours to automatically turn off the fan.
- **Versatile Installation:** Suitable for damp locations, including living rooms, bedrooms, and larger bathrooms. Includes 4.5" and 12" downrods for varying ceiling heights.



Figure 2: Reversible Quiet Motor functionality for year-round comfort.

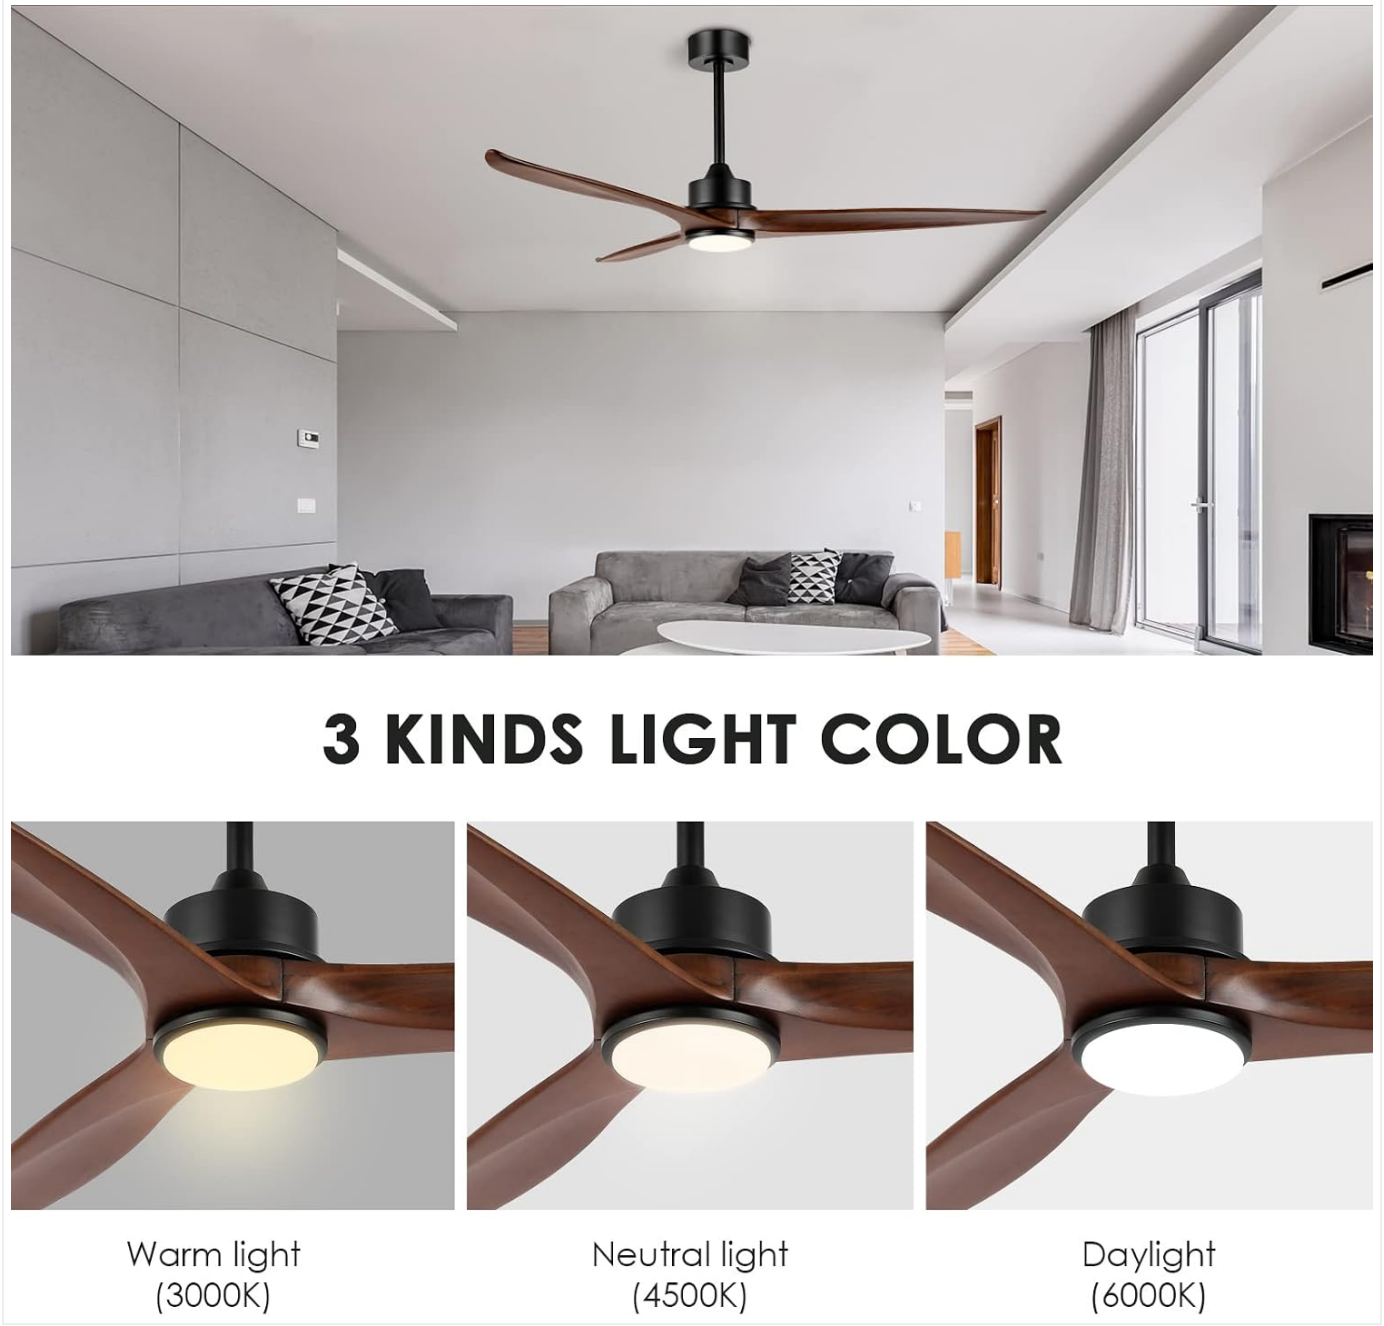


Figure 3: Three available light color temperatures for the integrated LED light kit.



Figure 4: Timer function for automatic fan shut-off.



Figure 5: Examples of suitable installation locations for the WINGBO ceiling fan.

Dimensions

The WINGBO 60 Inch DC Ceiling Fan has a diameter of 60 inches. Two downrods are included: 4.5 inches and 12 inches, allowing for flexible installation heights. The overall height of the fan varies between 14.15 inches and 21.65 inches depending on the downrod used. It is suitable for average room sizes of 20ft x 20ft or larger.

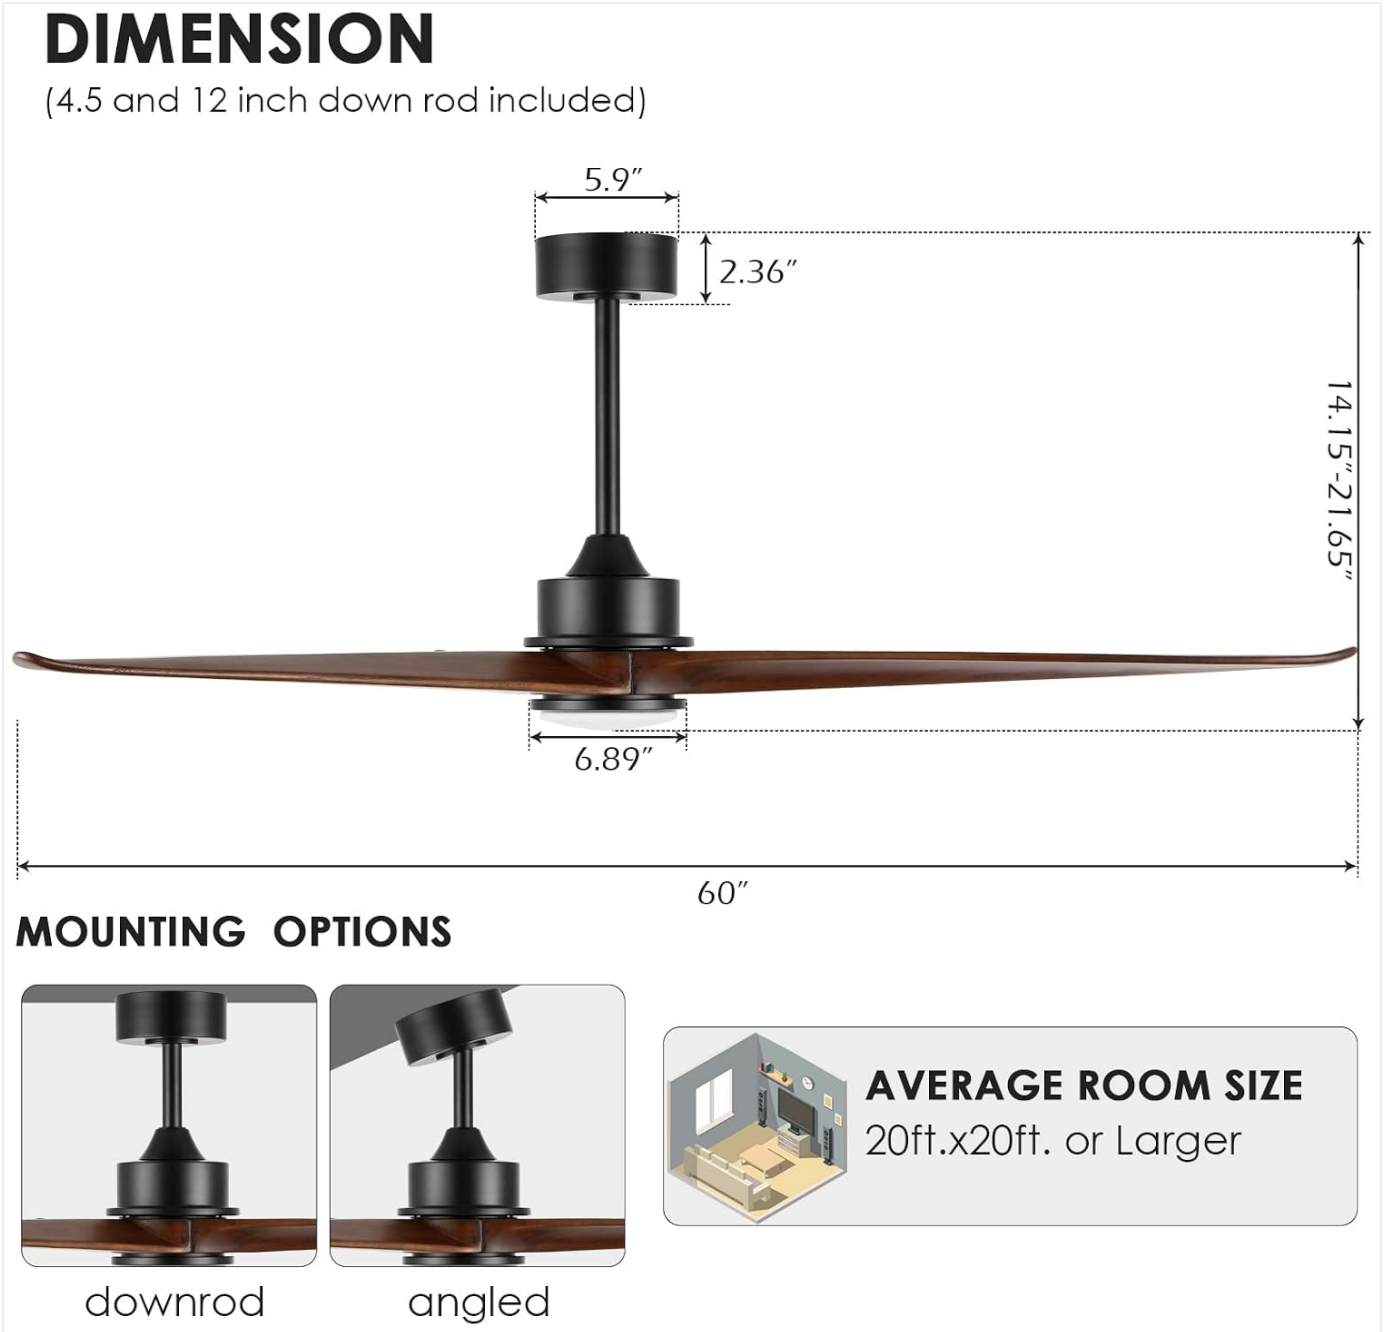


Figure 6: Detailed dimensions and mounting options for the ceiling fan.

Installation Guide

Follow these steps carefully for proper installation. It is recommended to have a second person assist during certain stages. Ensure power is off at the circuit breaker before starting.

1. **Step 1: Install Fan Mounting Bracket**

   Secure the fan mounting bracket to the ceiling junction box. Ensure it is firmly attached to a structural support capable of holding the fan's weight.

   [redacted]

   Video 2: Installation of the fan mounting bracket (0:10 - 0:12).

2. **Step 2: Attach Blades**

   Carefully attach the three carved wood blades to the motor assembly using the provided screws. Ensure each blade is securely fastened.



Video 3: Attaching the fan blades to the motor (0:13 - 0:25).

3. **Step 3: Install the Lighting**

   Connect the LED light wires to the corresponding wires from the fan motor. Secure the LED light assembly to the bottom of the fan motor housing.



Video 4: Installing and connecting the LED light kit (0:26 - 0:37).

4. **Step 4: Install Downrod**

   Select the appropriate downrod (4.5" or 12") for your ceiling height. Feed the fan wires through the downrod and secure the downrod to the fan motor assembly using the pin and screw.



Video 5: Assembling the downrod with the fan motor (0:38 - 1:13).

5. **Step 5: Connect the Wires (Fan to Receiver)**

   Connect the wires from the fan to the receiver module. Match the colors carefully: Grey (receiver) to Grey (fan), Red (receiver) to Red (fan), Yellow (receiver) to Yellow (fan), Blue (receiver) to Blue (fan), White (receiver) to White (fan).



Video 6: Connecting the fan wires to the receiver module (1:14 - 1:39).

6. **Step 6: Hang the Motor**

   Carefully lift the fan assembly and hang the downrod ball into the mounting bracket slot. Ensure it is seated correctly and securely.



Video 7: Hanging the fan motor assembly onto the mounting bracket (1:40 - 1:42).

7. **Step 7: Connect the Wires (Ceiling)**

   Connect the wires from the receiver to the ceiling electrical box. Match the colors: Black (receiver) to Hot (ceiling), White (receiver) to Neutral (ceiling), and Ground (ceiling) to Ground (receiver) and Ground (fan).



Video 8: Connecting the receiver wires to the ceiling electrical wiring (1:43 - 2:01).

8. **Step 8: Install Receiver Module**

   Carefully tuck the receiver module and all connected wires into the mounting bracket or ceiling box, ensuring no wires are pinched.



Video 9: Installing the receiver module into the ceiling bracket (2:02 - 2:05).

9. **Step 9: Attach the Canopy**

   Slide the canopy up the downrod and secure it to the mounting bracket with the provided screws. Ensure the canopy covers all wiring and the mounting bracket.



Video 10: Attaching the canopy to the ceiling mounting bracket (2:06 - 2:15).

10. **Step 10: Install the Light Globe**

    Twist or secure the light globe onto the LED light assembly at the bottom of the fan. Ensure it is properly seated and locked into place.

[redacted]

Video 11: Installing the light globe (2:16 - 2:19).

Operating Instructions

Your WINGBO ceiling fan is operated via the included remote control. Ensure the remote has fresh batteries installed.



Figure 7: Remote control layout for the WINGBO ceiling fan.

- **Fan Speed Control:** Use the numbered buttons (1-6) to adjust the fan speed. 1 is the lowest speed, 6 is the highest.
- **Light Control:** The light control button cycles through the three color temperatures (3000K, 4500K, 6000K) and turns the light on/off.

- **Reverse Function:** The "Follow/Reverse" button changes the direction of the fan blades, allowing for downdraft (summer) or updraft (winter) airflow.
- **Nature Mode:** Activates a natural breeze simulation by varying fan speeds.
- **Timer Function:** Use the 1H, 2H, 4H, 8H buttons to set the fan to automatically turn off after the selected duration.

Maintenance

- **Cleaning:** To clean the fan, wipe with a soft, damp cloth. Do not use abrasive cleaners or solvents. Ensure power is off before cleaning.
- **Blade Care:** The solid wood blades are resistant to warping. Periodically check that all blade screws are tight.
- **Light Source:** The integrated LED light source is designed for long life and typically does not require replacement.

Troubleshooting

Problem	Possible Cause	Solution
Fan does not start	No power to the fan; Loose wire connections; Remote control issues.	Check circuit breaker. Ensure all wire connections are secure. Replace remote control batteries.
Fan wobbles	Loose blade screws; Improperly balanced blades; Loose mounting bracket.	Tighten all blade screws. Use a balancing kit (not included) if necessary. Ensure mounting bracket is securely installed.
Light does not work	Loose wire connection; Faulty LED driver.	Check light wire connections. Contact customer support if LED driver is suspected faulty.
Remote control not working	Dead batteries; Remote not paired.	Replace batteries. Refer to remote control pairing instructions (if applicable, usually in a separate remote manual).

Specifications

- **Brand:** WINGBO
- **Model Name:** 60 Inch DC Ceiling Fan (SYCF6001)
- **Product Dimensions:** 60"D x 60"W x 21"H (with 12" downrod)
- **Item Weight:** 14.3 Pounds
- **Color:** Black and Walnut
- **Electric Fan Design:** Ceiling Fan
- **Power Source:** DC
- **Wattage:** 18 watts (LED Light)
- **Number of Blades:** 3
- **Blade Material:** Wood (FSC-Certified)
- **Switch Type:** Remote
- **Light Type:** LED (3000K/4500K/6000K)
- **Indoor/Outdoor Usage:** Indoor (Damp-rated)
- **Number of Power Levels:** 12 (6 forward, 6 reverse speeds)
- **Specification Met:** ETL

Warranty and Support

For warranty information or technical support, please contact WINGBO customer service. Keep your purchase receipt as proof of purchase. Contact details can typically be found on the product packaging or the official WINGBO website.

Online Support: Visit the official WINGBO website for FAQs and support resources.

Email Support: Refer to your product documentation for the customer service email address.

Phone Support: Refer to your product documentation for the customer service phone number.

© 2024 WINGBO. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B0B151RWPQ

More documents and user manuals: **https://manuals.plus/**