Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

Ramnnycetus X3

User Manual for Ramnnycetus Smart Video Wireless Camera Doorbell

Model: X3 | Brand: Ramnnycetus

1. Introduction

This manual provides comprehensive instructions for the installation, operation, and maintenance of your Ramnnycetus Smart Video Wireless Camera Doorbell (Model X3). This 3-in-1 device integrates doorbell, surveillance, and video capabilities, offering HD night vision and two-way communication for enhanced home security. It features easy installation and convenient app control.

Please read this manual thoroughly before using the product to ensure proper function and safety.

2. Product Overview

2.1 Package Contents

- Smart Video Wireless Camera Doorbell Unit
- Indoor Chime Unit
- Mounting Accessories (Screws, 3M Adhesive)
- USB Type-C Charging Cable
- User Manual (this document)

2.2 Key Features

- **Mobile Phone Video Call Function:** Receive calls directly on your smartphone when the doorbell is pressed.
- **Voice-Changing Intercom:** Enhance privacy and security during two-way communication.
- **Automatic Capture:** Records events automatically.
- **Long Standby Time:** Powered by a rechargeable lithium battery with low-power design.
- **Day and Night Vision:** Built-in high-power infrared night vision light for clear viewing in low light.
- **Adjustable Volume:** Customize chime volume to suit your environment.
- **Dual Connectivity:** Supports both Wi-Fi (2.4G only) and Bluetooth connections.
- **1080P Ultra Wide-Angle Lens:** Provides a broad field of view, minimizing blind spots around your door.



Image: The Smart Video Wireless Camera Doorbell unit and its accompanying indoor chime unit, along with a smartphone displaying the live video feed.

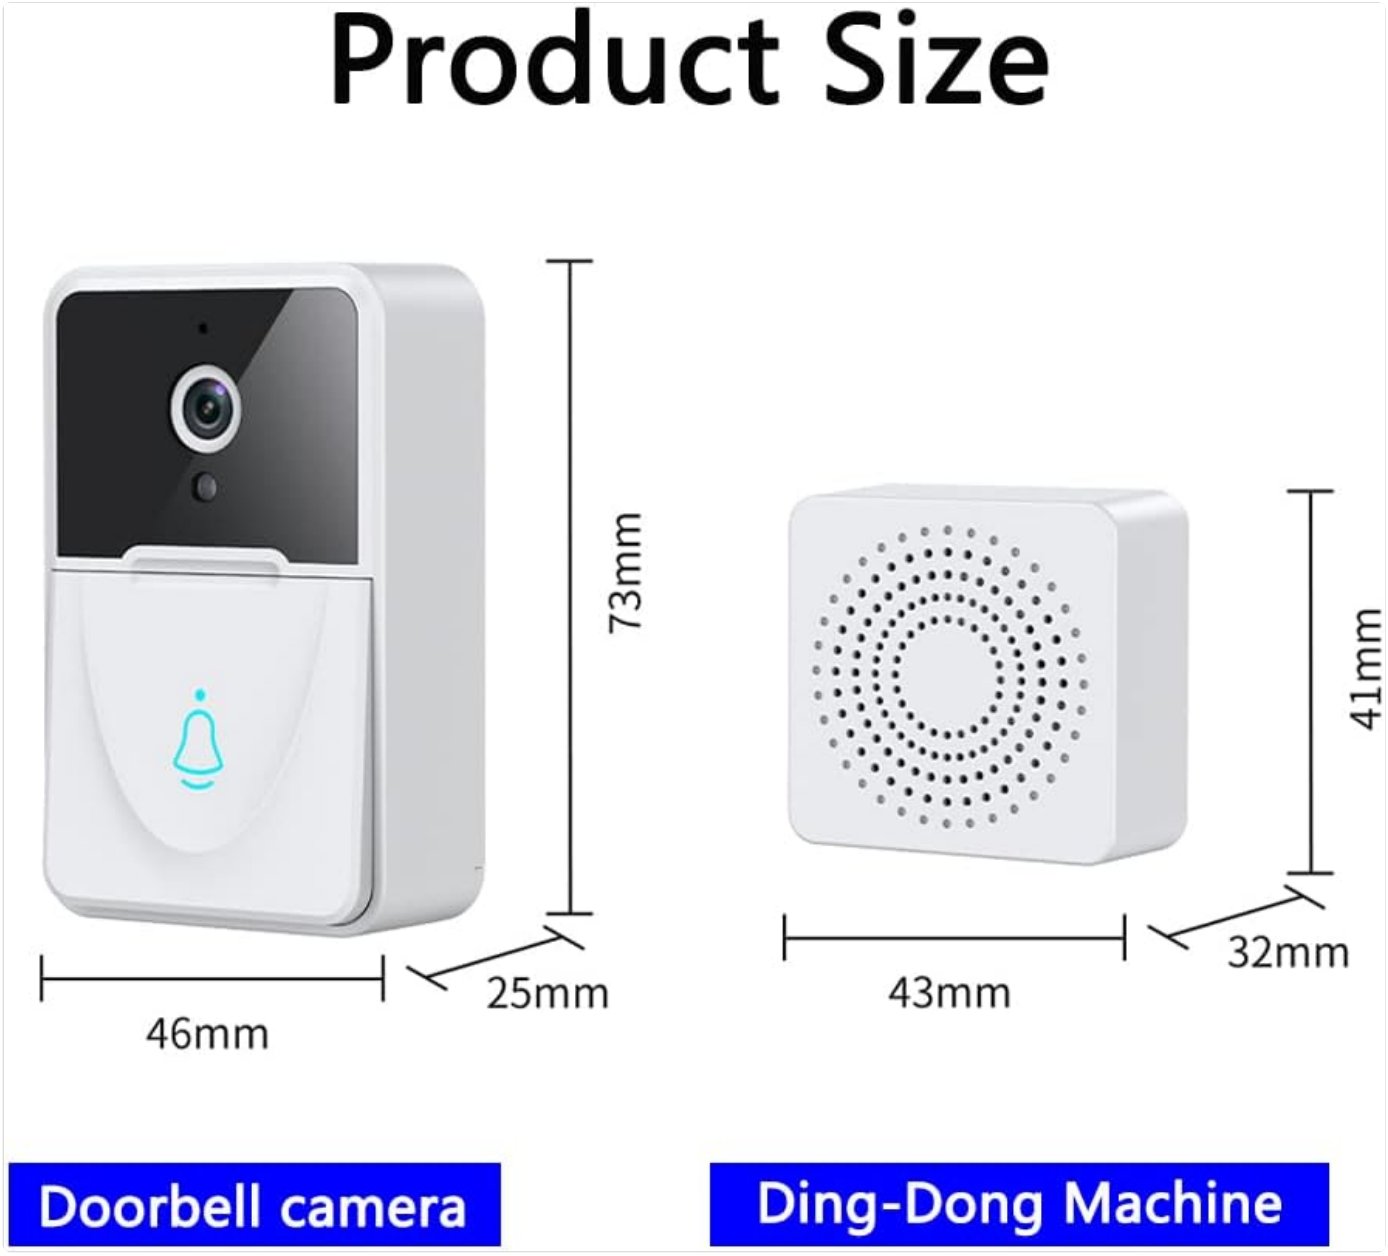


Image: Detailed dimensions of both the doorbell camera (46mm x 73mm x 25mm) and the ding-dong machine (43mm x 41mm x 32mm).

3. Setup and Installation

3.1 Initial Charging

Before first use, fully charge the doorbell unit using the provided USB Type-C charging cable. The charging port is designed for secure and leak-proof connection.

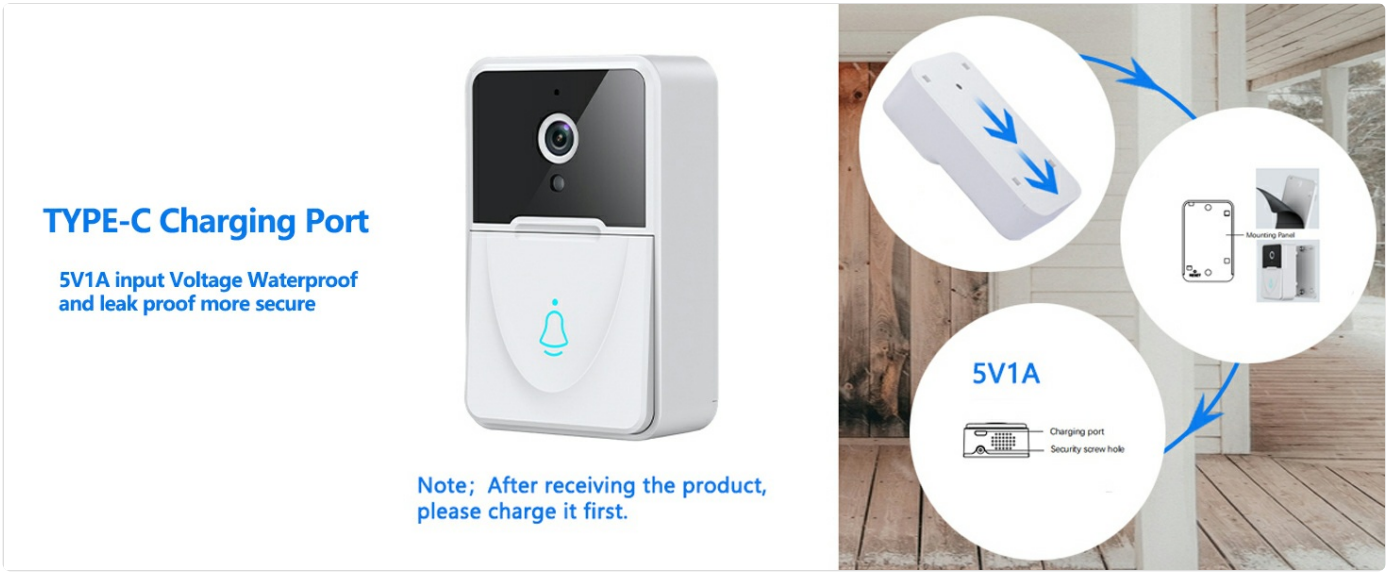


Image: Illustration of the Type-C charging port on the doorbell unit and a diagram showing the mounting plate attachment.

3.2 Installation Methods

The doorbell offers two convenient installation options:

- **Drilling Installation:** Use screws for a secure and permanent fixation.
- **No Drilling Installation:** Utilize the strong 3M adhesive paste for a quick and easy setup.

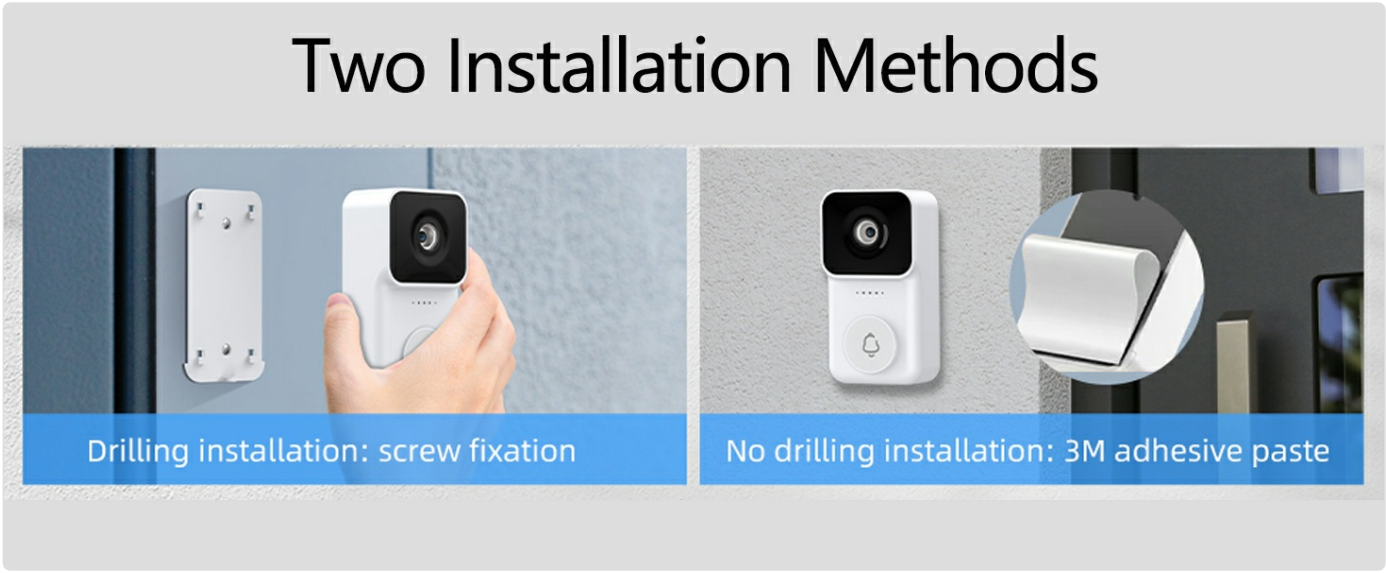


Image: Visual representation of the drilling installation method using screws and the no-drilling method using 3M adhesive.



Image: The doorbell unit mounted on a wall beside a door, showing its integration into a home environment.

3.3 App Connection

To utilize the smart features, download the doorbell camera APP. Compatible apps include "Graffiti" and "Smart Life", available on both the App Store and Google Play. Ensure your mobile phone and the doorbell are connected to a 2.4G Wi-Fi network. **Note: This device does not support 5G Wi-Fi.**

Follow the in-app instructions to bind the device. This typically involves entering your Wi-Fi password and scanning a QR code generated by the app with the doorbell camera.

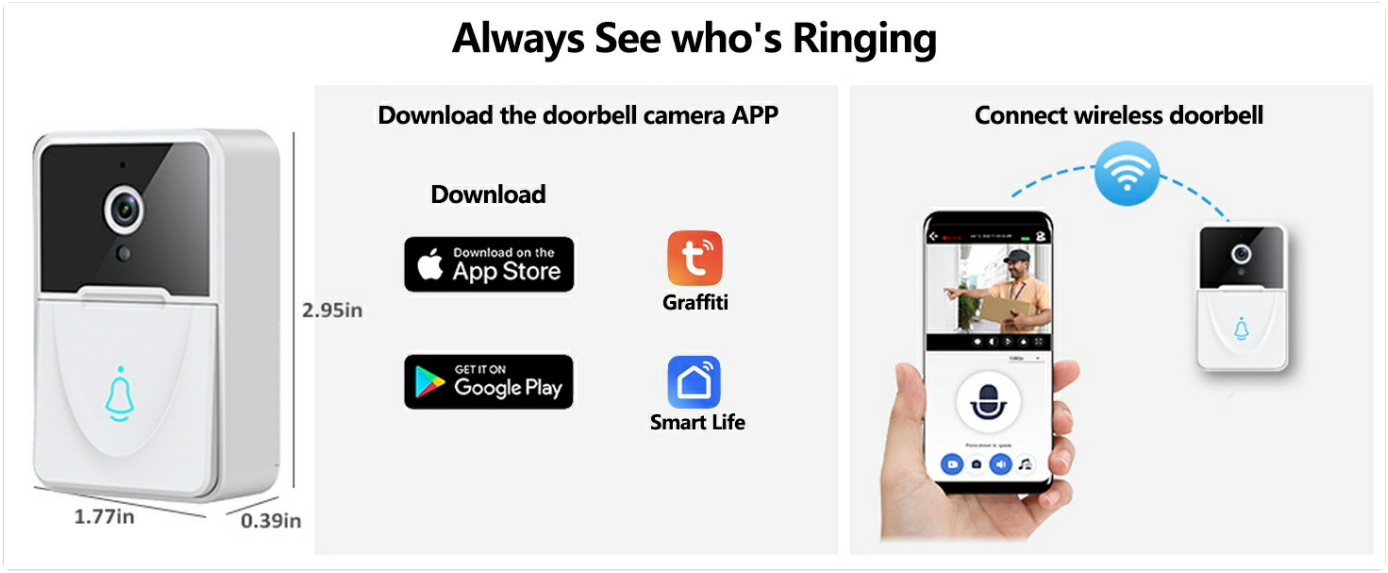


Image: Visual guide for downloading the doorbell camera app from App Store or Google Play, and connecting the wireless doorbell to a smartphone via Wi-Fi.

Video: Device Binding and Mobile Push Notification

Your browser does not support the video tag.

Video: This video demonstrates the process of binding the doorbell device to the mobile application, showing how to enter Wi-Fi details and confirm the connection. It also illustrates a visitor pressing the doorbell and the subsequent mobile push notification received on the smartphone, allowing for remote interaction.

4. Operation

4.1 Remote Video Call

When a visitor presses the doorbell, a push notification will be sent to your mobile phone. You can then enter the mobile phone video call interface to view the door in real-time and communicate with the visitor remotely.

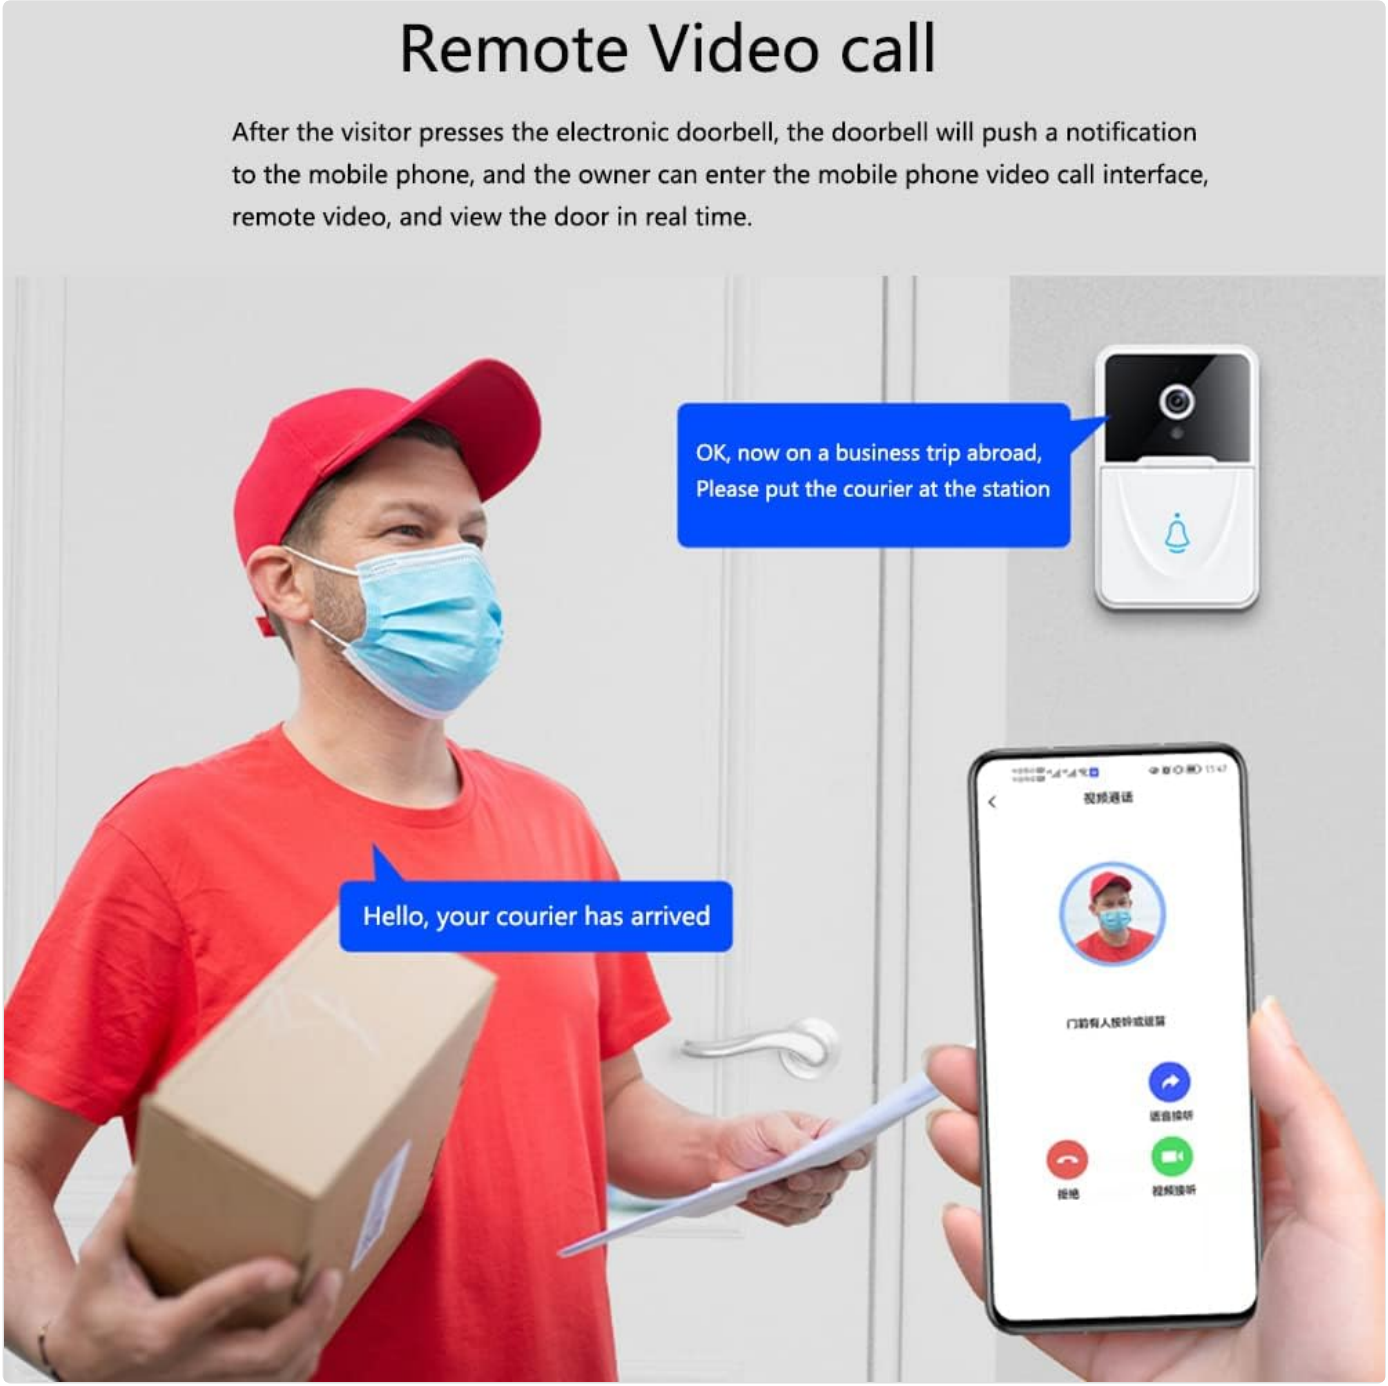


Image: A delivery person at the door and a smartphone displaying the remote video call interface, demonstrating how to communicate with visitors from anywhere.

4.2 Two-Way Audio and Voice Changing

The doorbell supports real-time two-way audio, allowing you to converse with visitors. The voice-changing feature provides an additional layer of security, enabling you to alter your voice during the intercom conversation.



Image: A person interacting with the doorbell via their smartphone, illustrating the real-time two-way audio communication.



Image: A person receiving a package, demonstrating the smart voice changing feature during an intercom conversation for added security.

4.3 Day and Night Function

The doorbell camera automatically switches between day and night modes. The built-in high-power infrared night vision light, combined with an ICR infrared filter, ensures clear visibility and image capture even in dark environments.



Image: Comparison showing clear visibility during the day and enhanced clarity at night using the doorbell's infrared night vision.

4.4 Viewing Visitor Records

Access recorded visitor events through the mobile application. The automatic capture feature ensures that interactions at your door are logged for review.

---

5. Maintenance

5.1 Battery Care

The doorbell is powered by a rechargeable lithium battery. To maximize battery life, ensure regular charging. The low-power design helps extend the time between charges.

5.2 Cleaning

To clean the doorbell unit, gently wipe it with a soft, dry cloth. Avoid using abrasive cleaners or solvents that could

damage the surface.

5.3 Water Resistance

The product has an International Protection Rating of IP65, meaning it is dust tight and protected against water jets from any angle. However, some user feedback indicates it may not be fully waterproof and advises caution for outdoor use, especially in heavy rain or direct water exposure. Consider installing it under a protective cover if exposed to harsh weather conditions.

---

6. Troubleshooting

If you encounter issues with your Smart Video Wireless Camera Doorbell, please refer to the following common problems and solutions:

Problem	Possible Cause / Solution
App not connecting or working	◦ Ensure your phone's Bluetooth is enabled, as some features or notifications may rely on it. ◦ Verify both the doorbell and your phone are connected to a**2.4G Wi-Fi network**. This device does not support 5G Wi-Fi. ◦ Check app permissions on your phone. ◦ Restart the app and the doorbell unit.
Doorbell does not ring or send notifications to chime/phone	◦ Ensure the indoor chime unit is powered on and paired with the doorbell. ◦ Check Wi-Fi signal strength at the doorbell's location. ◦ Verify app settings for notifications are enabled. ◦ If using a metal building, signal interference may occur. Consider relocating or using a Wi-Fi extender.
Only records when rung	◦ Check motion detection settings within the app. Ensure motion detection is enabled and sensitivity is adjusted appropriately.
Poor video quality or night vision	◦ Ensure the camera lens is clean and free from obstructions. ◦ Check Wi-Fi signal strength, as poor connectivity can affect video streaming quality. ◦ Verify the night vision mode is activating automatically in low light conditions.

---

7. Specifications

Feature	Detail
Brand	Ramnnycetus

Feature	Detail
Model Name	doorbell camera (X3)
Indoor/Outdoor Usage	Outdoor
Compatible Devices	Smartphone
Power Source	Battery Powered (1 Lithium Ion battery included)
Connectivity Protocol	Bluetooth, Wi-Fi (2.4G only)
Controller Type	Amazon Alexa (via app integration)
Video Capture Resolution	720p
Color	X3 white
Number of Channels	2
Installation Type	Screw In, Self Adhesive
Night Vision Range	10 Meters
Frame Rate	30 frames_per_second
Material	Plastic
Voltage	5 Volts
Wattage	1 watts
Item Dimensions (L x W x H)	1.8 x 1 x 2.8 inches
Water Resistance Level	IP65 (Dust tight, protected against water jets) - *Note: See Maintenance section for important considerations.*
Focus Type	Auto Focus
Low Light Technology	Starlight
Alert Type	Audio and Motion
Video Capture Format	MP4
Item Weight	4.2 ounces
UPC	714216925834
Date First Available	September 20, 2022
Special Feature	2-Way Audio

8. Warranty and Support

For specific warranty information regarding your Ramnnycetus Smart Video Wireless Camera Doorbell, please refer to the

product packaging or contact the seller directly. Warranty terms and conditions may vary.

For technical support or further assistance, please reach out to Ramnnycetus customer service channels as provided at the point of purchase or on the official brand website.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B0B1PDVSFJ

More documents and user manuals: **https://manuals.plus/**