

[Manuals.plus](#) /

› [Portronics](#) /

› Portronics Breeze 4 Portable Bluetooth Speaker User Manual

Portronics POR-1587

Portronics Breeze 4 Portable Bluetooth Speaker User Manual

Model: POR-1587 | Brand: Portronics

INTRODUCTION

Thank you for choosing the Portronics Breeze 4 Portable Bluetooth Speaker. This manual provides detailed instructions on how to set up, operate, and maintain your speaker to ensure optimal performance and longevity. The Breeze 4 is a compact and powerful 5W Bluetooth speaker featuring TWS connectivity, IPX6 water resistance, a built-in microphone, and up to 8 hours of playback.

WHAT'S IN THE BOX

- Bluetooth Speaker (1N)
- Charging Cable (1N)
- User Manual (1N)

SETUP GUIDE

1. Charging the Speaker

Before first use, fully charge your Portronics Breeze 4 speaker.

1. Locate the Type-C charging slot on the speaker.
2. Connect the provided Type-C charging cable to the speaker and the other end to a compatible USB power adapter (not included).
3. The charging indicator light will illuminate. A full charge takes approximately 8 hours.
4. Once fully charged, the indicator light will change or turn off, depending on the model.

Type C Charging Slot

Speed up the charging process with the Type-C charging slot.



Type-C Charging Slot

Image: The Type-C charging slot on the Portronics Breeze 4 speaker, designed for quick and convenient charging.

2. Powering On/Off

1. To power on, press and hold the power button for a few seconds until you hear an audible prompt or see the indicator light.
2. To power off, press and hold the power button again until the speaker shuts down.

3. Bluetooth Pairing

Connect your Breeze 4 speaker to your smartphone, tablet, or laptop via Bluetooth.

1. Ensure the speaker is powered on and in pairing mode (indicated by a blinking LED).
2. On your device, go to Bluetooth settings and search for available devices.
3. Select "Portronics Breeze 4" from the list.
4. Once connected, the speaker will provide an audible confirmation, and the LED will stop blinking.

Bluetooth Connectivity

Connect any bluetooth device seamlessly.



Image: The Portronics Breeze 4 speaker seamlessly connecting to various Bluetooth-enabled devices like laptops and smartphones.

4. True Wireless Stereo (TWS) Connectivity

Enhance your audio experience by connecting two Breeze 4 speakers for a powerful 10W stereo sound.

1. Ensure both Breeze 4 speakers are powered on and not connected to any other Bluetooth device.
2. On one speaker (this will be the primary speaker), double-press the power button or a dedicated TWS button (if available, refer to speaker markings).
3. The speakers will automatically search and pair with each other. You will hear a confirmation tone once connected.
4. Now, connect your device to the primary speaker via Bluetooth as described in step 3. Both speakers will play audio in stereo.

Double Up, Now In True Wireless Stereo

Connect two Breeze 4 speakers together through TWS for better sound quality.



Image: Two Portronics Breeze 4 speakers demonstrating True Wireless Stereo (TWS) connectivity, providing an immersive audio experience.

OPERATING INSTRUCTIONS

Basic Controls

- **Play/Pause:** Press the Play/Pause button (often marked with a triangle or circle) once to play or pause music.
- **Volume Up:** Press the '+' button to increase volume.
- **Volume Down:** Press the '-' button to decrease volume.
- **Next Track:** Long press the '+' button to skip to the next track.
- **Previous Track:** Long press the '-' button to go to the previous track.

Call Handling (Built-in Microphone)

The Breeze 4 features a built-in microphone for hands-free calling.

- **Answer Call:** Press the Play/Pause button once when a call comes in.
- **End Call:** Press the Play/Pause button once during a call to end it.
- **Reject Call:** Long press the Play/Pause button to reject an incoming call.

KEY FEATURES

- **Portable Design:** Compact and lightweight (190 grams) for easy portability.
- **5W Audio Output:** Delivers impactful and clear sound.



Image: An exploded view illustrating the impactful 5W audio output of the Portronics Breeze 4 speaker, designed for louder and clearer sound.

- **Long Playback Time:** Up to 8 hours of continuous music playback on a single charge with its 2000 mAh battery.

Non Stop Playback

Enjoy uninterrupted music Upto 8 hours
of powerful audio playback.



Image: The Portronics Breeze 4 speaker highlighting its non-stop playback capability of up to 8 hours, powered by a 2000 mAh battery.

- **IPX6 Water Resistance:** Designed to withstand splashes and light rain, making it suitable for outdoor use.

IPX6 Water Resistant Body

No more worrying about water damage with the water-resistant body.



Image: The Portronics Breeze 4 speaker showcasing its IPX6 water-resistant body, providing durability against water damage.

- **Soft Cloth Mesh:** Features a super elastic cloth mesh that filters sharp noise from the sound cavity, ensuring clear audio.

Soft Cloth Mesh Filter Noise

The super elastic cloth mesh filters the sharp noise
of the sound cavity.

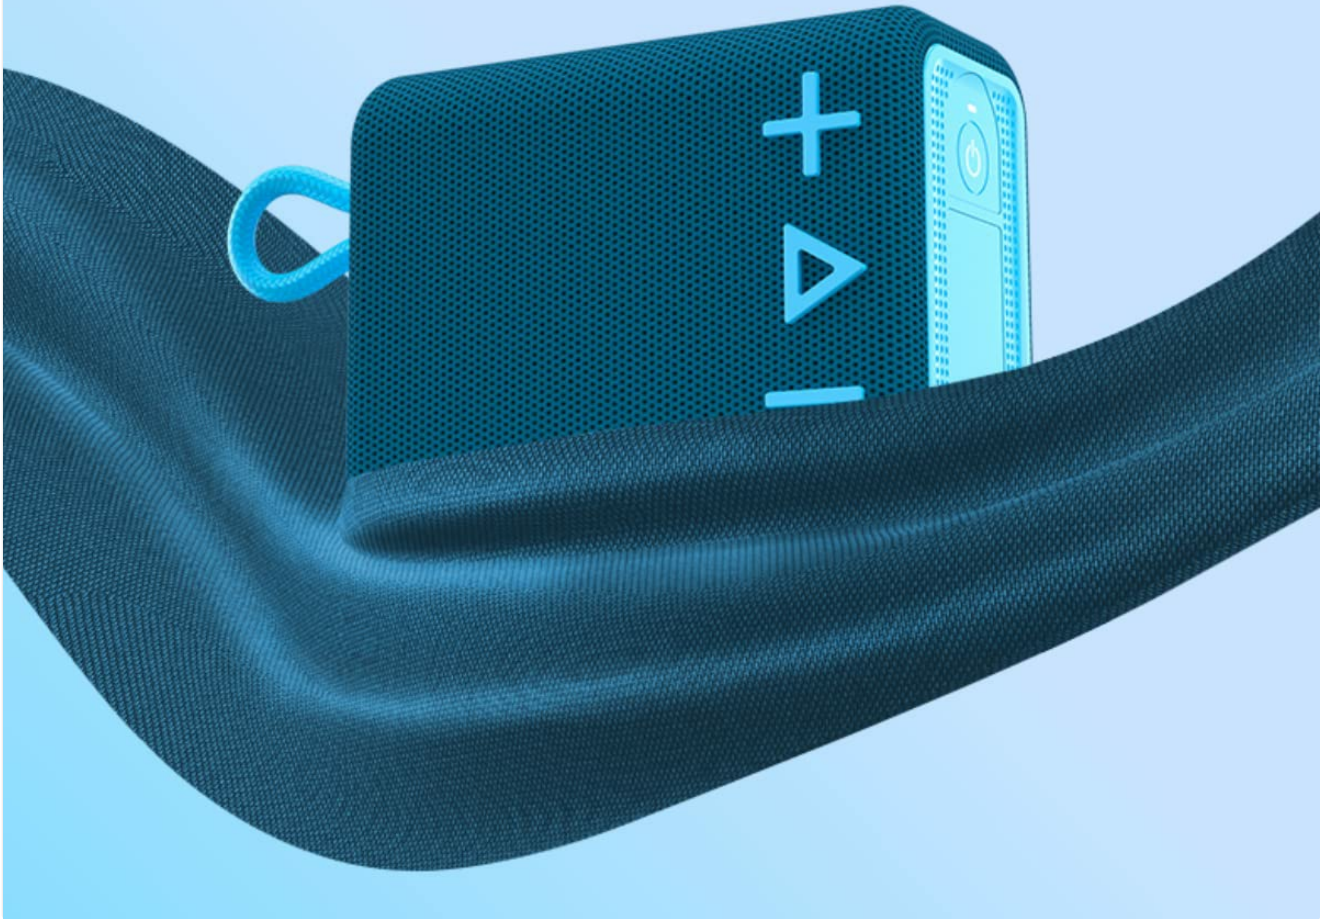


Image: A detailed view of the soft cloth mesh on the Portronics Breeze 4 speaker, designed to filter noise and enhance sound clarity.

MAINTENANCE

- **Cleaning:** Use a soft, dry cloth to wipe the speaker. Do not use abrasive cleaners or solvents.
- **Water Resistance:** While IPX6 rated, avoid submerging the speaker in water. Ensure the charging port cover is securely closed when near water.
- **Storage:** Store the speaker in a cool, dry place away from direct sunlight and extreme temperatures.
- **Battery Care:** To prolong battery life, avoid fully discharging the battery frequently. Charge the speaker regularly, even if not in use for extended periods.

TROUBLESHOOTING

Problem	Possible Cause	Solution
---------	----------------	----------

Problem	Possible Cause	Solution
Speaker does not power on.	Low battery; Power button not pressed correctly.	Charge the speaker fully. Press and hold the power button for 3-5 seconds.
Cannot pair with Bluetooth device.	Speaker not in pairing mode; Device Bluetooth off; Too far from device.	Ensure speaker is in pairing mode (blinking LED). Turn on Bluetooth on your device. Move speaker closer to device (within 10 meters).
No sound or low volume.	Volume too low on speaker or device; Speaker not connected.	Increase volume on both speaker and connected device. Re-pair the speaker with your device.
TWS pairing failed.	Speakers already connected to another device; Incorrect pairing procedure.	Disconnect both speakers from any devices. Ensure both are powered on and follow TWS pairing steps precisely.

SPECIFICATIONS

Feature	Detail
Model Name	Breeze 4
Model Number	POR-1587
Speaker Type	Portable Bluetooth Speaker
Audio Output Power	5 Watts
Bluetooth Version	5.3
Battery Capacity	2000 mAh
Playback Time	Up to 8 Hours
Charging Time	Approx. 8 Hours
Charging Port	Type-C
Water Resistance	IPX6
Built-in Microphone	Yes
TWS Connectivity	Yes
Item Weight	190 Grams
Product Dimensions	13D x 6W x 11H Centimeters
Country of Origin	China

WARRANTY AND SUPPORT

The Portronics Breeze 4 Portable Bluetooth Speaker comes with a **1-year manufacturer's warranty** from the date of purchase. This warranty covers manufacturing defects. Please retain your purchase receipt for warranty claims. For any support, queries, or warranty claims, please contact Portronics customer service.

- **Manufacturer Contact:** Portronics, 9555-245-245 (as per product specifications)
- Visit the official Portronics website for further assistance and contact information.

IMPORTANT NOTES

- Do not expose the speaker to extreme temperatures or direct sunlight for prolonged periods.
- Avoid dropping or subjecting the speaker to strong impacts.
- Use only the provided charging cable or a certified Type-C cable for charging.
- This product is designed for use with smartphones and tablets.

OFFICIAL PRODUCT VIDEOS

No official product videos from the seller were found in the provided data. Please refer to the text descriptions and images for product information.

