

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

- › [WALI](#) /
- › [WALI Triple Monitor Stand \(GMF003\) Instruction Manual](#)

WALI GMF003

WALI Triple Monitor Stand (GMF003) Instruction Manual

Model: GMF003

INTRODUCTION

Thank you for choosing the WALI Triple Monitor Stand (GMF003). This manual provides detailed instructions for the safe and efficient installation, operation, and maintenance of your monitor stand. Please read this manual thoroughly before assembly and retain it for future reference.

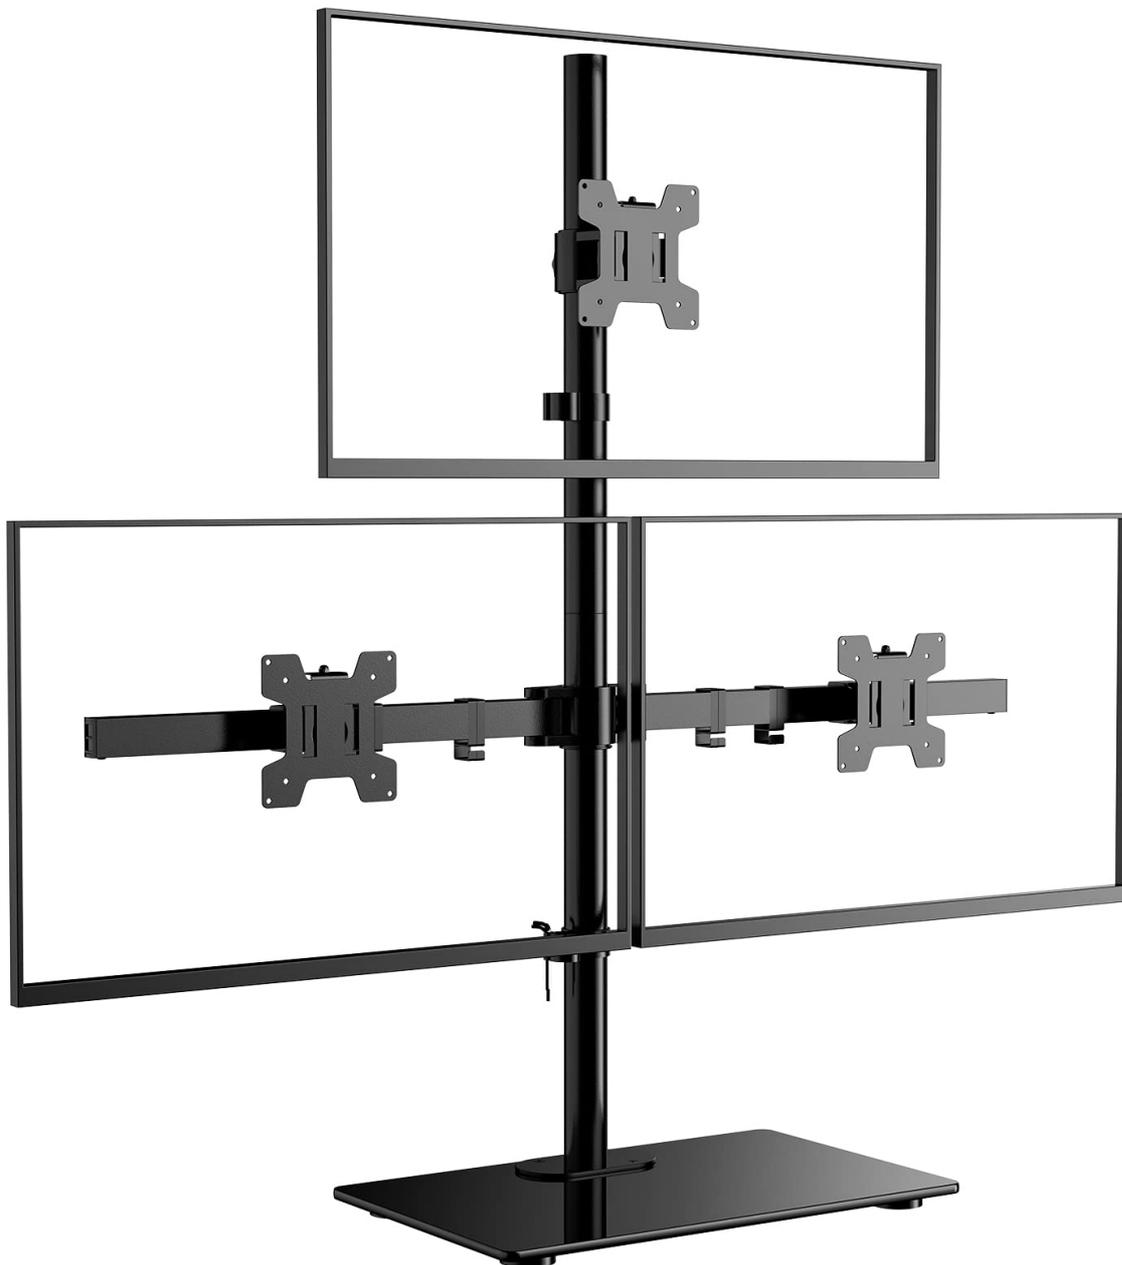


Figure 1: WALI Triple Monitor Stand (GMF003) with three monitors.

SAFETY INFORMATION

Please ensure all instructions are read and understood before installation and use. If you have any doubts regarding any part of this installation, please contact customer support. This product is designed for indoor use only. Improper installation or use may cause damage or serious injury. Do not exceed the weight capacity of 22 lbs (10 kg) per arm. Ensure the mounting surface can safely support the combined weight of the equipment and all attached hardware.

PACKAGE CONTENTS


The package includes the following items:

- 1 x WALI Free-standing Triple Monitor Mount (Black)
- 1 x Mounting Hardware Kit
- 1 x User Manual

SPECIFICATIONS

Brand	WALI
Model Number	GMF003
Mounting Type	Tabletop Mount (Free-standing or Grommet)
Movement Type	Articulating
Compatible Devices	Monitors
Maximum Screen Size	27 inches per screen
Weight Capacity	22 lbs (10 kg) per arm
VESA Compatibility	75x75mm, 100x100mm
Maximum Tilt Angle	90 Degrees
Color	Black
Material	Metal
Item Weight	13.59 pounds
Package Dimensions	17.6 x 12.8 x 3.62 inches

Display Compatibility

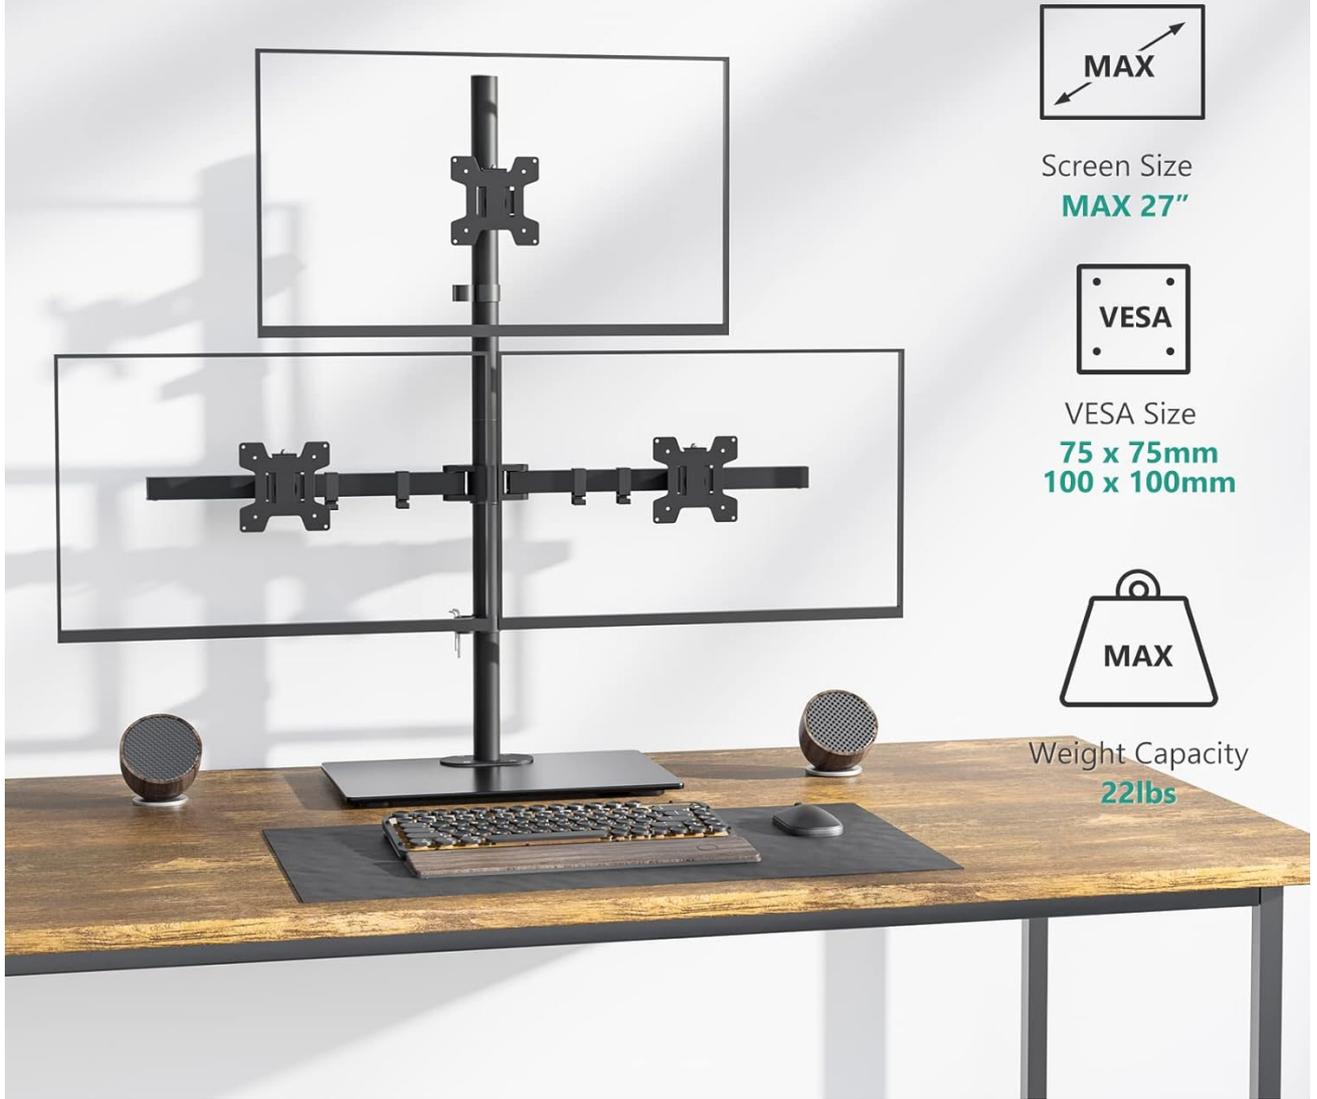

Screen Size
MAX 27"



VESA Size
**75 x 75mm
100 x 100mm**



Weight Capacity
22lbs

Figure 2: Display compatibility details including screen size, VESA, and weight capacity.

Product Dimension

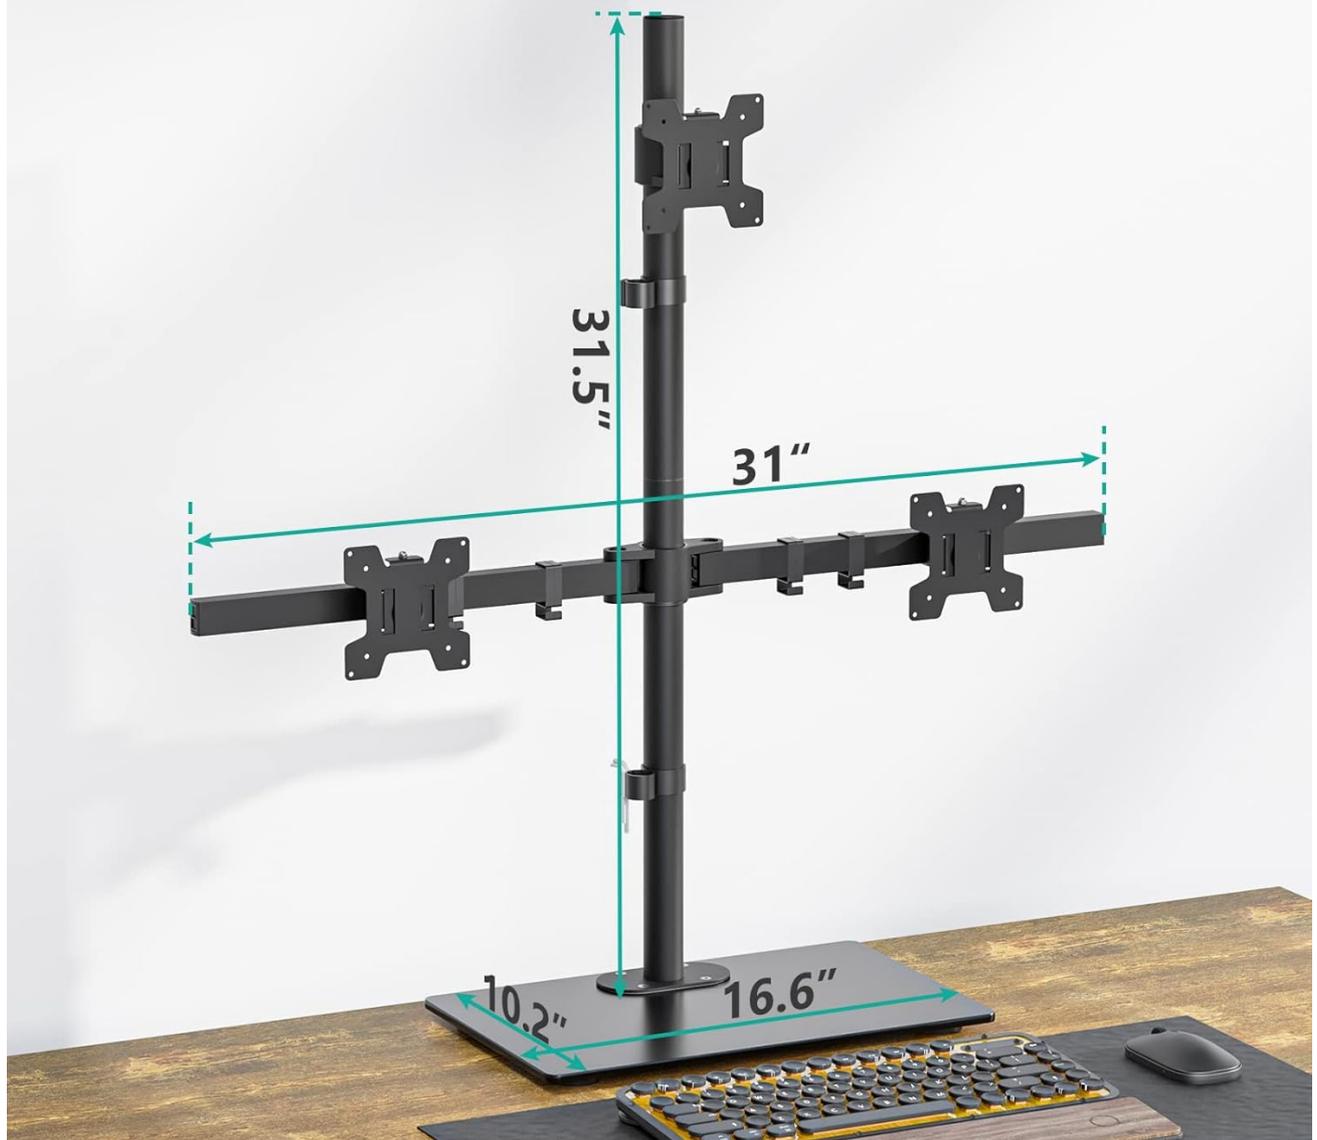


Figure 3: Overall product dimensions of the WALI Triple Monitor Stand.

INSTALLATION

Follow these steps to assemble and install your WALI Triple Monitor Stand. Refer to the included mounting hardware kit for specific components.

1. **Attach Base Feet:** Secure the rubber feet to the bottom of the weighted base to prevent scratching and ensure stability.
2. **Assemble Pole to Base:** Attach the main pole to the weighted base using the provided screws and Allen key. Ensure it is tightened securely.
3. **Install Horizontal Arms:** Slide the horizontal arm assembly onto the main pole. Secure it at the desired height using the locking mechanism.
4. **Install Top Monitor Arm:** Slide the single monitor arm for the top display onto the main pole above the horizontal arms. Secure it at the desired height.
5. **Attach VESA Plates to Monitors:** Screw the VESA mounting plates onto the back of each monitor. Ensure the screws are appropriate for your monitor's VESA pattern (75x75mm or 100x100mm).

6. **Mount Monitors:** Carefully slide the monitors (with VESA plates attached) onto the arms. Ensure they are securely seated.

The stand offers installation flexibility with both a weighted base for free-standing use and a grommet base option for desks with a suitable hole (0.4" - 3" thickness).

Installation Flexibility

Weighted Base



Grommet Base



Figure 4: The stand can be used with a weighted base or a grommet base for varied desk setups.

Installation Video Guide

Your browser does not support the video tag.

Video 1: Official WALI installation guide for the GMF003 Triple Monitor Stand, demonstrating assembly steps.

OPERATING AND ADJUSTMENTS

The WALI GMF003 stand allows for various adjustments to achieve an ergonomic setup and optimize your viewing experience.

- **Height Adjustment:** The monitors can be adjusted vertically along the main pole to your preferred viewing height. Loosen the locking mechanism, slide the arms to the desired position, and re-tighten.

- **Tilt:** Each monitor can be tilted up to +/- 90 degrees to reduce glare and find the optimal viewing angle.
- **Swivel:** Monitors can swivel +/- 90 degrees horizontally, allowing for flexible screen positioning.
- **Rotation:** Rotate monitors 360 degrees for landscape or portrait orientation.
- **Arm Slide:** Mounting holes parts can slide left and right on each arm, making it easier for monitors of different sizes to move side by side for perfect alignment.

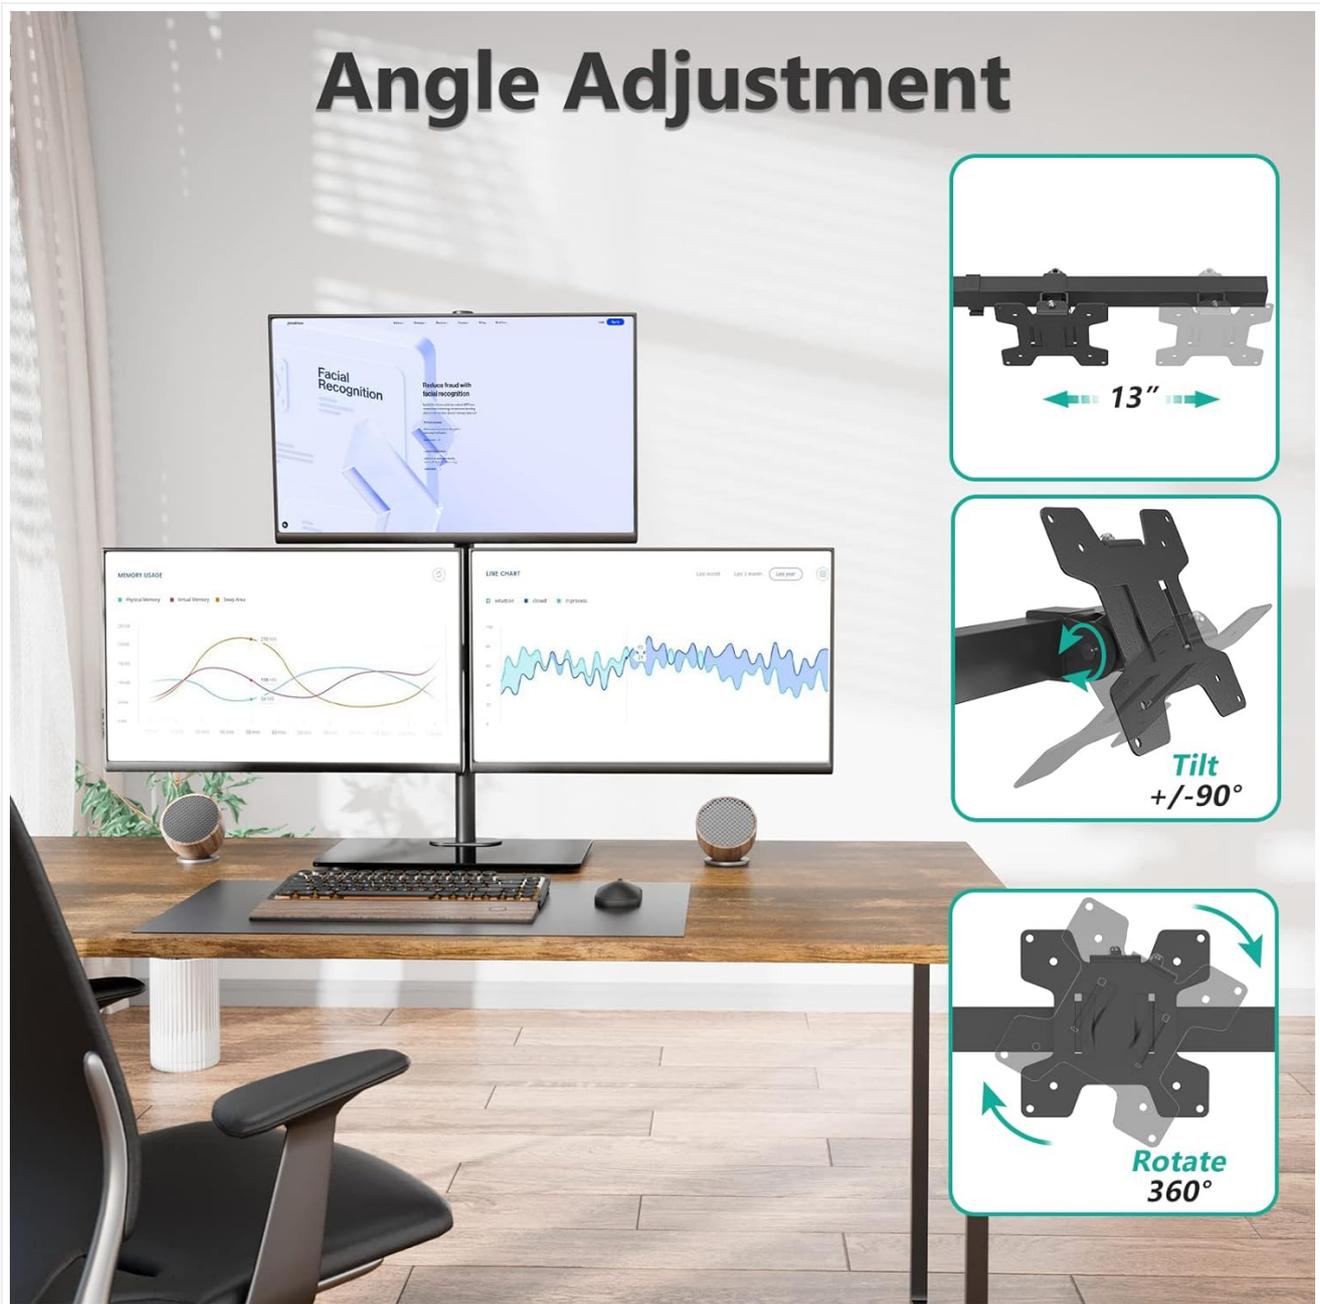


Figure 5: Illustration of tilt, swivel, and rotation adjustments for individual monitors.

CABLE MANAGEMENT

Integrated cable management clips are provided to keep your workspace tidy and organized. Route monitor cables through these clips along the arms and down the main pole to reduce clutter.

Clean Cable Management



Figure 6: Example of cables routed through the integrated cable management system.

MAINTENANCE

To ensure the longevity and proper function of your monitor stand:

- Regularly check all screws and connections to ensure they remain tight.
- Clean the stand with a soft, dry cloth. Avoid abrasive cleaners or solvents.
- Do not hang objects from the monitor arms or pole.

TROUBLESHOOTING

If you encounter any issues with your WALI Triple Monitor Stand, refer to the following common solutions:

- **Monitors are not level:** Ensure all VESA plates are securely attached and the horizontal arms are level. Adjust individual monitor tilt and rotation as needed.
- **Stand feels unstable:** Verify that the base is placed on a flat, stable surface. Re-tighten all connection points, especially the pole to the base. Ensure monitors do not exceed the weight capacity.

- **Difficulty adjusting monitor position:** Check if all locking mechanisms are sufficiently loosened before attempting to adjust. Re-tighten after adjustment.

For further assistance, please contact WALI customer support.

WARRANTY AND SUPPORT

WALI provides experienced and friendly US-based customer support available to assist 7 days a week. For warranty information or technical support, please refer to the contact details provided in your product packaging or visit the official WALI website.