



[Manuals.plus](#) /

› [Zunate](#) /

› Zunate KX-T076CID Corded Telephone User Manual

## Zunate KX-T076CID

# Zunate KX-T076CID Corded Telephone User Manual

Model: KX-T076CID

## INTRODUCTION

This manual provides detailed instructions for the setup, operation, and maintenance of your Zunate KX-T076CID Corded Telephone. This wired desk phone is designed for ease of use in various environments, including homes, offices, hotels, and call centers. It features caller ID display, call storage, and essential call management functions.

The Zunate KX-T076CID operates without external power or batteries, drawing all necessary power directly from the telephone line. Its robust design ensures durability and includes anti-thunder and anti-interference capabilities.

## PACKAGE CONTENTS

Before proceeding with the setup, please ensure all items listed below are present in your package:

- 1 x Zunate KX-T076CID Corded Telephone Unit
- 1 x Handset
- 1 x Coiled Handset Cord
- 1 x Telephone Line Cord (Standard)
- 1 x Telephone Line Cord (UK Plug, if applicable)
- 1 x User Manual

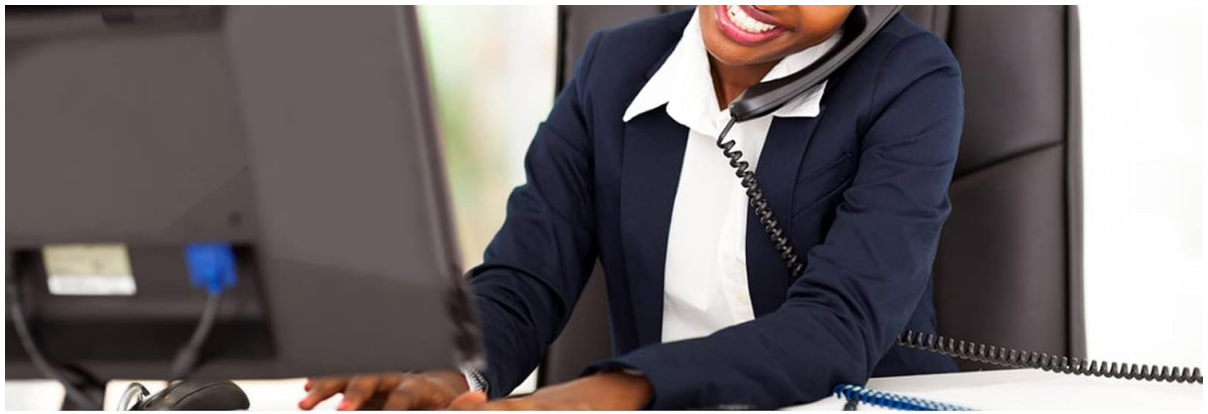


Figure 1: Package Contents. The image displays the main telephone unit, the handset, a coiled cord connecting the handset to the base, and two separate telephone line cords.

## SETUP INSTRUCTIONS

The Zunate KX-T076CID telephone is designed for simple plug-and-play installation. Follow these steps to set up your phone:

1. **Connect the Handset:** Plug one end of the coiled handset cord into the port on the side of the telephone base unit and the other end into the port on the handset.
2. **Connect to Telephone Line:** Locate the telephone line port on the back or side of the telephone base unit. Plug one end of the telephone line cord into this port and the other end into your wall telephone jack.
3. **Placement:** Place the telephone on a flat, stable surface such as a desk. The non-slip base ensures stability. For wall mounting, use the integrated wall mount slots on the base (mounting hardware not included).
4. **Initial Check:** Lift the handset. You should hear a dial tone, indicating the phone is ready for use.



## Corded Phones for Landline

30 groups of 12 digits call storage function  
10 groups of 12 digits number dialing and call time recording



Figure 2: Telephone Unit Assembly. This image shows the main telephone unit with the handset connected via its coiled cord, positioned on a flat surface.

## OPERATING INSTRUCTIONS

This section details the various functions and operations of your Zunate KX-T076CID telephone.

### Making a Call

1. Lift the handset.
2. Listen for a dial tone.
3. Dial the desired telephone number using the keypad.
4. Wait for the call to connect.
5. To end the call, replace the handset on the base.



Figure 3: Keypad Layout. This image provides a detailed view of the telephone's keypad, showing all numerical and function buttons.

## Receiving a Call

1. When the phone rings, lift the handset to answer.
2. To end the call, replace the handset on the base.

## Caller ID Display

The telephone features a Caller ID display. When an incoming call is received, the caller's number (if available) will be shown on the LCD screen.

- **UP/DOWN Buttons:** Use the **UP** and **DOWN** buttons to scroll through the list of incoming calls.
- **OUT Button:** Press the **OUT** button to view outgoing call records.

## Call Memory and Redial

The phone stores call records for convenient access:

- **Incoming Call Memory:** Stores up to 30 groups of 12-digit incoming call numbers.
- **Outgoing Call Memory:** Stores up to 10 groups of 12-digit outgoing call numbers with call time recording.
- **Redial:** To redial the last dialed number, lift the handset and press the **REDIAL** button.

- **Recall/Callback:** Use the stored numbers to recall or call back previous callers. Navigate using the UP/DOWN buttons and then dial.

## Other Functions

- **HOLD:** Press the **HOLD** button during a call to put the caller on hold. Press again to resume.
- **DEL (Delete):** Used to delete call records from memory.
- **SET/FL:** This button may be used for setting date/time or flash function depending on your telephone system. Refer to specific local telephone service instructions if needed.
- **Anti-Interference:** The phone is designed with anti-interference features to ensure clear communication.

## MAINTENANCE

To ensure the longevity and optimal performance of your Zunate KX-T076CID telephone, follow these maintenance guidelines:

- **Cleaning:** Wipe the phone's surface with a soft, damp cloth. Do not use harsh chemicals, abrasive cleaners, or excessive moisture.
- **Environment:** Keep the phone away from direct sunlight, excessive heat, humidity, and dust.
- **Cords:** Periodically check the telephone line cord and handset coiled cord for any signs of wear or damage. Replace if necessary.
- **Avoid Drops:** Handle the phone with care to prevent damage from accidental drops.

## TROUBLESHOOTING

If you encounter issues with your Zunate KX-T076CID telephone, please refer to the following common troubleshooting steps:

| Problem                      | Possible Cause / Solution  |
|------------------------------|--|
| No dial tone                 | <ul style="list-style-type: none"> <li>◦ Ensure the telephone line cord is securely plugged into both the phone and the wall jack.</li> <li>◦ Test with another working phone or a different wall jack to rule out line issues.</li> <li>◦ Check if the handset cord is properly connected.</li> </ul> |
| Caller ID not displaying     | <ul style="list-style-type: none"> <li>◦ Verify that you have Caller ID service activated with your telephone service provider.</li> <li>◦ Ensure the phone is connected to a compatible telephone line.</li> </ul>  |
| Cannot make or receive calls | <ul style="list-style-type: none"> <li>◦ Check all cable connections as described in the "Setup Instructions".</li> <li>◦ Confirm that your telephone line service is active.</li> </ul>   |
| Buttons not responding       | <ul style="list-style-type: none"> <li>◦ Ensure the phone is not in a "HOLD" state.</li> <li>◦ Briefly disconnect and reconnect the telephone line cord to reset the unit.</li> </ul>  |

If the problem persists after trying these steps, please contact customer support.

## SPECIFICATIONS

| Feature              | Detail  |
|----------------------|---|
| Model                | KX-T076CID  |
| Brand                | Zunate  |
| Type                 | Corded Desk/Wall Mount Telephone  |
| Material             | ABS   |
| Color                | White   |
| Power Source         | Telephone Line Powered (No external power or batteries required)            |
| Caller ID            | Yes   |
| Incoming Call Memory | 30 groups (12 digits)   |
| Outgoing Call Memory | 10 groups (12 digits) with call time recording                              |
| Functions            | Dialing, Cancel, Redial, Hold, Caller ID Query (Up/Down), Anti-interference |
| Applicable Scene     | Home, Hotel, Office, Bank, Call Center, etc.                                |

## WARRANTY AND SUPPORT

**Warranty Information:** Specific warranty details for the Zunate KX-T076CID telephone are not provided in this manual. Please refer to the warranty card included with your product or contact the retailer/manufacturer for warranty terms and conditions.

**Customer Support:** For technical assistance, troubleshooting beyond this manual, or inquiries regarding your product, please contact Zunate customer support through their official website or the contact information provided at the point of purchase.

**Software Updates:** Information regarding software updates for this device is not available.

**Spare Parts:** Information regarding the availability of spare parts for this device is not available.