

BYL SE05P

# Bestisan Soundbar User Manual

Model: SE05P | Brand: BYL

**Important: Please read this manual carefully before operating your soundbar.**

## 1. PRODUCT OVERVIEW

The Bestisan SE05P Soundbar is designed to enhance your home audio experience with powerful sound and versatile connectivity options. It features four full-range speakers, 80W peak power, and three distinct equalizer modes to optimize audio for movies, music, and dialogue.



Image: The Bestisan SE05P Soundbar shown with its included remote control, highlighting its sleek black design.

## 2. WHAT'S IN THE BOX

Upon unboxing, please verify that all components listed below are present:

- Bestisan SE05P Soundbar
- Power Cord
- Remote Control
- 3.5mm to 3.5mm Audio Cable (AUX)

- Digital Optical Cable
- Wall Mounting Screws and Wall Plugs
- User Manual (this document)

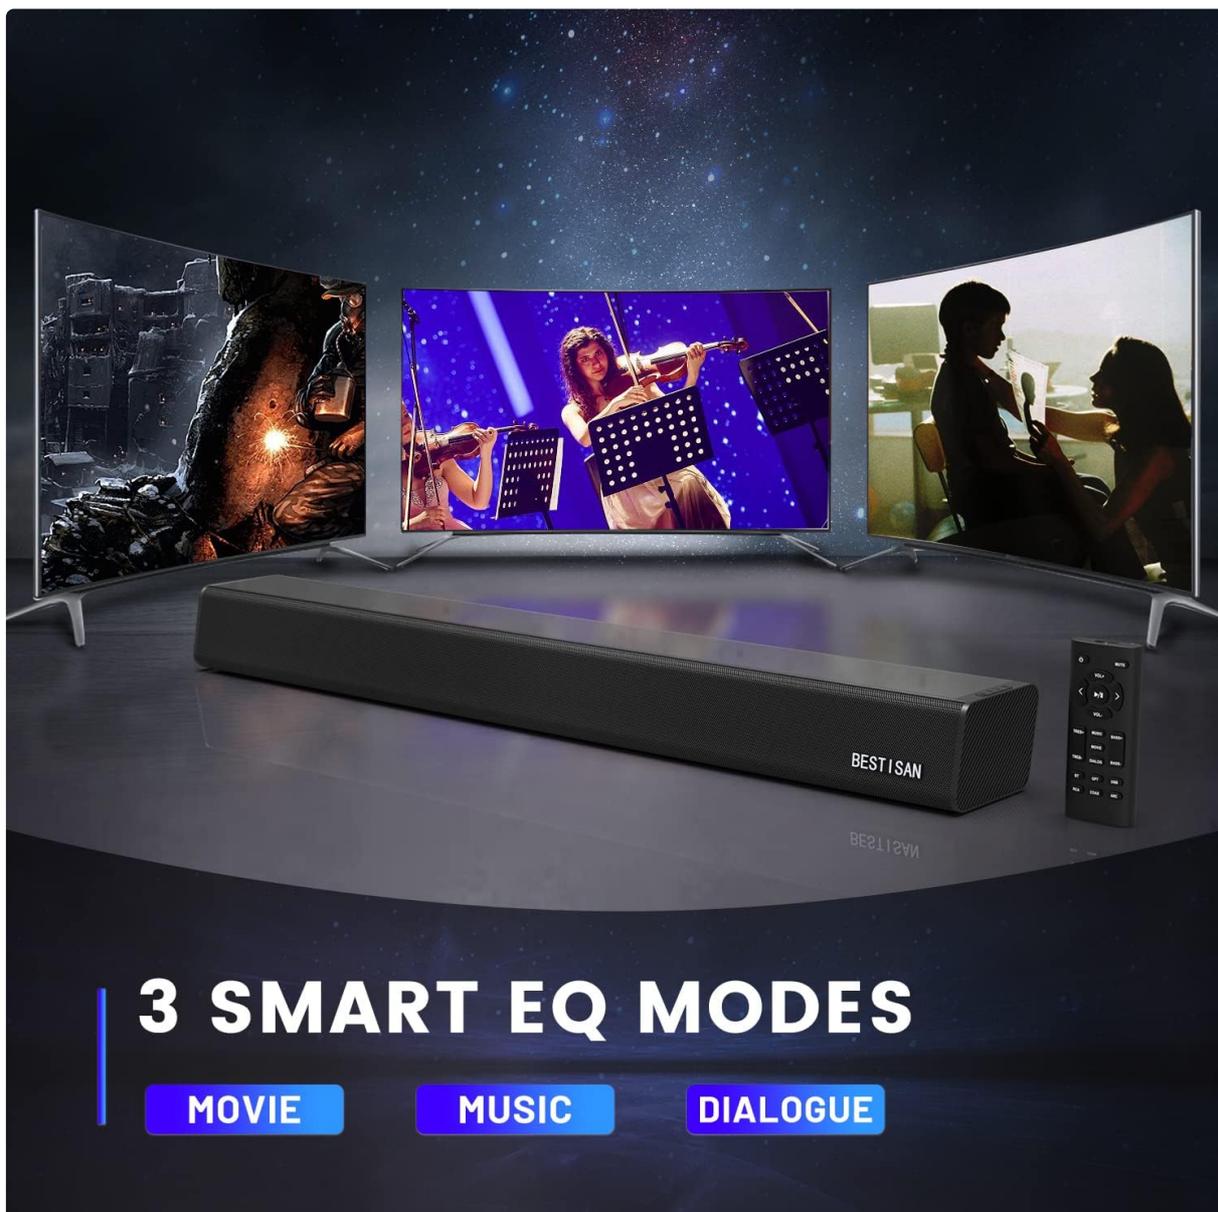



Image: A visual representation of the soundbar and all included accessories: Quick Start guide, Remote Control, 3.5mm audio cable, Digital Optical cable, Mount Screws, and Power Adapter.

## 3. SETUP GUIDE

### 3.1 Soundbar Placement

The Bestisan SE05P Soundbar offers flexible placement options to suit your home entertainment setup. It can be placed on a desktop or mounted on a wall.

- **Desktop Placement:** Position the soundbar directly on a flat surface in front of your television. Ensure there are no obstructions in front of the speakers for optimal sound delivery.
- **Wall Mounting:** Use the provided wall mounting screws and plugs to securely attach the soundbar to a wall below your television. Refer to the included Quick Start guide for detailed wall mounting instructions.

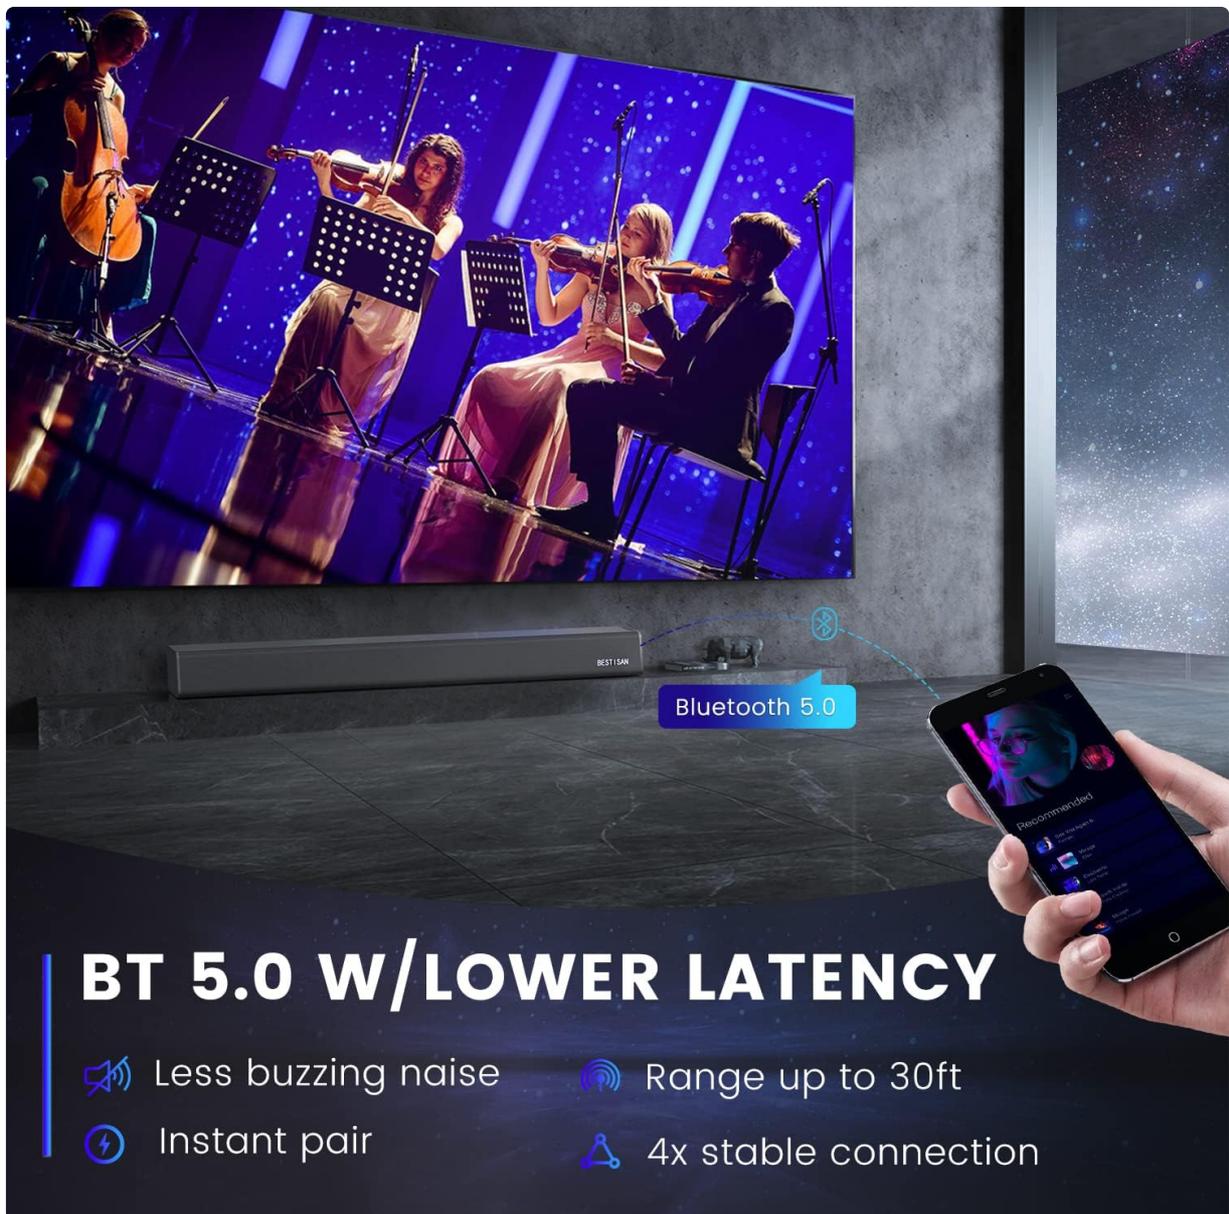

## BT 5.0 W/LOWER LATENCY

-  Less buzzing noise
-  Range up to 30ft
-  Instant pair
-  4x stable connection

Image: Demonstrates the soundbar's versatility, showing it both wall-mounted below a TV and placed on a desktop, along with its dimensions (28 inches wide, 2.8 inches high).

### 3.2 Connecting Your Soundbar

The soundbar supports multiple connection types. Choose the one that best suits your device.

- **HDMI ARC:** For the best audio quality and control using your TV remote, connect an HDMI cable (not included) from the soundbar's HDMI ARC port to your TV's HDMI ARC port. This allows your TV remote to control the soundbar's volume and power.
- **Optical:** Connect the included optical cable from the soundbar's OPTICAL port to your TV's optical digital audio output.
- **Coaxial:** Connect a coaxial cable (not included) from the soundbar's COAXIAL port to your TV's coaxial digital audio output.
- **AUX:** Use the included 3.5mm audio cable to connect the soundbar's AUX port to the headphone jack or audio output of your device.
- **USB:** Insert a USB drive into the soundbar's USB port to play audio files directly.



## Powerful Acoustic Structure

Built-in 4x 20W powerful full-range speakers and 2x bass reflex tubes, produce crystal clear sound and deep bass for all your movie, music, news, gaming.

Image: Close-up view of the soundbar's rear connection panel, clearly showing the HDMI-ARC, Coaxial, Optical, AUX, USB, and DC power input ports.

Your browser does not support the video tag.

Video: Demonstrates the ease of connecting the Bestisan Soundbar to a TV via HDMI-ARC, highlighting its broad remote compatibility and seamless integration with your existing TV remote for volume and power control.

## 4. OPERATING INSTRUCTIONS

---

### 4.1 Power On/Off and Input Selection

- **Power:** Press the **Power** button on the remote control or the soundbar to turn the unit on or off.
- **Input Selection:** Press the **Input** button on the remote or the soundbar to cycle through available input sources (HDMI ARC, Optical, Coaxial, AUX, USB, Bluetooth). The indicator light on the soundbar will change color to indicate the selected input.

### 4.2 Volume Control

- Use the **Volume +** and **Volume -** buttons on the remote or soundbar to adjust the master volume.
- Press the **Mute** button on the remote to mute or unmute the sound.

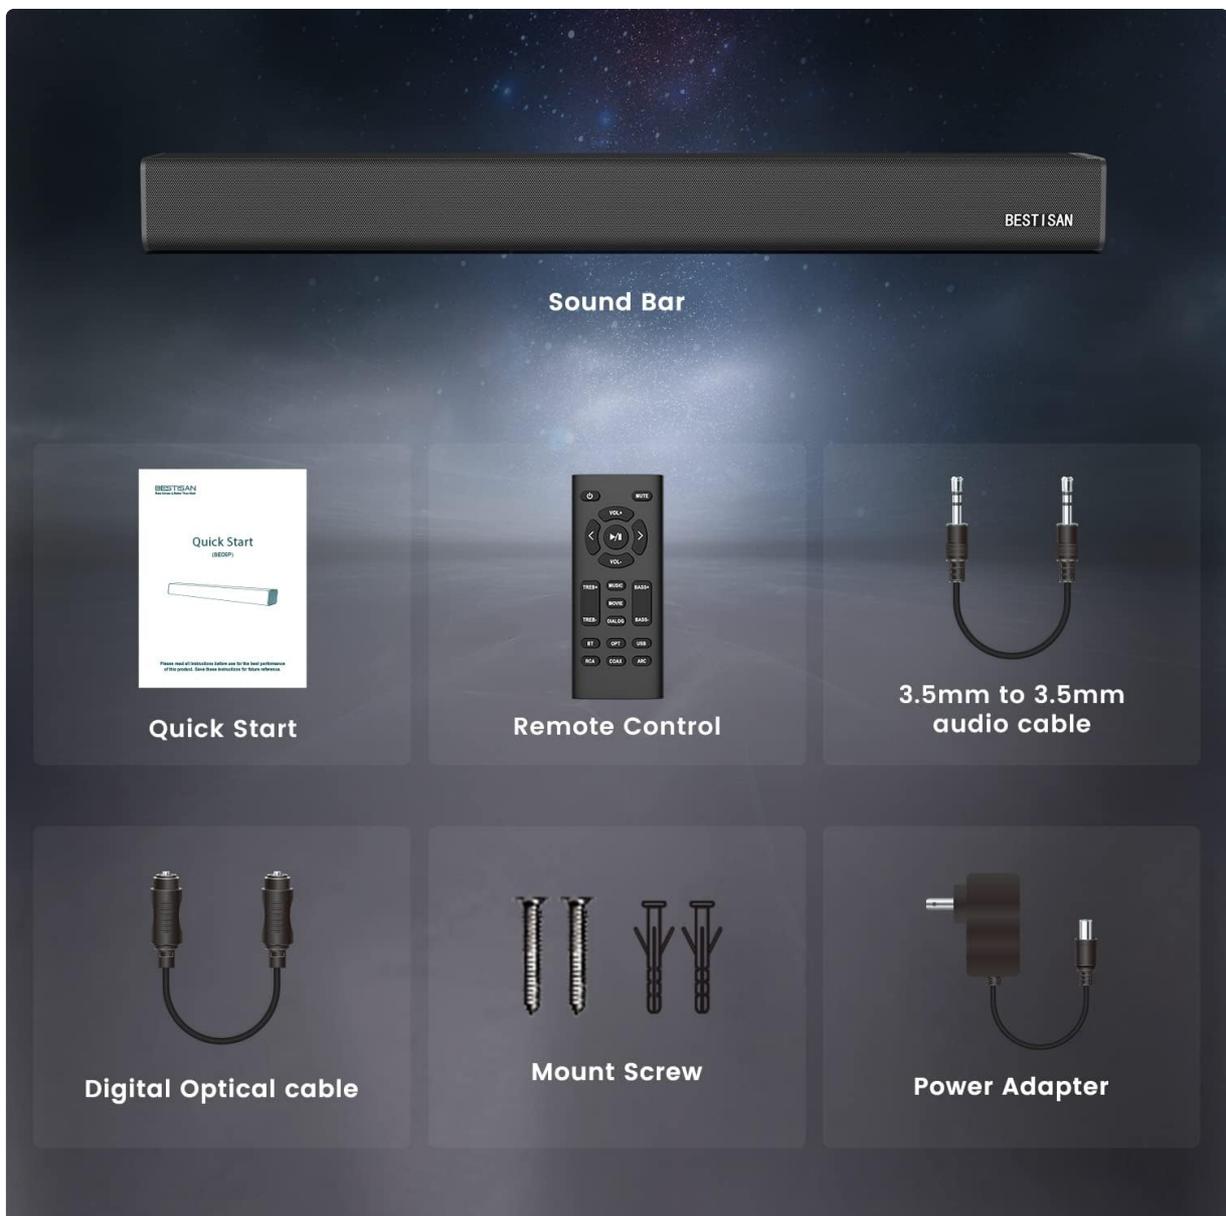


Image: The soundbar's remote control, illustrating the volume adjustment buttons and dedicated bass control buttons (Bass+ and Bass-).

### 4.3 Equalizer (EQ) Modes

The soundbar features three preset EQ modes to optimize audio for different content types:

- **Movie Mode:** Enhances surround sound effects and bass for an immersive cinematic experience.
- **Music Mode:** Provides balanced audio for music playback, emphasizing clarity and fidelity.
- **Dialogue Mode:** Boosts vocal clarity, making conversations easier to understand, especially in TV shows and news.

Press the corresponding **MOVIE**, **MUSIC**, or **DIALOGUE** button on the remote control to switch between modes.

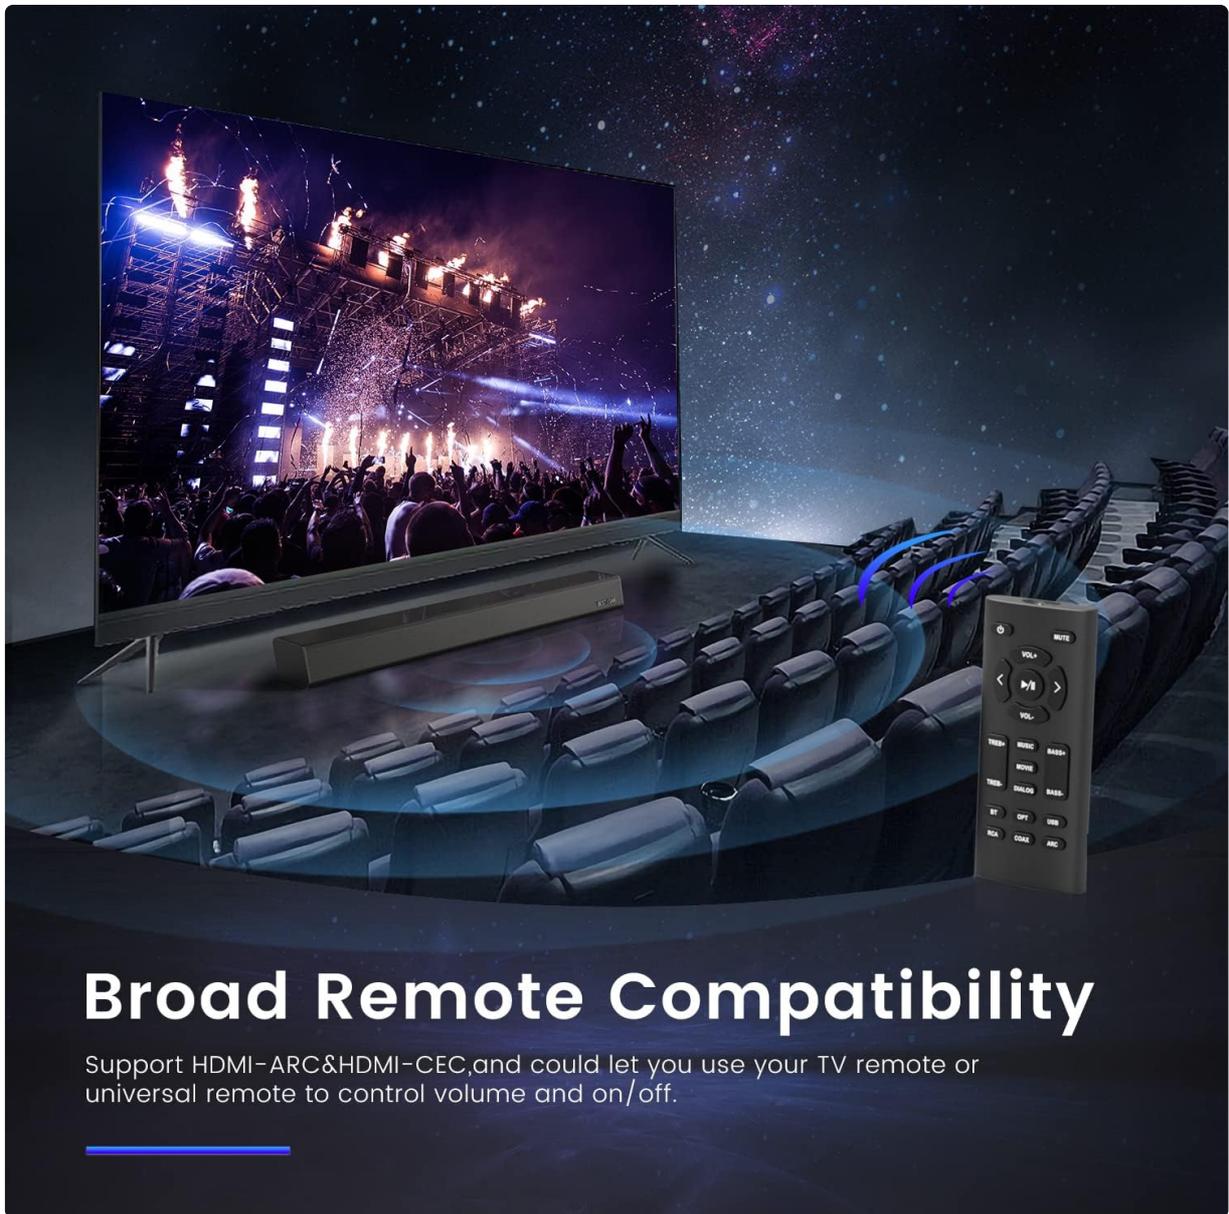


Image: Illustrates the three smart EQ modes (Movie, Music, Dialogue) available on the Bestisan Soundbar, designed to optimize audio for different content types.

## 4.4 Bluetooth Pairing

To connect a Bluetooth device to your soundbar:

1. Press the **BT** button on the remote control or the soundbar to switch to Bluetooth mode. The indicator light will flash, indicating pairing mode.
2. Enable Bluetooth on your mobile device (smartphone, tablet, etc.) and search for available devices.
3. Select "BESTISAN SE05P" from the list of devices.
4. Once connected, the indicator light on the soundbar will stop flashing and remain solid. You can now stream audio wirelessly from your device.



## Broad Remote Compatibility

Support HDMI-ARC&HDMI-CEC,and could let you use your TV remote or universal remote to control volume and on/off.

Image: Shows a smartphone wirelessly connected to the Bestisan Soundbar via Bluetooth 5.0, emphasizing lower latency, less buzzing noise, instant pairing, and a stable connection up to 30 feet.

## 5. MAINTENANCE

---

To ensure the longevity and optimal performance of your Bestisan Soundbar, follow these maintenance guidelines:

- **Cleaning:** Use a soft, dry cloth to wipe the surface of the soundbar. Do not use liquid cleaners or aerosol sprays, as they may damage the finish or internal components.
- **Ventilation:** Ensure the soundbar's vents are not blocked to prevent overheating.
- **Storage:** If storing the soundbar for an extended period, disconnect it from power and store it in a cool, dry place.

## 6. TROUBLESHOOTING

---

If you encounter issues with your soundbar, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
No sound from soundbar	Incorrect input selected; cables not connected properly; soundbar muted; TV audio output settings.	Ensure correct input is selected. Check all cable connections. Unmute the soundbar. Adjust TV audio output to external speakers or PCM format.
Remote control not working	Battery depleted; obstruction between remote and soundbar; remote not pointed correctly.	Replace remote battery. Remove any obstructions. Point remote directly at the soundbar's sensor.
Bluetooth connection issues	Soundbar not in pairing mode; device too far; interference.	Ensure soundbar is in Bluetooth pairing mode. Move device closer to soundbar. Avoid placing soundbar near other wireless devices. Try unpairing and re-pairing.
Sound distortion or buzzing noise	Volume too high; poor audio source; cable interference.	Lower the volume. Try a different audio source. Ensure cables are securely connected and not near power cables.

If the problem persists after trying these solutions, please contact customer support.

## 7. SPECIFICATIONS

Feature	Detail
Model Name	SE05P
Speaker Type	Soundbar
Speaker Maximum Output Power	80 Watts
Surround Sound Channel Configuration	2.1
Product Dimensions	3.5"D x 28"W x 2.8"H
Item Weight	5.69 pounds
Connectivity Technology	Bluetooth 5.0, HDMI-ARC, Optical, Coaxial, USB, AUX
Control Method	Remote
Recommended Uses	For Televisions
Included Components	Soundbar, Power Cord, Manual, Remote Control, Wall Mounting Kit

## 8. WARRANTY AND SUPPORT

Your Bestisan SE05P Soundbar comes with a limited warranty. Please refer to the warranty information provided with your purchase for specific terms and conditions.

- **Warranty Period:** Up to 12-month warranty.
- **Return Policy:** 30-day free return from the date of purchase.
- **Customer Service:** For any inquiries or support needs, please utilize the 24/7 E-mail assistant service. Contact details can be found on the manufacturer's official website or the product packaging.