

[Manuals.plus](#) /

› [Siljoy](#) /

› Siljoy 10-Light Modern Crystal Chandelier Instruction Manual

## Siljoy HLP009-C

# Siljoy 10-Light Modern Crystal Chandelier Instruction Manual

Model: HLP009-C | Brand: Siljoy

## INTRODUCTION

Thank you for choosing the Siljoy 10-Light Modern Crystal Chandelier. This luxury gold rectangular flush mount ceiling light is designed to enhance the ambiance of your living space, including dining rooms, living rooms, kitchen islands, hallways, bedrooms, offices, and restaurants. Crafted from high-quality stainless steel and K9 crystals, this manual provides essential information for the safe and proper installation, operation, and maintenance of your new lighting fixture.



Figure 1: Siljoy 10-Light Modern Crystal Chandelier in a kitchen setting.

## SAFETY INFORMATION

- Always turn off the main power supply at the circuit breaker before beginning any installation, cleaning, or maintenance.
- Consult a qualified electrician if you are unsure about the installation process.
- Ensure all electrical connections are secure and comply with local electrical codes.
- Handle crystal components with care to prevent breakage or injury.
- Do not exceed the maximum wattage specified for the bulbs.

## PACKAGE CONTENTS

Verify that all components are present and undamaged before proceeding with installation.

- Chandelier Frame (Gold Plated Stainless Steel Lamp Body)

- K9 Crystal Raindrop Lampshade Components
- Mounting Hardware (including ceiling plate, screws, wire nuts)
- Instruction Manual

*Note: E12 bulbs are not included and must be purchased separately.*

**FULLY DIMMABLE  
MINIMALIST  
BUT NOT SIMPLIFY  
MAKE YOUR  
HOME BRIGHTER**



**Dimmer &  
Dimmable Bulbs**

**(Not Included)**



Figure 2: Detailed view of chandelier components including the gold-plated frame, crystal elements, and bulb socket.

## SETUP AND INSTALLATION

The installation of this chandelier is designed to be straightforward, though it may require two people due to its weight and size. A detailed professional video tutorial is available to guide you through the process step-by-step.

### Recommended Tools (Not Included):

- Phillips head screwdriver
- Wire strippers

- Electrical tape
- Drill (for mounting holes if not pre-existing)
- Ladder

### Installation Steps:

1. **Turn off Power:** Locate the circuit breaker for the light fixture and turn off the power. Verify power is off using a voltage tester.
2. **Mounting Bracket Installation:** Attach the mounting bracket to the junction box in the ceiling using the provided screws. Ensure it is securely fastened to support the chandelier's weight.
3. **Wiring:** Connect the chandelier's wires to your household electrical wires according to standard electrical codes (e.g., black to black, white to white, ground to ground). Use wire nuts to secure connections.
4. **Attach Fixture to Ceiling:** Carefully lift the chandelier frame and attach it to the mounting bracket. Secure it with the canopy screws.
5. **Install Bulbs:** Screw in 10 E12 base bulbs (Max 40W each, not included). For optimal performance and versatility, 3-color E12 LED bulbs are recommended.
6. **Attach Crystals:** Individually attach the K9 crystal raindrop components to the chandelier frame. Refer to the assembly diagram for correct placement. This step can be time-consuming but is crucial for the chandelier's appearance.
7. **Restore Power:** Once all components are securely installed, turn the power back on at the circuit breaker.

Your browser does not support the video tag.

Video 1: Official installation and overview of the Modern Gold Rectangle Crystal Raindrop Chandelier. This video demonstrates the aesthetic appeal and some features of the chandelier.

### 3-Color Changing



— Neutral Light

— Warm Light



— Cool Light



DESIGN  
DECENT

LIGHT FIXTURES

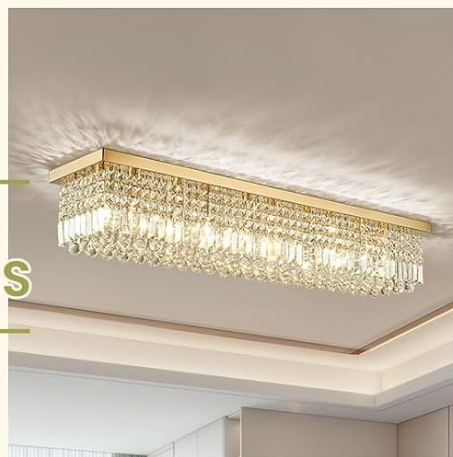


Figure 3: Chandelier dimensions and compatible E12 bulb types.

## OPERATING INSTRUCTIONS

Your Siljoy chandelier offers versatile lighting options to suit various moods and occasions.

### Light Color Changing:

If using 3-color E12 LED bulbs (recommended), you can switch between warm light (2700K), neutral light (4500K), and cool light (6000K) using your existing wall switch or a compatible app control (if applicable to your smart bulbs).



Figure 4: Demonstration of the 3-color changing capability (Warm, Neutral, Cool Light).

### **Dimmable Functionality:**

The chandelier is dimmable. To utilize this feature, you will need dimmable E12 bulbs and a compatible dimmer switch (both not included). This allows you to adjust the brightness to your preference, creating the perfect ambiance.



Figure 5: The chandelier's dimmable feature, requiring a dimmer switch and dimmable bulbs.

## MAINTENANCE AND CARE

Regular cleaning will help maintain the beauty and sparkle of your crystal chandelier.

- **Cleaning the Crystals:**

- Turn off the power to the chandelier before cleaning.
- Use a soft, lint-free cloth dampened with a mild glass cleaner or a mixture of water and white vinegar.
- Gently wipe each crystal. Avoid harsh chemicals or abrasive materials that could scratch the crystals.
- For thorough cleaning, some crystals may be carefully removed and washed, then dried completely before reattaching.

- **Cleaning the Metal Frame:**

- Wipe the gold-plated stainless steel frame with a soft, dry cloth.

- Do not use abrasive cleaners or polishes, as they may damage the finish.
- **Bulb Replacement:**
  - Ensure power is off before replacing bulbs.
  - Allow old bulbs to cool completely before removal.
  - Replace with E12 base bulbs, maximum 40W.

TROUBLESHOOTING

| Problem                                         | Possible Cause                                                    | Solution                                                                                                                            |
|-------------------------------------------------|-------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|
| Chandelier does not light up.                   | No power supply; Loose wiring; Faulty bulb(s).                    | Check circuit breaker; Verify all wire connections are secure; Replace bulb(s).                                                     |
| Lights flicker or dim unexpectedly.             | Loose bulb; Incompatible dimmer switch/bulbs; Overloaded circuit. | Tighten bulbs; Ensure dimmer and bulbs are compatible; Consult an electrician for circuit issues.                                   |
| Chandelier appears unstable after installation. | Mounting bracket not securely fastened; Incorrect installation.   | Ensure mounting bracket is firmly attached to the ceiling joist/blocking. Re-check installation steps, potentially with assistance. |
| Crystals appear dull or dirty.                  | Dust and grime accumulation.                                      | Clean crystals as per "Maintenance and Care" section.                                                                               |

SPECIFICATIONS

| Feature                 | Detail                                             |
|-------------------------|----------------------------------------------------|
| Brand                   | Siljoy                                             |
| Model Name              | HLP009-C                                           |
| Dimensions (L x W x H)  | 47" x 10" x 10" (120cm x 25cm x 25cm)              |
| Item Weight             | 26.6 Pounds                                        |
| Material                | Stainless Steel, K9 Crystal                        |
| Style                   | Modern                                             |
| Installation Type       | Flush Mount                                        |
| Light Source Type       | LED (Bulbs not included)                           |
| Number of Light Sources | 10                                                 |
| Bulb Base               | E12                                                |
| Maximum Wattage         | 40 Watts per bulb                                  |
| Voltage                 | 110 Volts (AC)                                     |
| Special Features        | Dimmable, 3-Color Changing (with compatible bulbs) |

| Feature               | Detail                 |
|-----------------------|------------------------|
| Recommended Room Size | 215-323 sq ft (20-30 ) |
| Manufacturer          | One Lighting           |
| UPC                   | 718687230619           |

### WARRANTY AND SUPPORT

Siljoy offers a **12-month warranty** on this chandelier, covering defects in workmanship. Additionally, a**30-day free return and refund policy** is available. If you receive the chandelier with any defects or broken crystals, please contact customer service for replacements as soon as possible.

For further assistance, please contact the manufacturer, One Lighting, or refer to the product listing on Amazon for customer service contact information.

*Please retain your purchase receipt for warranty claims.*

© 2024 Siljoy. All rights reserved.

### ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page’s manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question