WOPET F01 Plus

WOPET Automatic Pet Feeder User Manual

Model: F01 Plus

Product Overview

The WOPET Automatic Pet Feeder (Model F01 Plus) is a 7-liter capacity food dispenser designed for cats and dogs. It features programmable feeding schedules for up to 5 meals per day, precise portion control, and a personalized voice recorder to call your pet at meal times. This feeder ensures your pet receives their meals on schedule, promoting healthy eating habits.



Image: Front view of the WOPET Automatic Pet Feeder, showing the main unit and the food tray with kibble.

Key Features

- **Schedule Feeding Program:** Program up to 5 meals per day with adjustable portions (10g per portion, up to 40 portions per feeding). Ensures timely feeding even when you are away.

- **7L Large Capacity Food Storage:** The food bucket can hold up to 29 cups of dry food, sufficient for several days of feeding. The food storage is separate for easy removal and cleaning. Recommended kibble size is 0.2-0.6 inches.
- **Updated LED Screen Design:** Clear and bright LED panel with sensitive touch buttons for easy adjustment of feeding schedules and serving sizes.
- **Personalized Voice Message:** Record a 10-second voice message that plays automatically at each feeding time, helping to call your pet to their meal.
- **Dual Power Supply:** Can be powered by a wired adapter or by 3 alkaline D batteries (not included) as a backup, ensuring continuous feeding during power outages.



Image: The feeder next to a Golden Retriever, highlighting features like 1-5 meals per day, 1-40 portions per meal, 7L food tank, and 2-15mm kibble size recommendation.



Image: The feeder next to a cat, with a speech bubble indicating the personalized voice message feature.

Setup Guide

1. Unpacking and Placement

Carefully remove all components from the packaging. Place the feeder on a flat, stable surface near a power outlet,

ensuring it is out of reach of curious pets who might knock it over.

2. Power Supply Connection

Connect the wired adapter to the feeder's power port and plug it into a wall outlet. For backup power, insert 3 alkaline D batteries (not included) into the battery compartment located at the bottom of the unit. This ensures uninterrupted feeding in case of a power outage.



Image: Illustration of the feeder connected to a power adapter, with D batteries shown inside the unit for dual power supply.

3. Filling the Food Tank

Open the lid of the food tank. Pour dry pet food (kibble size 0.2-0.6 inches) into the tank. Ensure the lid is securely closed after filling to maintain food freshness and prevent spills.

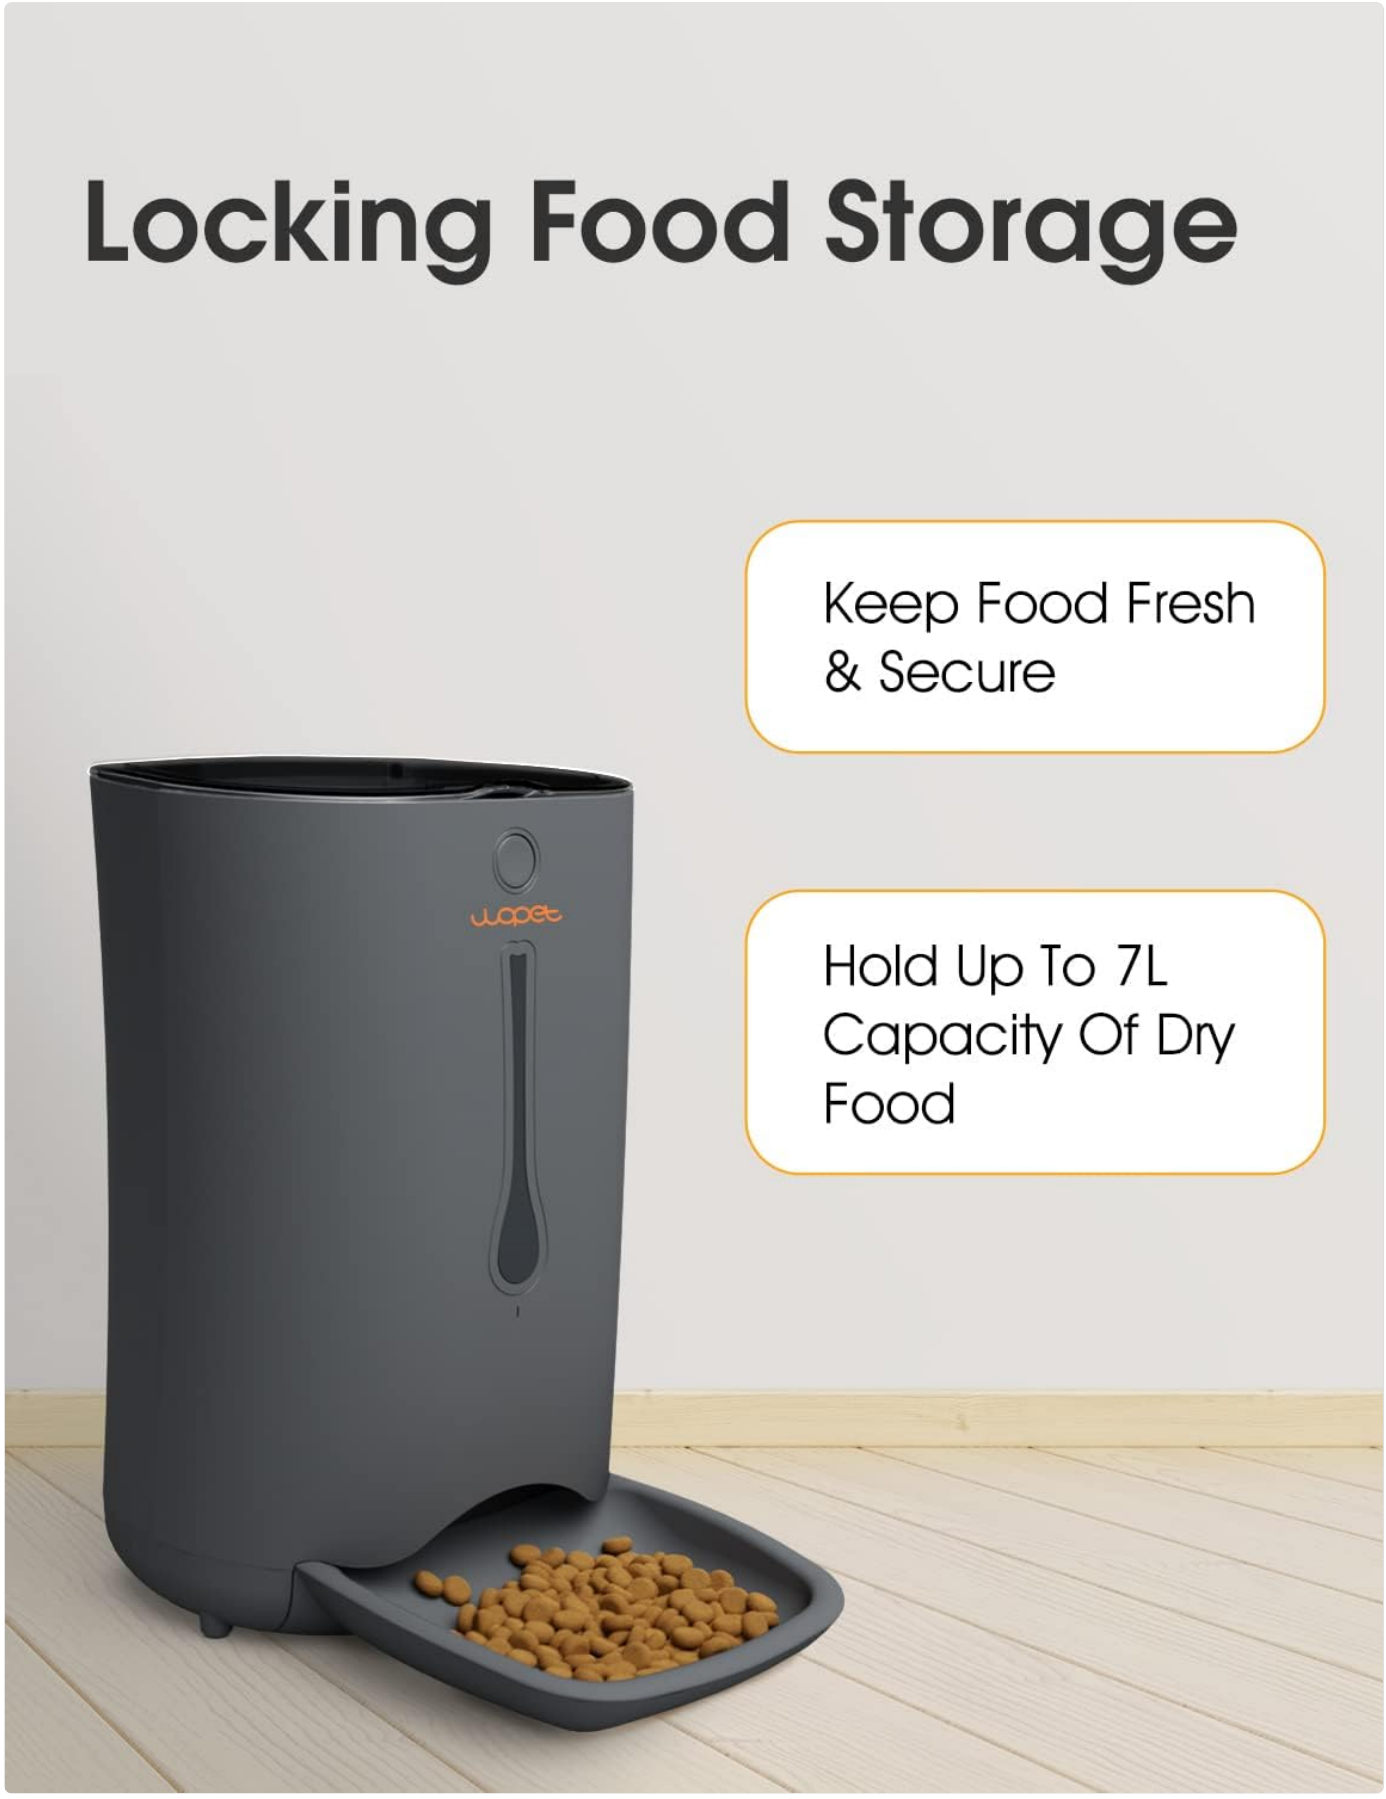


Image: The feeder with its top lid, emphasizing the secure and fresh food storage capacity of up to 7L.

Operating Instructions

1. Control Panel Overview

The feeder features an LED control panel for programming. Familiarize yourself with the buttons:

- **Recording button:** Used to record your voice message.
- **Feed button:** Manually dispenses a single portion.
- **Microphone:** For voice recording.
- **Minus button (-):** Decreases values or navigates.
- **Add button (+):** Increases values or navigates.
- **Setting button:** Enters programming mode.
- **Back (Lock) button:** Exits programming mode or locks/unlocks the panel.

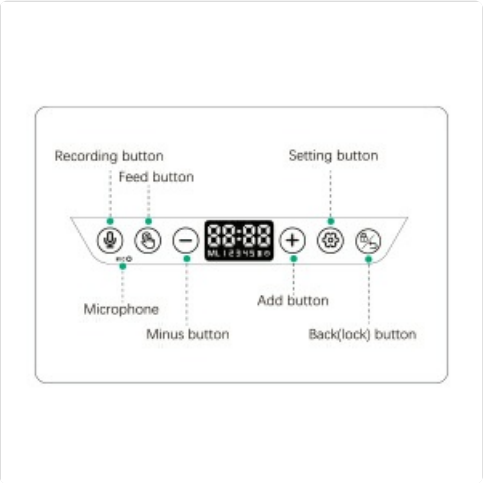


Image: A detailed diagram of the feeder's LED control panel, showing the function of each button.

2. Setting Feeding Schedule

1. Press the **Setting button** to enter programming mode.
2. Use the **Add (+)** and **Minus (-)** buttons to set the desired meal times (up to 5 per day).
3. For each meal time, use the **Add (+)** and **Minus (-)** buttons to set the number of portions (1-40 portions, 10g each).
4. Press the **Setting button** again to confirm and move to the next setting or exit.

3. Recording a Voice Message

1. Press and hold the **Recording button** (microphone icon) for three seconds.
2. Speak your 10-second message clearly into the microphone.
3. Release the **Recording button** to save the message. This message will play automatically at each scheduled feeding.

4. Manual Feeding

To dispense a single portion manually, briefly press the **Feed button**.

Maintenance

Regular cleaning of your WOPET Automatic Pet Feeder is essential for hygiene and optimal performance.

- **Food Storage and Tray:** The food storage bucket and feeding tray are designed for easy removal. Hand wash these components with mild soap and water. Rinse thoroughly and ensure they are completely dry before reassembling.
- **Main Unit:** Wipe the main unit with a damp cloth. Do not submerge the main unit in water.
- **Kibble Check:** Periodically check the food chute for any blockages or food buildup, especially if using larger kibble sizes. The feeder includes infrared induction to help prevent clogging.



Image: A close-up view of the feeder's food dispensing area, showing the angled food chute for smooth feeding.

Troubleshooting

If you encounter issues with your WOPET Automatic Pet Feeder, please review the following common solutions:

- **Feeder not dispensing food:**
  - Check if the feeder is properly plugged in or if the D batteries are correctly installed and have sufficient charge.
  - Ensure the food tank is not empty.
  - Verify that the food chute is not clogged. Clear any obstructions.
  - Confirm that a feeding schedule has been set and the current time is correct.
- **Voice message not playing:**
  - Ensure the voice message was recorded correctly by following the operating instructions.
  - Check if the volume is set appropriately.
- **LED screen not responding:**
  - Ensure the feeder is powered on.
  - Try pressing the Back (Lock) button to unlock the panel if it is locked.
  - Disconnect and reconnect the power supply.

For further assistance, please contact WOPET customer support.

Specifications

Feature	Detail
Model Name	F01 Plus

Brand	WOPET
Food Capacity	7 Liters (approx. 29 cups)
Meals Per Day	Up to 5
Portions Per Meal	1-40 (10g per portion)
Kibble Size	0.2-0.6 inches (5-15mm)
Power Supply	AC Adapter, 3x D Batteries (backup, not included)
Voice Recording	10 seconds
Dimensions (LxWxH)	9.69 x 12.76 x 15.12 inches
Item Weight	0.35 ounces (unit weight, 10 Grams listed elsewhere, using the more specific one)
Material	Plastic
Target Species	Cat, Dog

Warranty Information

The WOPET Automatic Pet Feeder comes with a **1-year warranty** from the date of purchase. This warranty covers manufacturing defects and malfunctions under normal use. Please retain your proof of purchase for warranty claims.

Support

For any questions, technical support, or warranty claims, please visit the official WOPET Store or contact their customer service directly.

Visit the WOPET Store

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question