

[Manuals.plus](#) /

› [ZEBRONICS](#) /

› ZEBRONICS Juke BAR 4050 Soundbar User Manual

ZEBRONICS ZEB-JUKE BAR 4050

ZEBRONICS Juke BAR 4050 Soundbar User Manual

Model: ZEB-JUKE BAR 4050

INTRODUCTION

This manual provides essential information for the proper setup, operation, and maintenance of your ZEBRONICS Juke BAR 4050 soundbar. Please read it thoroughly before using the product to ensure optimal performance and safety.

The ZEB-JUKE BAR 4050 is a compact soundbar system designed to enhance your audio experience with 75W RMS output, featuring a 10.16cm (4") subwoofer and dual drivers for clear sound and powerful bass.



Image: The soundbar and subwoofer integrated into a home entertainment setup, highlighting its compact design and 75W RMS output.

SAFETY INSTRUCTIONS

To prevent electric shock, fire, or damage to the unit, please observe the following safety precautions:

- Do not expose this appliance to rain or moisture.
- Do not place objects filled with liquids, such as vases, on the appliance.
- Ensure proper ventilation; do not block any ventilation openings.
- Place the unit on a stable, flat surface.
- Only use attachments/accessories specified by the manufacturer.
- Unplug the appliance during lightning storms or when unused for long periods.
- Refer all servicing to qualified service personnel.

PACKAGE CONTENTS

Carefully unpack your soundbar system and ensure all items are present and in good condition. The package

should include:

- Sound Bar - 1 unit
- Subwoofer - 1 unit
- Remote Control - 1 unit
- Input Cable (Audio) - 1 unit
- Power Adapter - 1 unit
- QR Code Guide - 1 unit
- Wall Mount Fasteners - 1 unit



Image: All components included in the ZEB-JUKE BAR 4050 package, laid out for inspection.

PRODUCT OVERVIEW

Soundbar and Subwoofer

The ZEB-JUKE BAR 4050 system consists of a main soundbar unit and a dedicated subwoofer for enhanced bass. The soundbar features dual drivers for clear audio, while the 10.16cm (4") subwoofer delivers powerful low frequencies.

Powerful Subwoofer

Driver Size 10.16cm



Image: Detailed view of the powerful 10.16cm (4") subwoofer.

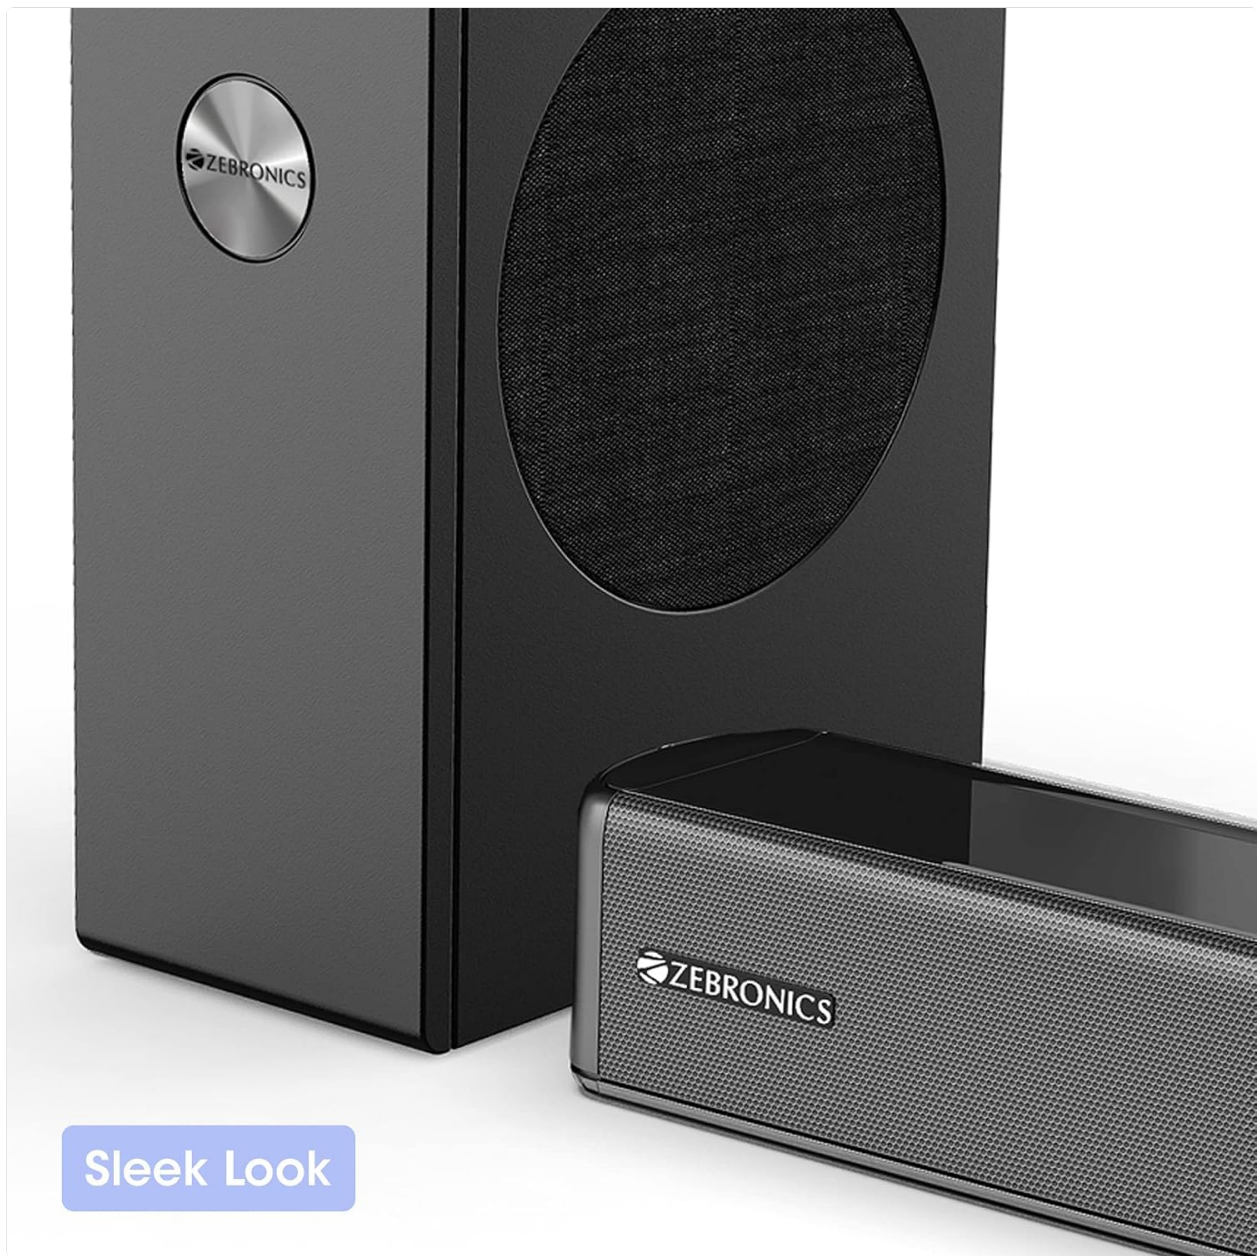


Image: The soundbar and subwoofer together, emphasizing their sleek aesthetic.

Connectivity Ports

The soundbar offers multiple connectivity options located on the rear panel:

- **HDMI ARC:** For high-quality audio connection with ARC-enabled TVs.
- **Optical:** Digital audio input for various devices.
- **AUX:** Analog audio input for devices with a 3.5mm jack.
- **USB:** For playing media from USB storage devices.
- **DC IN:** Power input.
- **DC OUT:** Power output (likely for subwoofer connection).

Multi-Connectivity Options



Image: Close-up of the soundbar's rear panel, detailing all available connectivity ports.

Controls and Indicators

The soundbar features an LED indicator to display the current input mode. Basic controls are available on the unit itself, with full functionality provided by the remote control.



Image: The soundbar's top panel with integrated controls and its overall premium design.

SETUP

Placement

Place the soundbar on a stable, flat surface directly in front of your television for the best audio experience. The subwoofer can be placed on the floor near the soundbar, ideally in a corner for enhanced bass.

Connecting Power

1. Connect the power adapter to the DC IN port on the soundbar.
2. Plug the other end of the power adapter into a wall outlet.
3. Connect the subwoofer to the soundbar using the DC OUT port if it's a wired connection (refer to the QR Code Guide for specific subwoofer connection details).

Audio Connections

Choose one of the following methods to connect your soundbar to your audio source (e.g., TV, DVD player):

- **HDMI ARC:** Connect an HDMI cable from the HDMI ARC port on the soundbar to the HDMI ARC port on

your TV. Ensure your TV's HDMI ARC function is enabled.

- **Optical:** Connect an optical cable from the OPTICAL port on the soundbar to the optical output on your TV or other audio device.
- **AUX:** Connect the provided input cable (3.5mm to RCA or 3.5mm to 3.5mm, depending on the cable provided) from the AUX port on the soundbar to the audio output of your device.

OPERATING INSTRUCTIONS

Power On/Off

Press the Power button on the soundbar or the remote control to turn the unit on or off.

Selecting Input Mode

Press the "Input" button on the remote control or the soundbar to cycle through available input modes (HDMI ARC, Optical, Bluetooth, AUX, USB). The LED indicator will change to reflect the selected mode.

Bluetooth Pairing

1. Select Bluetooth mode on the soundbar. The LED indicator will flash, indicating it's in pairing mode.
2. On your mobile device, search for Bluetooth devices and select "ZEB-JUKE BAR 4050".
3. Once paired, the LED indicator will stop flashing and remain solid.

USB Playback

Insert a USB storage device into the USB port. The soundbar will automatically switch to USB mode and begin playing compatible audio files.

Remote Control Functions

The fully functional remote control allows for comprehensive management of your soundbar:

- **Power:** Turn the soundbar on/off.
- **Input:** Select input source (HDMI ARC, Optical, Bluetooth, AUX, USB).
- **Volume +/-:** Adjust the master volume.
- **Media Controls:** Play/Pause, Next/Previous track (for Bluetooth/USB modes).
- **EQ Modes:** Select preset equalizer modes.
- **Bass +/-:** Adjust bass levels.
- **Treble +/-:** Adjust treble levels.

Fully Functional Remote



Image: The remote control for the soundbar, illustrating its various functions.

WALL MOUNTING

The ZEBRONICS Juke BAR 4050 soundbar is designed to be wall-mountable. Use the provided wall mount fasteners and follow these general steps:

1. Determine the desired mounting location on the wall, ensuring it is level and within reach of power and audio cables.
2. Mark the positions for drilling holes using the soundbar's mounting points as a guide.
3. Drill pilot holes and insert wall anchors if necessary (depending on wall material).
4. Secure the mounting brackets (if separate) or the soundbar directly to the wall using the provided screws.
5. Carefully attach the soundbar to the mounted brackets or screws.

Note: For detailed wall mounting instructions, refer to the QR Code Guide included in your package or consult a professional installer.

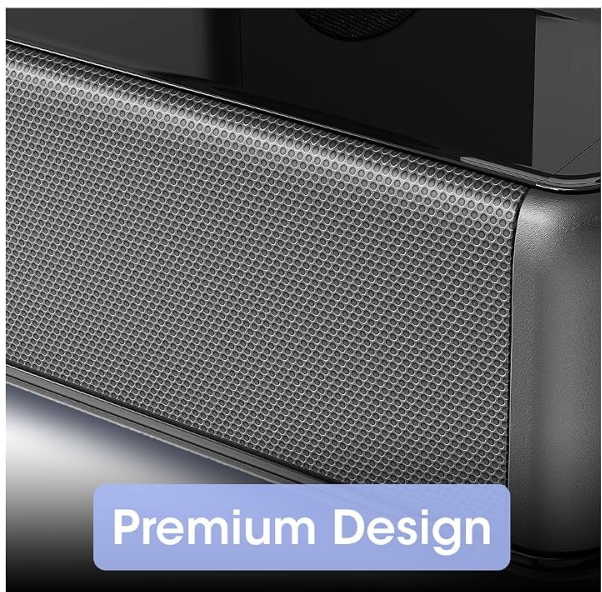
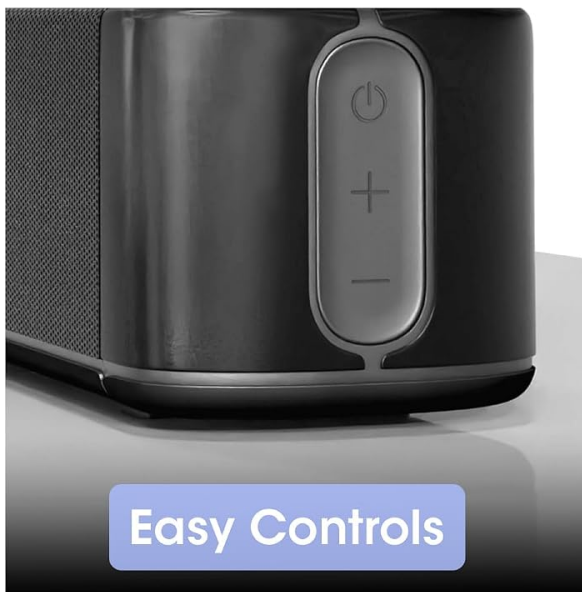


Image: The soundbar shown mounted on a wall, illustrating its space-saving installation option.

MAINTENANCE

Proper care ensures the longevity of your soundbar system:

- **Cleaning:** Use a soft, dry cloth to clean the surfaces of the soundbar and subwoofer. Do not use liquid cleaners or abrasive materials.
- **Ventilation:** Ensure the ventilation openings are clear of dust and debris to prevent overheating.
- **Storage:** If storing the unit for an extended period, unplug it from the power outlet and store it in a cool, dry place.

TROUBLESHOOTING

If you encounter issues with your soundbar, refer to the following common problems and solutions:

Problem	Possible Solution
---------	-------------------

Problem	Possible Solution
No power	◦ Ensure the power adapter is securely connected to the soundbar and a working power outlet. ◦ Check if the power outlet is functional.
No sound	◦ Verify the correct input mode is selected (HDMI ARC, Optical, Bluetooth, AUX, USB). ◦ Check all audio cables for secure connections. ◦ Increase the volume on both the soundbar and the connected device. ◦ If using HDMI ARC, ensure ARC is enabled on your TV and the correct HDMI port is used.
Bluetooth pairing issues	◦ Ensure the soundbar is in Bluetooth pairing mode (LED flashing). ◦ Move your Bluetooth device closer to the soundbar. ◦ Forget "ZEB-JUKE BAR 4050" from your device's Bluetooth list and try pairing again.
Remote control not working	◦ Check and replace the batteries in the remote control. ◦ Ensure there are no obstructions between the remote and the soundbar's sensor.

SPECIFICATIONS

Feature	Detail
Brand	ZEBRONICS
Model Name	ZEB-JUKE BAR 4050
Speaker Maximum Output Power	75 Watts RMS
Subwoofer Speaker Diameter	10.16 cm (4 Inches)
Connectivity Technology	Auxiliary, Bluetooth v5.0, HDMI ARC, Optical, USB
Audio Output Mode	Surround
Mounting Type	Wall Mount
Control Method	Remote Control
Color	Black
Item Dimensions (D x W x H)	31.2D x 14.7W x 45.4H Centimeters
Item Weight	3750 Grams
Compatible Devices	Laptop, Smartphone, Tablet, Television

WARRANTY AND SUPPORT

Your ZEBRONICS Juke BAR 4050 comes with a **1-year warranty** from the date of purchase. Please retain your purchase receipt for warranty claims.

For technical support, service, or warranty inquiries, please contact Zebronics India Private Limited. Contact information can typically be found on the official Zebronics website or through the retailer where the product was purchased.

Manufacturer: Zeb-Juke bar 4050, Zebronics India Private Limited