

## Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [ABBIDOT](#) /

› [ABBIDOT Dog Training Collar User Manual](#)

## ABBIDOT T30

# ABBIDOT Dog Training Collar User Manual

Model: T30 E-collar | For Medium to Large Dogs (15-120 lbs)

## PRODUCT OVERVIEW

The ABBIDOT Dog Training Collar is designed to assist in training medium to large dogs, weighing between 15 and 120 lbs. It features 5 safe training modes, a long wireless range, and a waterproof design for versatile use. This manual provides detailed instructions for setup, operation, maintenance, and troubleshooting to ensure effective and safe use of your training collar.



Image: The ABBIDOT T30 E-collar remote and receiver, highlighting its role as a training partner.

## PACKAGE CONTENTS

Before beginning, please ensure all items are present in your package:

- Remote Transmitter
- Receiver Collar(s) (quantity may vary based on purchase)
- Adjustable Nylon Collar Strap
- USB-C Charging Cable
- Contact Points (short and long sets)
- Silicone Conductive Caps
- Test Light Tool
- Wrench/Tightener Tool
- User Manual (this document)



Image: The complete ABBIDOT Dog Training Collar set, including the remote, two receiver collars, and accessories.

## SETUP GUIDE

### 1. Charging the Devices

Fully charge both the remote transmitter and the receiver collar before first use. The remote features a USB-C charging port. The receiver collar has a charging port protected by a rubber cover. Use the provided USB-C cable for charging. A full charge typically takes approximately 2 hours.



Image: Visual representation of the long-lasting battery life for the remote (16 days work time) and receiver, with USB-C charging capability.

### 2. Attaching Contact Points and Silicone Caps

Select the appropriate length of contact points (short for short-haired dogs, long for long-haired dogs) to ensure proper skin contact. Screw them firmly onto the receiver. For added comfort and to prevent skin irritation, place the silicone conductive caps over the contact points. This also helps prevent direct metal-to-skin contact.

## 2 Layers

of Silicone Caps. Prevent the Dogs Skin Damage



## 36 Levels

of General and Boosted Safe Stimulation



## ABBI-TES

Accidental Shock Safeguard  
Press Down the Knob to Lock



Image: The receiver collar showing the contact points and the optional silicone caps for skin protection. The remote displays the 36 stimulation levels.

### 3. Fitting the Collar

Place the receiver collar around your dog's neck so that the contact points are positioned underneath, making direct contact with the skin. The collar should be snug enough to allow two fingers to fit comfortably between the strap and your dog's neck. A proper fit is crucial for consistent and effective stimulation. The collar strap is adjustable and can be cut to size if too long.



For Long/Short Fur Dogs



Comfort and Soft



Stand Wear and Tear

## LIGHTWEIGHT E-COLLAR FOR 15~120 lbs



2.5 inch

1.35 inch

0.1 Lb

→ Min 6 inches



Max 27 inches →



Adjustable and Cuttable



Image: Illustration of proper collar placement on a dog, along with the adjustable and lightweight design of the e-collar, suitable for dogs from 15 to 120 lbs.

### OPERATING INSTRUCTIONS

#### 1. Powering On/Off

To power on the remote, press and hold the power button on the side. To power on the receiver, press and hold the power button on the receiver unit. Repeat the process to power off both devices when not in use.

#### 2. Remote Control Functions

The remote features an intuitive design with a clear LCD display for easy operation, even in outdoor conditions. It includes a safety lock mechanism to prevent accidental activation.

- **Knob Type Gear (Push +/-):** Adjusts stimulation levels (1-36). Push the knob down to lock the remote and prevent accidental changes.
- **Channel Selection:** Switch between training channels for up to two dogs.

- **Light Button:** Activates the tracking light on the receiver collar. Can be set to stay on or blink for visibility in low light.
- **Tone Button:** Delivers an audible tone to the receiver.
- **Vibration Button:** Delivers a vibration to the receiver.
- **Shock Button:** Delivers a static stimulation to the receiver. Levels 1-15 are general stimulation, 16-36 are boosted stimulation.
- **10s Stop Safety Feature:** Automatically stops stimulation after 10 seconds to prevent over-stimulation.



Image: Detailed diagram of the remote control and receiver collar, labeling all buttons and features including the safety keypad lock, level adjustments, training modes (tone, vibration, shock), and charging port.

### 3. Training Modes


The collar offers 5 distinct training modes:

- **Light:** For locating your dog in the dark or increasing visibility.
- **Vibration:** A gentle, non-harmful tactile cue.
- **Tone:** An audible signal for commands or warnings.
- **General Stimulation (1-15 Levels):** Adjustable static stimulation for various training needs.
- **Boosted Stimulation (16-36 Levels):** Higher intensity static stimulation for more stubborn behaviors or emergency situations.

# Prevent Accidental Touch Design

## ABBI-TES

Knob Type Gear With Safety Lock

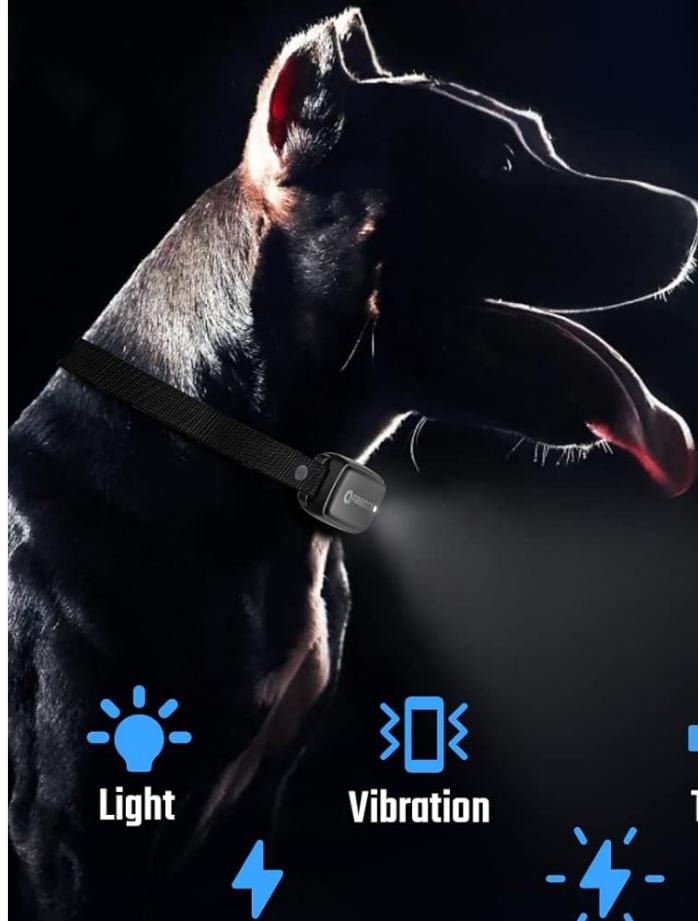

Light



Vibration



Tone



General Stimulation  
(1~15 Levels)



Boosted Stimulation  
(16~36 Levels)



Image: The remote control displaying the various training modes: Light, Vibration, Tone, General Stimulation (1-15 Levels), and Boosted Stimulation (16-36 Levels).

### 4. Video Demonstration

Watch this official video for a visual guide on setting up and operating your ABBIDOT Dog Training Collar, including a demonstration of its features and components.

Your browser does not support the video tag.

Video: An unboxing and feature demonstration of the ABBIDOT Dog Training Collar, showing its components, remote functions, and how it works on a dog.

### MAINTENANCE

Proper maintenance ensures the longevity and effectiveness of your training collar:

- **Cleaning:** Regularly clean the receiver collar and contact points with a damp cloth. Ensure no dirt or debris accumulates around the contact points, as this can affect performance.

- **Battery Care:** Recharge the devices when the battery indicator is low. Avoid fully depleting the battery frequently to prolong its lifespan. Store in a cool, dry place when not in use for extended periods.
- **Collar Inspection:** Periodically check the collar strap for wear and tear. Replace if damaged to ensure secure fit and prevent loss.
- **Skin Health:** Monitor your dog's neck area for any signs of irritation or redness. If irritation occurs, discontinue use and consult a veterinarian. Consider repositioning the collar or using the silicone caps if not already in use.

## TROUBLESHOOTING

| Problem                             | Possible Cause  | Solution  |
|-------------------------------------|---|---|
| Collar not responding to remote.    | Low battery on either device; devices not paired; out of range.                   | Charge both devices; re-pair the remote and receiver (refer to pairing instructions in full manual); ensure within 3000 ft range. |
| Stimulation not felt by dog.        | Improper collar fit; contact points not touching skin; stimulation level too low. | Adjust collar for snug fit; ensure contact points are through fur and touching skin; increase stimulation level gradually.        |
| Remote LCD not displaying.          | Low battery; remote is off.   | Charge remote; press and hold power button to turn on.  |
| Dog shows signs of skin irritation. | Collar worn too long; improper fit; allergic reaction.                            | Remove collar for several hours daily; ensure proper fit and use silicone caps; consult veterinarian if irritation persists.      |

## SPECIFICATIONS

- **Brand:** ABBIDOT
- **Model:** T30 E-collar (2022 Upgrade)
- **Target Dog Weight:** 15-120 lbs
- **Training Modes:** Tone, Vibration, Light, General Stimulation (1-15 Levels), Boosted Stimulation (16-36 Levels)
- **Wireless Range:** Up to 3000 ft (914 meters)
- **Waterproof Rating:** IPX7 (Receiver Collar)
- **Remote Battery Life:** Up to 16 days (work time), 100 days (standby)
- **Receiver Battery Life:** Up to 10 days (work time)
- **Charging Time:** Approx. 2 hours (USB-C)
- **Collar Length:** Adjustable from 6 inches to 27 inches
- **Receiver Weight:** Approx. 0.1 lbs (1.6 oz)
- **Remote Display:** High Definition LCD with 170° wide field of vision
- **Safety Features:** Knob type gear with safety lock, 10s automatic stop stimulation
- **Multi-Dog Support:** Yes, up to 2 dogs (with additional collars)

**IPX7  
WATERPROOF**

**3000ft  
Control Range**



Image: The remote control in hand, demonstrating the 3000ft control range and the IPX7 waterproof rating of the collar, with a dog in a water environment.

## WARRANTY AND SUPPORT

For warranty information, technical support, or any inquiries regarding your ABBIDOT Dog Training Collar, please refer to the contact details provided on the product packaging or visit the official ABBIDOT website. Keep your purchase receipt as proof of purchase for warranty claims.



Image: Certifications indicating the product's reliability and professional standards.

© 2024 ABBIDOT. All rights reserved.

For customer support, please visit [ABBIDOT Store on Amazon](#).