

BOUSNIC RS2B

Bousnic Dog Training Collar User Manual

Model: RS2B

1. INTRODUCTION

Thank you for choosing the Bousnic Dog Training Collar. This product is designed to help you train your dog effectively and humanely, promoting a better relationship between you and your pet. It features a long-range remote, multiple training modes, and a durable, waterproof receiver.



Image 1.1: Bousnic Dog Training Collar System

2. PRODUCT FEATURES

- **3300ft Remote & Through-Wall Antenna:** Offers a wide control range for training indoors or outdoors without signal delay.

Up to 3300ft Remote Range



Image 2.1: Extended Remote Control Range

- **3 Separate & Adjustable Training Modes:** Includes Beep (1-8 levels), Vibration (1-16 levels), and Safe Shock (1-99 levels) for tailored training.

3 Separate & Adjustable Training Modes

Correct Bad Behaviors in Time



Level 1-8



Level 1-16



Level 1-99



Barking



Chewing



Chasing



Digging

Image 2.2: Training Modes Overview

- **IP67 Waterproof and Compact Receiver:** The receiver is fully sealed, allowing use in rain, during bathing, swimming, or stream-trekking. Lightweight and suitable for dogs from 5-120 lbs.
- **Security Lock & Dual Channel:** Independent buttons on the ergonomic remote prevent accidental activation. Supports training of two dogs simultaneously with clear channel switching.


One Key Lock to Prevent Misoperation



Image 2.3: Remote Security Lock and Dual Channel

- **Quick Charge & Ultra Last Long:** The collar and remote charge in 2-3 hours and can last 15-60 days on a single charge.

Quick Charge & Ultra Last Long

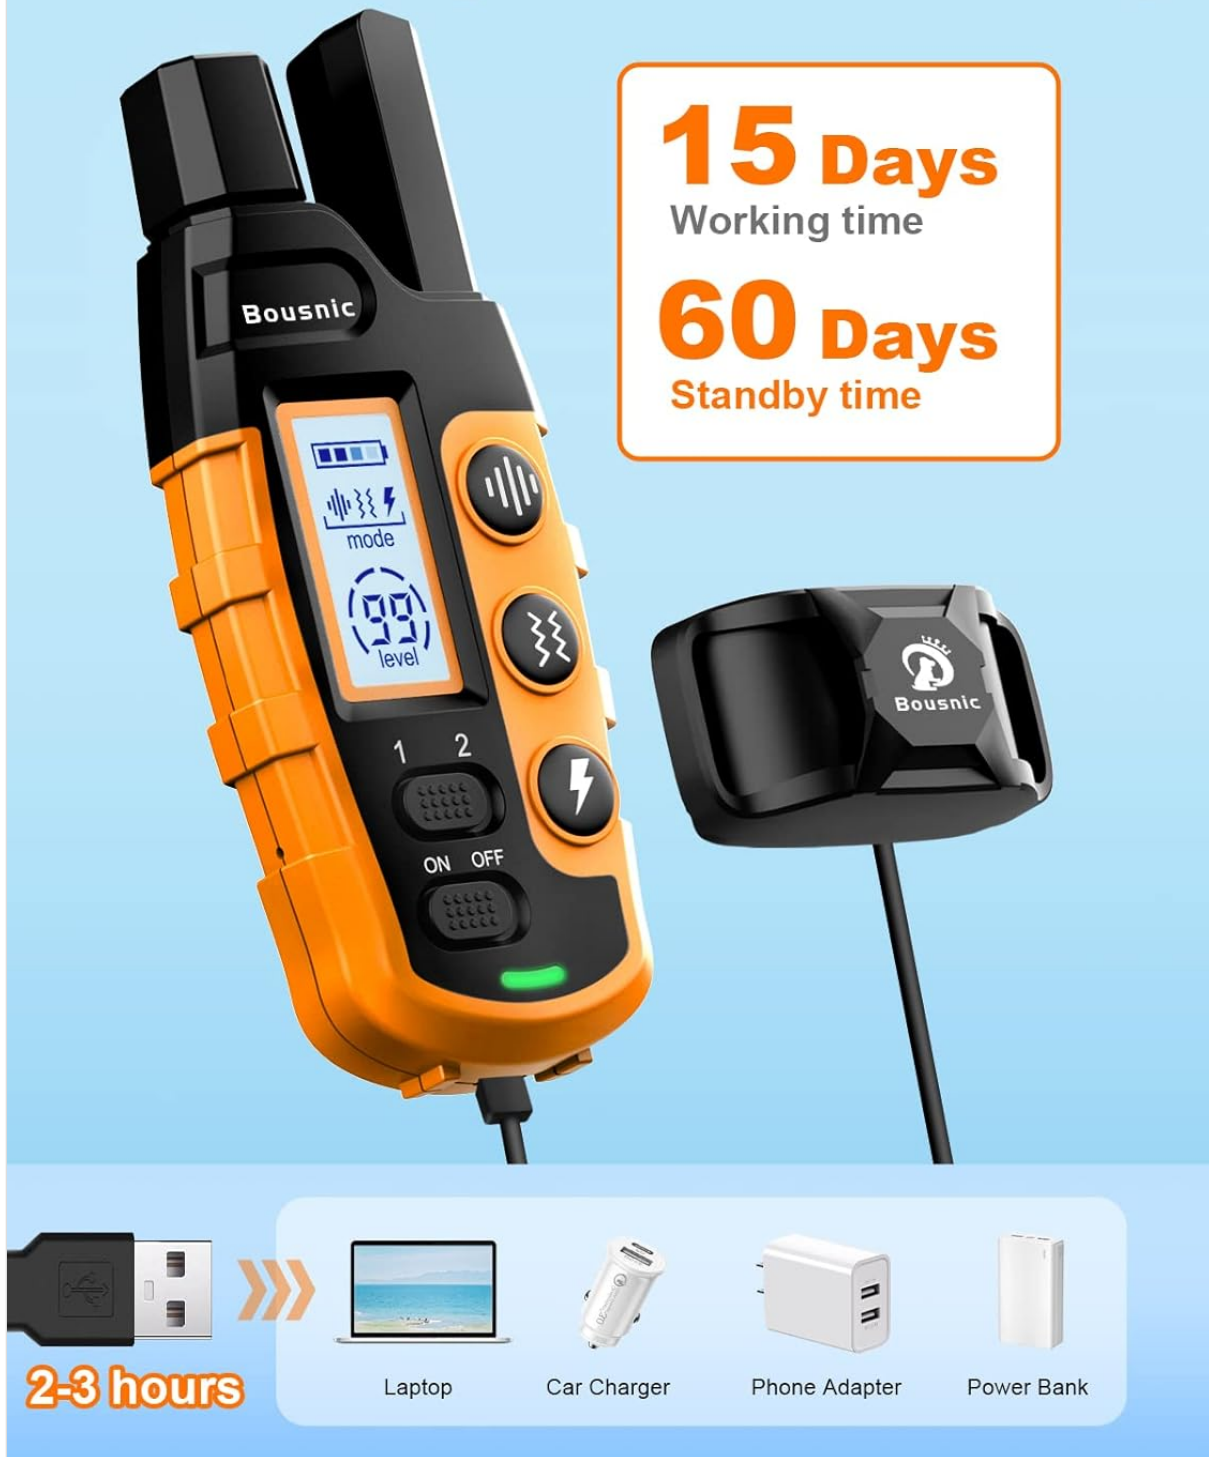

The advertisement features a black and orange Bousnic remote transmitter on the left. The transmitter has a digital display showing a battery level of 99, a mode icon, and a level icon. It also has several buttons, including a power button with a lightning bolt icon and a button with a crown icon. A green LED light is visible at the bottom. To the right of the transmitter is a black receiver collar with the Bousnic logo. Below these items, a USB cable is shown with an arrow pointing to four icons: a laptop, a car charger, a phone adapter, and a power bank. The text '2-3 hours' is displayed next to the USB cable.

15 Days
Working time

60 Days
Standby time

2-3 hours

Laptop Car Charger Phone Adapter Power Bank

Image 2.4: Quick Charging Capability

3. PACKAGE CONTENTS

- 1 x Remote Transmitter
- 2 x Receiver Collars (Orange)
- 2 x Adjustable Nylon Straps
- 4 x Sets of Contact Points (Short & Long)
- 4 x Silicone Conductive Caps
- 1 x USB Charging Cable (Adapter not included)

- 1 x Test Light Tool
- 1 x User Manual (This document)



Image 3.1: Complete Package Contents

4. SETUP

4.1 Charging the Devices

Before first use, fully charge the remote transmitter and receiver collars. A full charge takes approximately 2-3 hours.

1. Connect the USB charging cable to the charging port on both the remote and the receiver.
2. Plug the USB cable into a 5V phone charger, power bank, or computer USB port. (Adapter not included)
3. The battery indicator on the remote will show charging status. The receiver's LED will indicate charging.
4. Once fully charged, disconnect the devices.

4.2 Pairing the Remote and Receiver

The devices are typically pre-paired from the factory. If re-pairing is needed:

1. Ensure both the remote and receiver are turned off.
2. Press and hold the power button on the receiver until the LED light flashes rapidly.
3. While the receiver LED is flashing, press any training mode button (Beep, Vibration, or Shock) on the remote.
4. The receiver LED will stop flashing and remain solid, indicating successful pairing.
5. If pairing two collars, switch the channel on the remote (1 or 2) and repeat the process for the second receiver.

4.3 Fitting the Collar

Proper fit is crucial for effective and safe operation.

1. Ensure the collar is turned off before fitting.
2. Place the receiver on your dog's neck so that the contact points are underneath, touching the skin.
3. Adjust the strap to be snug, but not too tight. You should be able to fit one to two fingers between the collar and your dog's neck.
4. If your dog has long or thick fur, you may need to trim the fur around the contact points to ensure direct



skin contact.

5. Use the appropriate length of contact points (short for short fur, long for long fur) and attach the silicone conductive caps for comfort and safety.

Replaceable & Adjustable Collar Strap

If you have to cut the strap, please use a lighter to gently singe the edge to prevent fraying.

For Dog's Neck: 0-24 inches

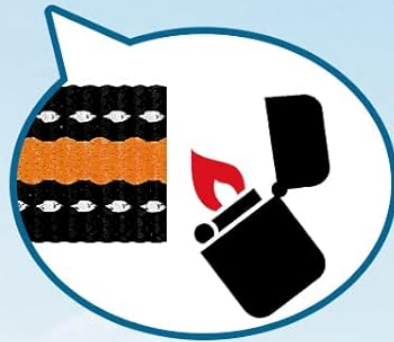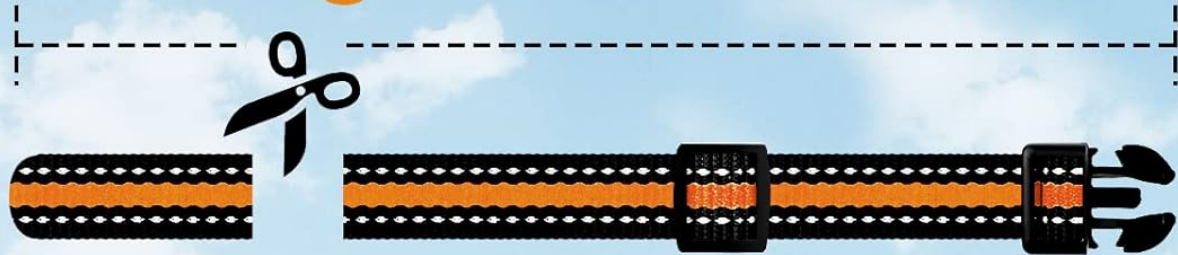

120lbs

5lbs



Image 4.1: Adjustable Collar Strap for Neck Sizes 0-24 inches



Image 4.2: Safe & Comfortable Silicone Prongs

5. OPERATING INSTRUCTIONS

5.1 Training Modes

The remote offers three distinct training modes, each with adjustable intensity levels:

- **Beep Mode (1-8 Levels):** Delivers an audible tone. Useful for attracting attention or as a warning.
- **Vibration Mode (1-16 Levels):** Provides a tactile vibration. A gentle reminder or a stronger deterrent depending on the level.
- **Safe Shock Mode (1-99 Levels):** Delivers a static correction. Use with caution and only when necessary, starting at the lowest effective level.

To select a mode, press the corresponding button on the remote. To adjust the level, rotate the dial on the top of the remote. The current mode and level will be displayed on the remote's screen.



Image 5.1: Remote Mode and Level Adjustment

5.2 Remote Control Features

- **Security Lock:** The remote features an ON/OFF switch to prevent accidental activation of training modes, ensuring safety when carried in a pocket or bag.
- **Dual Channel:** Easily switch between Channel 1 and Channel 2 to control two separate receiver collars simultaneously.

- **Long Range:** The remote operates effectively up to 3300 feet (1100 yards), providing ample range for various training environments.



Image 5.2: Remote Control Range

6. WATERPROOF INFORMATION

The receiver collar is designed with IP67 waterproof technology, meaning it can withstand submersion in water up to 1 meter for 30 minutes. This allows your dog to wear the collar during swimming, bathing, or in rainy conditions without affecting its functionality.

Video 6.1: Demonstration of the receiver collar's IP67 waterproof capability. The video shows the receiver submerged in water while still functioning normally.

Important Note: The remote transmitter is NOT waterproof. Please keep the remote away from water to prevent damage.

IP67 Waterproof and Compact Receiver

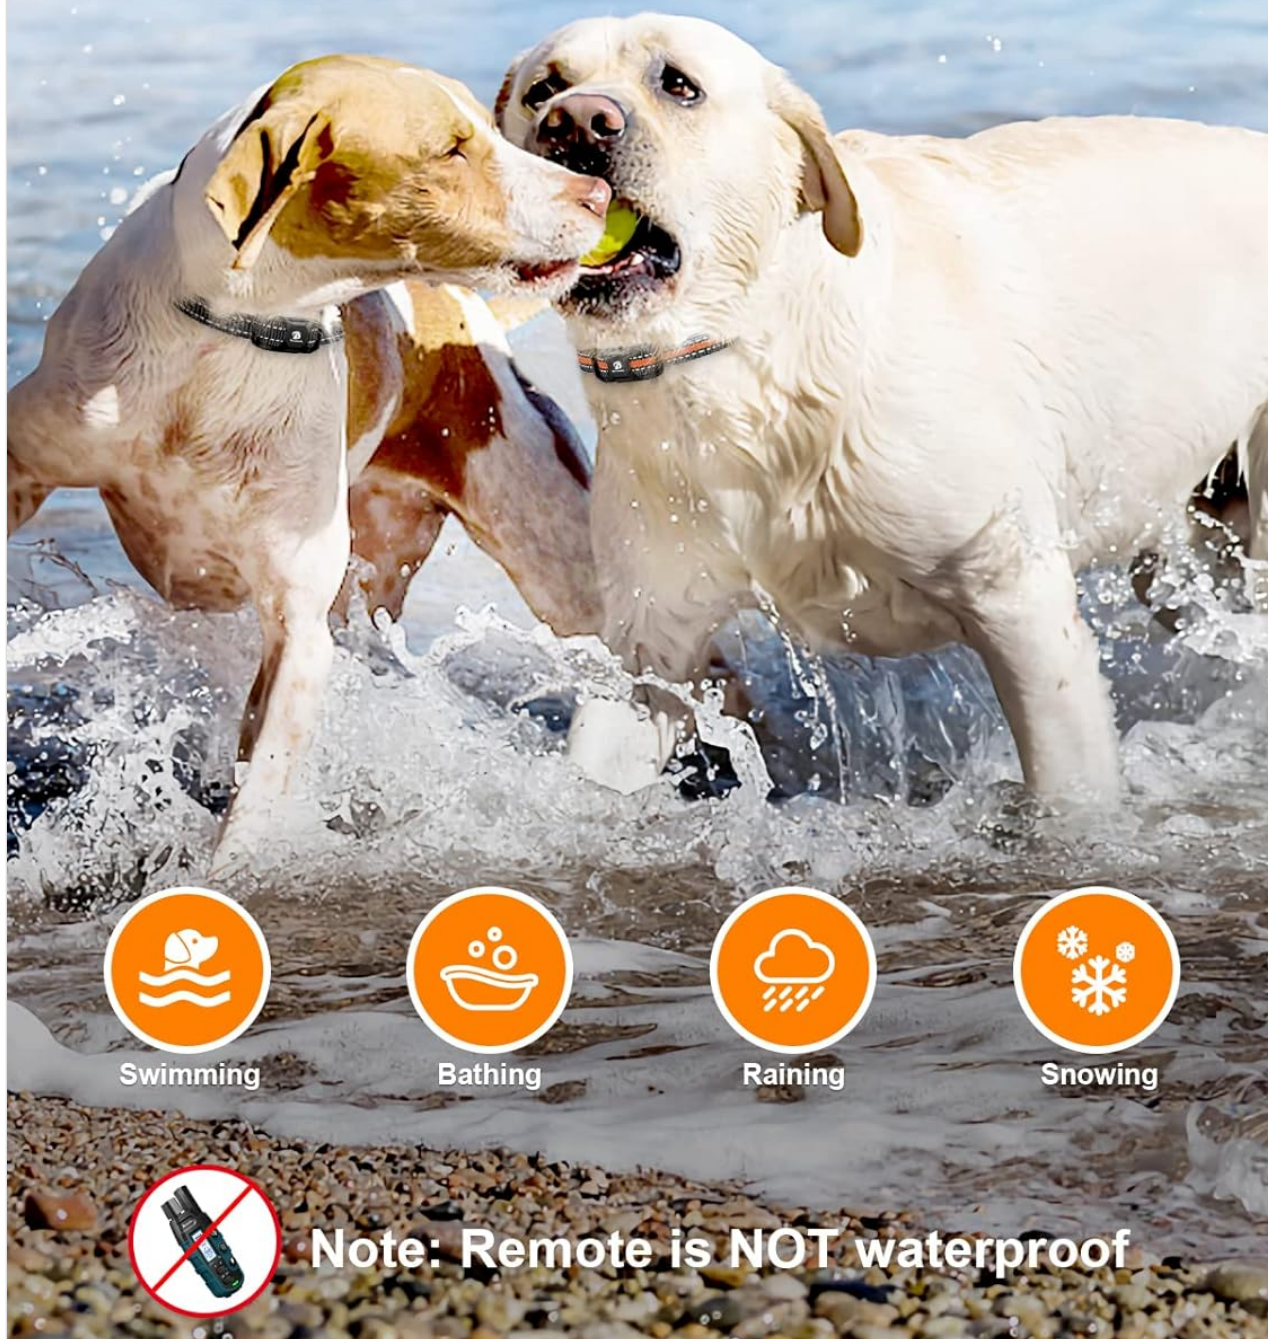


Image 6.1: IP67 Waterproof Receiver

IP67 Waterproof



Image 6.2: Dog Enjoying Water with Collar

7. MAINTENANCE

- **Cleaning:** Regularly clean the receiver and contact points with a damp cloth. Ensure no dirt or debris accumulates around the contact points, as this can affect performance.
- **Strap Care:** Inspect the nylon strap for wear and tear. If you need to cut the strap to size, use a lighter to gently singe the cut edge to prevent fraying.

Reflective Nylon Collar

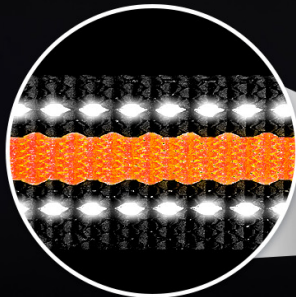


Image 7.1: Reflective Nylon Collar

- **Storage:** Store the collar and remote in a cool, dry place when not in use. Avoid extreme temperatures.
- **Battery Life:** To prolong battery life, avoid fully discharging the devices frequently. Charge them when the battery indicator is low.

8. TROUBLESHOOTING

Problem	Possible Cause	Solution
Collar not responding to remote	Low battery on remote or receiver; Not paired; Out of range; Remote security lock engaged.	Charge both devices; Re-pair remote and receiver; Move closer to the dog; Disengage security lock.

Problem	Possible Cause	Solution
No static correction	Poor contact with skin; Level too low; Fur interference; Test light not used correctly.	Adjust collar fit; Use longer contact points; Trim fur; Use test light to verify function.
Collar turns off unexpectedly	Low battery; Automatic power-saving mode.	Recharge the collar; This is normal behavior for power saving.
Remote screen is blank	Low battery; Remote is off.	Charge the remote; Turn the remote on.

9. SPECIFICATIONS

Feature	Detail
Model Number	RS2B
Remote Range	Up to 3300 feet (1100 yards)
Receiver Waterproof Rating	IP67
Training Modes	Beep (1-8 levels), Vibration (1-16 levels), Shock (1-99 levels)
Battery Type	Lithium Ion (included)
Charging Time	2-3 hours
Working Time	15-60 days (depending on usage)
Dog Weight Range	5-120 lbs
Collar Material	Nylon, Plastics
Item Weight	14.8 ounces
Product Dimensions	24 x 1.3 x 0.04 inches (collar)

10. SAFETY INFORMATION & IMPORTANT NOTES

- This product is intended for dog training purposes only. Do not use on aggressive dogs or for any other purpose.
- Do not leave the collar on your dog for more than 12 hours per day. Prolonged wear can lead to skin irritation.
- Regularly check your dog's neck for signs of irritation or sores. If irritation occurs, discontinue use until the skin heals.
- Always start with the lowest effective stimulation level and gradually increase if necessary.
- Ensure the collar fits properly, allowing one to two fingers between the collar and your dog's neck, to

prevent discomfort or chewing.

- The product comes with a USB charging cable (adapter not included). Use any 5V phone charger or power bank for charging.
- Keep away from children.




Image 10.1: Important Usage Attention






11. WARRANTY AND SUPPORT

Bousnic stands behind the quality of its products. For any questions, concerns, or warranty claims, please contact Bousnic customer support through the retailer's platform or the official Bousnic website. Please have your product model number (RS2B) and purchase details ready for faster assistance.

© 2024 BOUSNIC. All rights reserved.

Related Documents - RS2B

	<p>Bousnic Dog Training Collar RS2 User Manual and Quick Start Guide</p> <p>This document provides a comprehensive user manual and quick start guide for the Bousnic Dog Training Collar Model RS2. It covers important safety information, setup instructions, product overview, training modes, fitting the receiver, pairing procedures, indicator definitions, troubleshooting, and FCC statements.</p>
---	---

 <p>Bousnic Dog Training Guide Basic Obedience Training with Bousnic E-Collar</p> <p>1</p>	<p>Bousnic Dog Training Guide: Basic Obedience Training with E-Collar</p> <p>A comprehensive guide to using the Bousnic E-Collar for basic obedience training, addressing unwanted behaviors like jumping, digging, chasing, and trash raiding. Includes instructions on finding the right stimulation level, teaching commands, general tips, terms of use, FAQs, and troubleshooting.</p>
 <p>Bousnic Dog Training Guide Basic Obedience Training with Bousnic E-Collar</p> <p>1</p>	<p>Bousnic E-Collar Dog Training Guide: Basic Obedience and Behavior Correction</p> <p>A comprehensive guide to using the Bousnic E-Collar for basic dog obedience training, including commands like 'Sit', 'Come', and 'Stay', as well as addressing unwanted behaviors such as jumping, digging, chasing, and trash raiding. The guide also covers finding the right stimulation level, general tips, troubleshooting, and terms of use.</p>
 <p>Bousnic Dog Training Guide Basic Obedience Training with Bousnic E-Collar</p> <p>1</p>	<p>Bousnic Dog Training Guide: Basic Obedience and E-Collar Training</p> <p>Comprehensive guide to basic obedience training for dogs using the Bousnic E-Collar. Learn how to use stimulation levels, teach commands like Sit, Come, Stay, and address unwanted behaviors such as jumping, digging, chasing, and trash raiding. Includes troubleshooting and FAQs.</p>
 <p>Bousnic DOG TRAINING COLLAR Model: OBT3</p>	<p>Bousnic OBT3 Dog Training Collar: User Manual and Safety Guide</p> <p>This comprehensive user manual for the Bousnic OBT3 Dog Training Collar provides detailed instructions on setup, operation, various training modes (Dog Training, Bark Control), safety warnings, fitting guidelines, troubleshooting, and FAQs. Learn to use tone, vibration, and shock commands effectively and safely for your dog.</p>
 <p>Dog Training Collar User Manual Model: p-collar 670</p> <p>13.0.002.070000-00-01</p>	<p>Bousnic Dog Training Collar User Manual - Model p-collar 670</p> <p>Comprehensive user manual for the Bousnic p-collar 670 dog training collar, detailing package contents, product overview, safety information, operation instructions, training tips, troubleshooting, and warranty details.</p>