

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [ROJECO](#) /

› [ROJECO Dog Training Collar PD-521-2 Instruction Manual](#)

ROJECO PD-521-2

ROJECO Dog Training Collar PD-521-2 Instruction Manual

Model: PD-521-2 | Brand: ROJECO

IMPORTANT SAFETY INFORMATION

Please read all safety and training information before using your ROJECO Dog Training Collar. Proper use is essential for the safety and comfort of your dog.

- **Not for Aggressive Dogs:** Do not use this product on aggressive dogs. If your dog is aggressive, consult a professional dog trainer.
- **Proper Fit:** Ensure the collar fits snugly but not too tightly. Two fingers should fit comfortably between the collar and your dog's neck. An improperly fitted collar can cause skin irritation.
- **Avoid Prolonged Wear:** Do not leave the collar on your dog for more than 18 hours per day. Prolonged wear can lead to pressure necrosis (collar sores).
- **Skin Inspection:** Regularly inspect your dog's neck for signs of irritation, redness, or sores. If irritation occurs, discontinue use and consult a veterinarian.
- **Charging Precautions:** Use only a charging adapter with a parameter of $5V\pm1A$. Higher current may damage the circuit. Ensure the charging port is sealed with the rubber cover when not charging, especially during water activities.
- **Supervised Use:** Always supervise your dog during training sessions.

PRODUCT OVERVIEW

The ROJECO Dog Training Collar system includes a remote transmitter and a receiver collar, designed to assist in training your dog with three safe and effective modes: Beep, Vibration, and Static Shock. The remote features a clear digital display for easy mode and intensity selection, while the receiver collar is IPX7 waterproof for versatile use.



Image: Detailed overview of the remote control and receiver collar components.

PACKAGE CONTENTS

Upon opening your ROJECO Dog Training Collar package, you should find the following items:

- 1 x Receiver Collar
- 1 x Adjustable Nylon Collar Strap
- 1 x Remote Control
- 1 x Test Lamp
- 1 x USB Charger Cable
- 2 x Long Contact Points
- 2 x Short Contact Points
- 4 x Conductive Silicone Caps
- 1 x Instruction Manual (this document)



Image: All components included in the ROJECO Dog Training Collar package.

PRODUCT FEATURES

The ROJECO Dog Training Collar is equipped with several features to enhance your dog training experience:

- **3 Training Modes:** Offers Beep, Vibration, and Static Shock modes. The static shock mode has 16 adjustable intensity levels.

- **IPX7 Waterproof Receiver:** The receiver collar is fully waterproof, allowing your dog to swim, play in the rain, or bathe without damaging the device.
- **Extended Range:** The remote control operates up to 3300 feet in open areas and up to 1968 feet in areas with barriers, providing ample space for training.
- **Long-Lasting Rechargeable Battery:** The receiver has a 650mAh battery, offering up to 30 days of working time. The remote has a 300mAh battery, providing up to 60 days of standby time. Both units fully charge within 2 hours.
- **Adjustable Collar for All Sizes:** The nylon collar is adjustable to fit dogs weighing between 4 and 120 lbs. It also features 360° reflective straps for increased visibility at night.
- **Safety Certified:** The product is certified by FCC, ROHS, and CE, ensuring safety and quality standards. Conductive silicone covers are included to protect your dog's skin.



Image: Illustration of the three training modes: Vibrate, Shock (1-16 levels), and Beep.

100% IPX7 Waterproof

Swimming Raining Bathing



Image: A dog swimming, demonstrating the IPX7 waterproof capability of the receiver collar.

Long Control Range



180 up to DAYS
Standby Time

60 up to DAYS
Work Time



180 up to DAYS
Standby Time

30 up to DAYS
Work Time

3300ft



Image: Visual representation of the 3300ft long control range in an outdoor setting.

Fast Charging & Long Battery Life

180 Days
Standby Time

30 Days
Work Time

2 Hour
Quick Charge



Easy Charging by Your PC/Laptop/Phone Charger/Power Bank


Note: Easy Charged by USB-A to Type-C charging cable including in package

Image: Depiction of the fast charging and long battery life features for both the remote and receiver.

Adjustable for All Size Dogs



4-120lbs

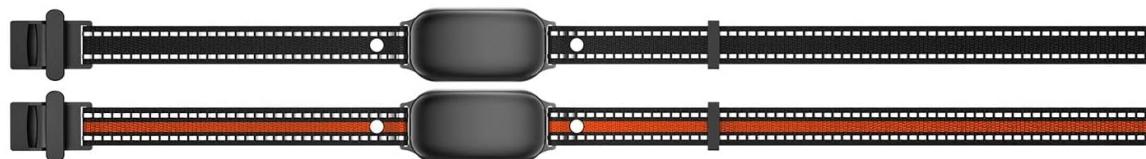

for long hair dog



for short hair dog



Note: Please avoid leaving the collar on dog for more than 18 hours per day

Image: Various dog breeds illustrating the adjustable nature of the collar for different sizes, along with contact point options for long and short-haired dogs.

SETUP

1. Charging the Devices

Before first use, fully charge both the remote control and the receiver collar. Use the provided USB charger cable.

- Connect the USB cable to the charging port on both the remote and receiver.
- Plug the other end into a $5V \pm 1A$ USB power adapter (not included) or a computer USB port.
- Charging indicators will show progress (e.g., blinking light). Once fully charged (approx. 2 hours), the indicator light will change or stop blinking.
- Ensure the rubber cover on the receiver's charging port is securely closed after charging to maintain its waterproof integrity.

2. Attaching Contact Points and Silicone Caps

Select the appropriate contact points based on your dog's coat length:

- Use **long contact points** for dogs with thick or long hair.

- Use **short contact points** for dogs with short hair.

Screw the chosen contact points into the receiver. Then, place the conductive silicone caps over the contact points to enhance comfort and prevent skin irritation.

3. Fitting the Receiver Collar

Proper fit is crucial for the collar's effectiveness and your dog's comfort.

- Place the receiver collar around your dog's neck, ensuring the contact points are positioned underneath, making direct contact with the skin.
- Adjust the strap so it is snug but not tight. You should be able to fit two fingers comfortably between the collar and your dog's neck.
- The collar should not be loose enough to rotate around the neck.

OPERATING INSTRUCTIONS

1. Power On/Off

- **Remote:** Press and hold the power button on the side of the remote until the screen illuminates.
- **Receiver:** Press and hold the power button on the receiver collar until the LED indicator light turns on.
- To power off, press and hold the respective power buttons until the devices shut down.

2. Selecting Channels

The remote supports up to 3 channels, allowing you to train multiple dogs with one remote.

- Press the 'Channel' button on the side of the remote to cycle through channels 1, 2, or 3.
- Ensure the receiver collar is paired to the selected channel.

3. Adjusting Static Shock Levels

The static shock mode has 16 adjustable intensity levels (1 being the lowest, 16 being the highest).

- Use the '+' and '-' buttons on the side of the remote to adjust the static shock level.
- Start with the lowest level and gradually increase until your dog responds without overreacting.

4. Using Training Modes

The remote has dedicated buttons for each training mode:

- **Vibration Mode:** Press the 'Vibration' button (wavy lines icon) to deliver a vibratory stimulation.
- **Static Shock Mode:** Press the 'Shock' button (lightning bolt icon) to deliver a static shock at the selected intensity level.
- **Beep Mode:** Press the 'Beep' button (speaker icon) to emit an audible tone.

Use these modes consistently to reinforce desired behaviors and correct unwanted ones.

Your browser does not support the video tag.

Video: Demonstrates the three training modes (Vibration, Beep, Shock) and the waterproof feature of the ROJECO Dog Training Collar.

MAINTENANCE

Proper maintenance ensures the longevity and effective operation of your training collar.

- **Cleaning:** Hand wash rubber, TPU, and silicone components with mild soap and lukewarm water. The nylon collar strap can be machine washed in cold water on a gentle cycle. Avoid harsh chemicals.
- **Regular Inspection:** Periodically check the receiver collar and remote for any damage, especially the contact points and charging ports.
- **Storage:** Store the collar and remote in a dry, cool place when not in use.

TROUBLESHOOTING

If you encounter issues with your ROJECO Dog Training Collar, try the following solutions:

- **Collar Not Responding:**
 - Ensure both the remote and receiver are powered on and fully charged.
 - Check if the remote and receiver are on the same channel.
 - Verify that the contact points are making proper contact with your dog's skin. Adjust the collar fit or use longer contact points if necessary.
- **Short Range:**
 - Ensure there are no significant obstacles (e.g., thick walls, dense foliage) between the remote and receiver.
 - Check battery levels on both devices. Low battery can affect range.
- **Skin Irritation:**
 - Remove the collar immediately.
 - Ensure the collar is not too tight and is not worn for more than 18 hours a day.
 - Clean your dog's neck and the contact points.
 - Consult a veterinarian if irritation persists.

SPECIFICATIONS

Feature	Detail
Model Name	PD-521-2
Brand	ROJECO
Training Modes	Beep, Vibration, Static Shock (1-16 levels)
Waterproof Rating	IPX7 (Receiver)
Remote Control Range	Up to 3300ft (free area), 1968ft (barrier area)
Receiver Battery Capacity	650mAh
Remote Battery Capacity	300mAh

Charging Time	Approx. 2 hours
Receiver Working Time	Up to 30 days
Remote Standby Time	Up to 60 days
Adjustable Collar Size	Fits dogs 4-120 lbs
Material	Nylon, Rubber, Silicone, Thermoplastic Polyurethane
Item Weight	0.34 Kilograms (approx. 12 ounces)
Certifications	FCC, ROHS, CE
Included Components	Receiver, Adjustable Collar, Remote Control, Test Light, USB Charger Cable, Contact Points, Silicone Caps, Instruction Manual

WARRANTY AND SUPPORT

ROJECO provides at least 1 year of service support for this product. If you encounter any problems or have questions regarding your ROJECO Dog Training Collar, please contact us via Amazon message. Our support team is available to assist you.