## GDLT 52-Jin-Shuijing

# GDLT 18-inch Crystal Caged Ceiling Fan User Manual

Model: 52-Jin-Shuijing

## 1. Introduction

This manual provides detailed instructions for the safe installation, operation, and maintenance of your GDLT 18-inch Crystal Caged Ceiling Fan. Please read this manual thoroughly before installation and retain it for future reference. This ceiling fan features a 4-light design, a reversible DC motor, and 6-speed settings, controlled by a remote.

## 2. Safety Information

- Always disconnect power at the circuit breaker before installation or servicing.
- Ensure all electrical connections comply with local codes and ordinances. If you are unsure, consult a qualified electrician.
- The fan must be mounted to a ceiling joist or support capable of supporting a minimum of 35 lbs (15.9 kg).
- Do not bend the fan blades during installation or cleaning.
- Ensure the fan is installed at a height where blades are at least 7 feet (2.1 meters) from the floor.
- Use only E26 base bulbs, maximum 60W each. Bulbs are not included.

## 3. Package Contents

Verify that all components are present and undamaged before beginning installation.

- Ceiling Fan Body with Crystal Cage
- Downrod (various lengths may be included)
- Canopy
- Remote Control
- Mounting Hardware (screws, wire nuts, etc.)
- Instruction Manual




Figure 3.1: Exploded view of the ceiling fan components.

## 4. Setup and Installation

Professional installation is recommended. Ensure power is OFF at the circuit breaker before proceeding.

1. **Assemble the Downrod:** Securely attach the downrod to the fan motor housing. Ensure all screws are tightened.
2. **Install Ceiling Light Canopy:** Mount the ceiling light canopy to the junction box in the ceiling using appropriate screws.
3. **Hang the Light Kit:** Carefully lift the fan assembly and hang it onto the mounting bracket. Rotate it into the slot to secure it temporarily.
4. **Wiring Connections:** Connect the electrical wires according to the wiring diagram provided in the full manual and local electrical codes. Typically, this involves connecting live, neutral, and ground wires.
5. **Secure Canopy:** Push the canopy up to the ceiling and secure it with the provided screws.
6. **Install Bulbs:** Screw four E26 base bulbs (not included) into the sockets. Ensure bulbs are of appropriate size and

wattage (max 60W each).

Your browser does not support the video tag.

Video 4.1: Official GDLT installation guide for the Crystal Caged Ceiling Fan. This video demonstrates the assembly of the downrod, mounting the canopy, hanging the fan, and installing the bulbs.

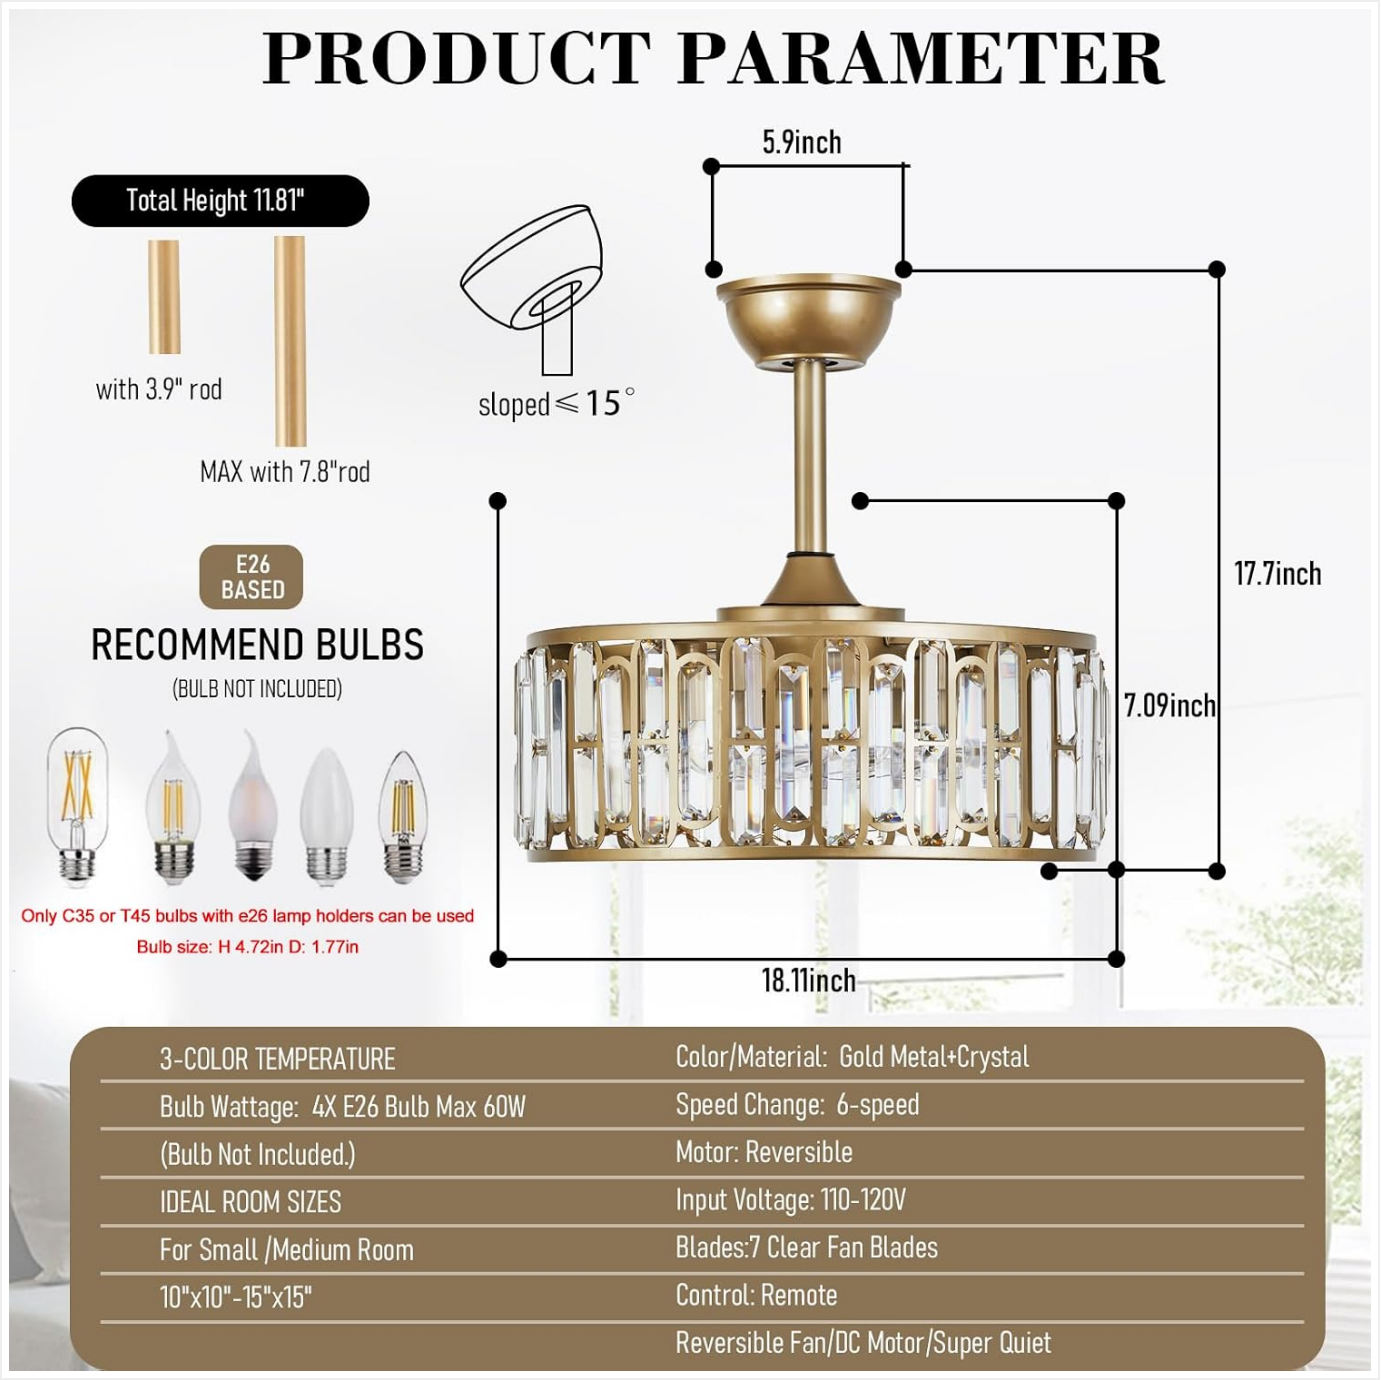



Figure 4.2: Product details highlighting key components like the gold chassis, K9 crystals, and fan blades.

## 5. Operating Instructions

The ceiling fan is operated using the included remote control. Ensure the remote has working batteries.

### 5.1 Remote Control Functions




Figure 5.1: Remote control layout and functions.

- **ALL OFF:** Turns off both the light and the fan.
- **LIGHT ON/OFF Button:** Controls the light independently.
- **Fan Speed (1-6):** Adjusts the fan speed from gentle breeze (1-2) to strong wind (5-6).
- **Timer Setting (1H/2H/4H/8H):** Sets the fan to turn off automatically after 1, 2, 4, or 8 hours.
- **Fan Reversal (F/R):** Changes the direction of the fan blades.
- **Natural Wind:** Simulates natural wind patterns by varying fan speed.

## 5.2 Reversible Motor Function

The fan features a reversible DC motor for year-round comfort.

- **Summer Mode (Counter-clockwise):** Creates a downward airflow, providing a cooling effect.
- **Winter Mode (Clockwise):** Creates an upward airflow, circulating warm air evenly throughout the room.



Figure 5.2: Reversible motor function for seasonal use.

## 6. Maintenance

Regular maintenance ensures optimal performance and longevity of your ceiling fan.

- **Cleaning:** To clean the fan, wipe with a soft, damp cloth. Do not use abrasive cleaners or solvents. Ensure power is off before cleaning.
- **Bulb Replacement:** Turn off power before replacing bulbs. Allow bulbs to cool completely. Replace with E26 base bulbs, maximum 60W each.
- **Tighten Fasteners:** Periodically check all screws and fasteners on the fan and mounting hardware to ensure they are secure.

## 7. Troubleshooting

If you encounter issues, refer to the following troubleshooting guide. If the problem persists, contact customer support.

| Problem | Possible Cause | Solution |
|---|---|---|
| Fan does not start | No power to the fan; Loose wire connections; Remote control battery low. | Check circuit breaker; Verify all wire connections are secure; Replace remote control batteries. |
| Light flickers or does not turn on | Loose bulb; Incorrect bulb type/wattage; Faulty wiring. | Ensure bulbs are screwed in tightly; Use E26 max 60W bulbs; Check wiring connections. |
| Fan makes noise | Loose screws; Fan not properly balanced; Obstruction. | Tighten all screws; Ensure fan is securely mounted; Check for any objects interfering with the fan blades. |
| Remote control not working | Low battery; Remote not paired. | Replace remote batteries; Refer to the full manual for remote pairing instructions. |

## 8. Specifications

Detailed technical specifications for the GDLT Crystal Caged Ceiling Fan.

| Feature | Specification |
|---|---|

| Feature | Specification |
| --- | --- |
| Brand | GDLT |
| Model Number | 52-Jin-Shuijing |
| Product Dimensions | 18"L x 18"W x 7.09"H |
| Material | Metal + Crystal |
| Color | Gold Crystal |
| Light Source Type | LED (Bulbs not included) |
| Number of Light Sources | 4 |
| Bulb Base | E26 (Max 60W each) |
| Voltage | 110 Volts |
| Control Method | Remote Control |
| Fan Speeds | 6 Speeds |
| Motor Type | Reversible DC Motor |
| Timer Options | 1/2/4/8 Hours |
| Item Weight | 13.45 Pounds |
| Recommended Room Size | 50-160 square feet |




Figure 8.1: Product dimensions and bulb recommendations.

## 9. Warranty and Support

GDLT provides comprehensive support for your product.

- **Warranty:** The product includes a 1-year quality assurance. This covers free replacement service for products and free replacement for accidentally damaged parts within the warranty period.
- **Customer Support:** A professional service team is available to assist with product installation and usage questions. For any inquiries, please contact us, and we will provide solutions within 24 hours.


### Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

**Name**

Anonymous

**Email**

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

**Question**

Example: How do I reset this device or fix this error?

**Details**

Model number, symptoms, what you tried, or the section of the manual you are using.

**Submit question**