

## Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [TMY](#) /

› [TMY V68 Native 1080P Projector User Manual](#)

## TMY V68

# TMY V68 Native 1080P Projector User Manual

Model: V68

## INTRODUCTION

Thank you for choosing the TMY V68 Native 1080P Projector. This manual provides essential information for setting up, operating, and maintaining your projector to ensure optimal performance and longevity. The TMY V68 is designed to deliver a high-quality home theater experience with its native 1080P resolution, 4K support, 5G WiFi, and Bluetooth 5.1 connectivity.

## WHAT'S IN THE BOX

Please check the package contents to ensure all items are present:

- TMY V68 Projector
- Power Cord
- HDMI Cable
- Cleaning Kit
- Remote Control
- User Manual (this document)

## PRODUCT OVERVIEW

Familiarize yourself with the components of your TMY V68 Projector.



**Figure 1:** Front view of the TMY V68 Projector, highlighting its native 1080P resolution, 4K support, 5G WiFi, and Bluetooth 5.1 capabilities.

Native

**1080P**

**4K Support**

The picture is clear and delicate



**5G+2.4G**

**WiFi**

No lagging movie viewing

**3W**

**Bass speaker**

No need to connect additional speakers

**150ANSI**

**Lumen**

Get clear image even on clear nights

**5.1**



**Bluetooth**

Enjoy cinema-quality sound anytime, anywhere


**300"**

**large display**


Adjust the display size at will from 40 to 300 inches

Figure 2: Key features of the TMY V68 Projector, including Native 1080P resolution with 4K support, dual-band 5G+2.4G WiFi, a 3W bass speaker, 150 ANSI lumens brightness, Bluetooth 5.1, and a large display size up to 300 inches.

#### Projector Ports and Controls:

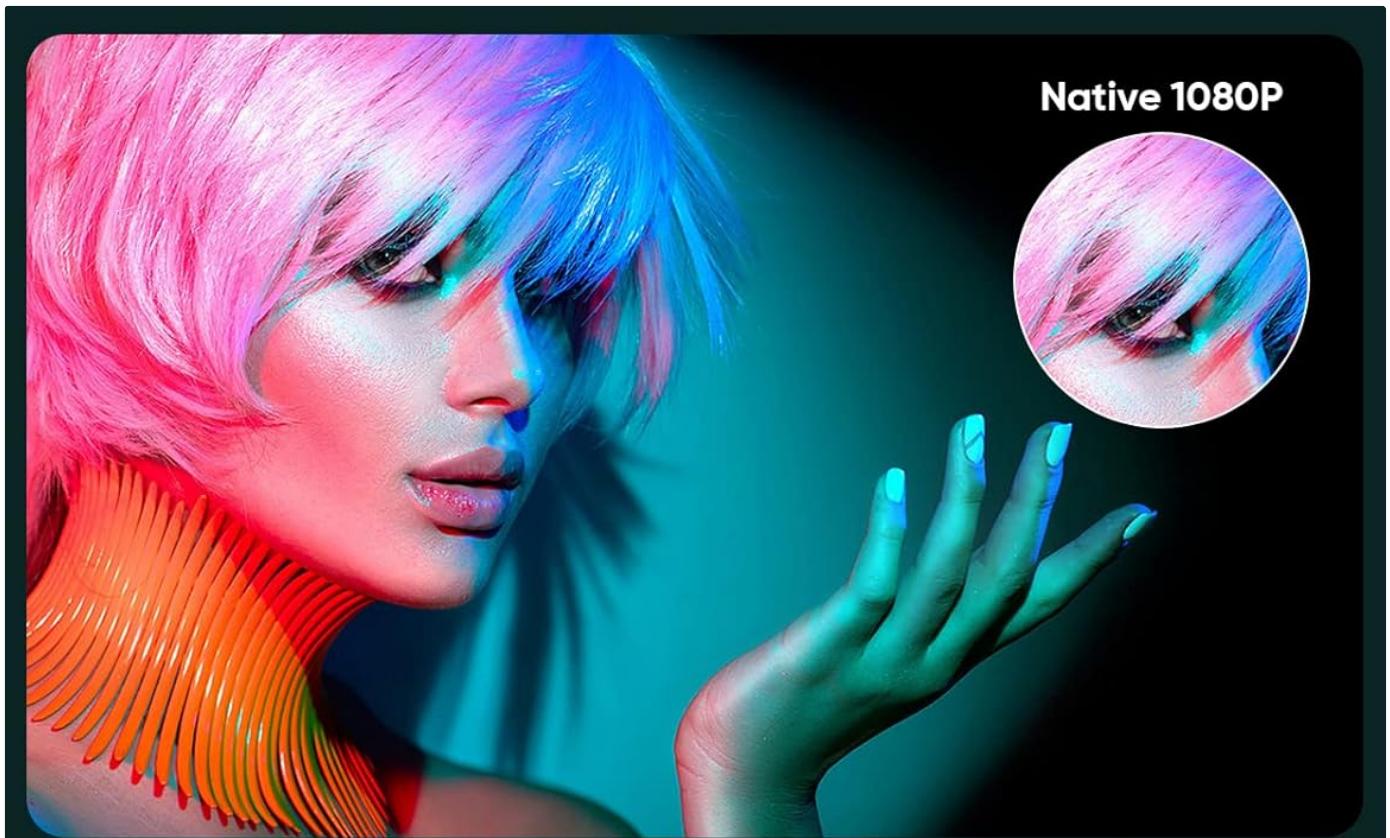

**Native 1080P** Brilliant picture, clear details

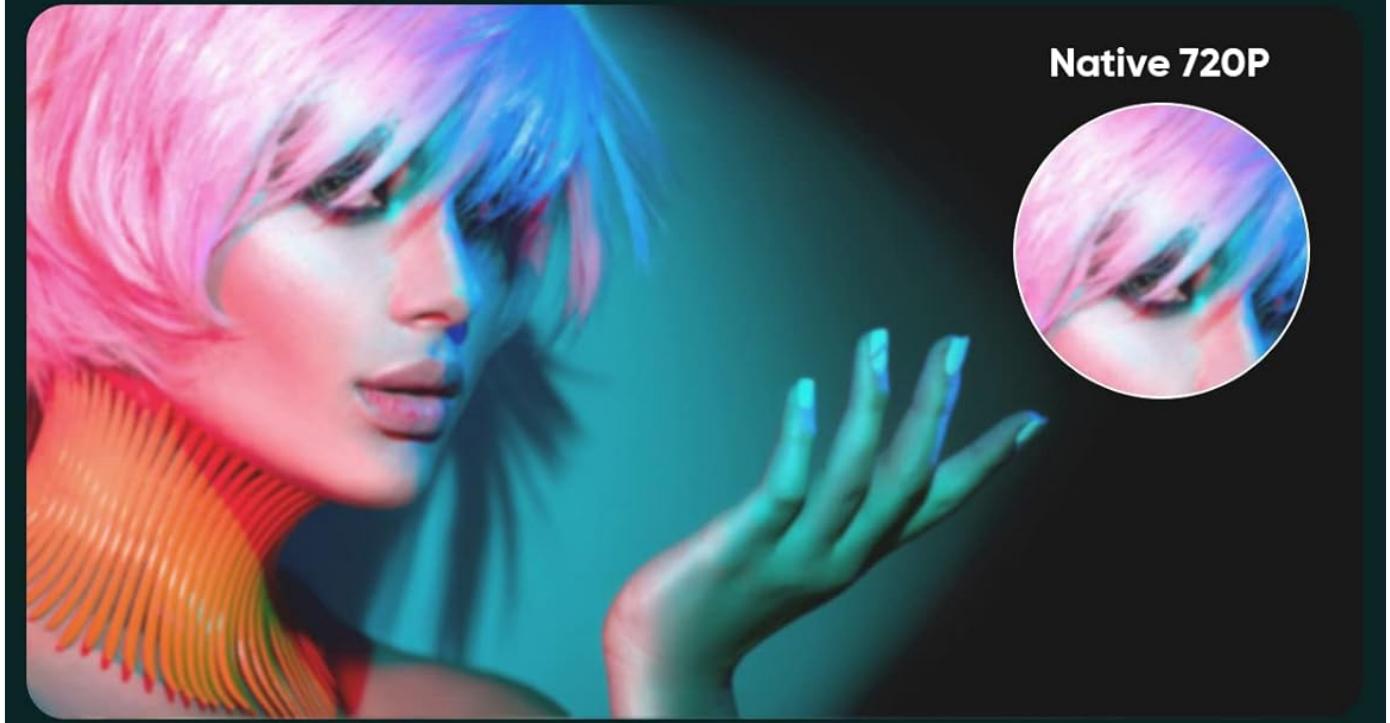

**Native 720P** Colors are dim and details are blurred

**Figure 3:** The input panel of the TMY V68 Projector, featuring USB, two HDMI ports, AV, AUX, and an SD Card slot for versatile connectivity.

- **Lens:** Projects the image onto the screen.
- **Focus Ring:** Adjusts image clarity.
- **Keystone Correction:** Corrects trapezoidal distortion of the image.
- **Power Button:** Turns the projector on/off.

- **HDMI Ports (x2):** Connect to devices like laptops, game consoles, TV sticks.
- **USB Port:** Connect USB drives for media playback.
- **SD Card Slot:** Insert SD cards for media playback.
- **AV Port:** Connect to older devices using an AV cable.
- **AUX (3.5mm Audio Out):** Connect external speakers or headphones.
- **Power Input:** Connect the power cord.

## SETUP

---

### 1. Power Connection:

1. Connect the power cord to the projector's power input port.
2. Plug the other end of the power cord into a power outlet.
3. Press the power button on the projector or remote control to turn it on.

### 2. Positioning and Image Adjustment:

Place the projector on a stable, flat surface or mount it appropriately. Ensure the projection surface is smooth and white for best results.

- **Focus Adjustment:** Rotate the focus ring on the projector lens until the projected image is clear and sharp.
- **Keystone Correction:** Adjust the keystone correction dial or setting to correct any trapezoidal distortion, ensuring the image is rectangular. The projector supports  $\pm 15^\circ$  keystone correction.
- **Projection Size:** The projector can display an image from 30 to 300 inches. Adjust the distance from the screen to achieve your desired size.

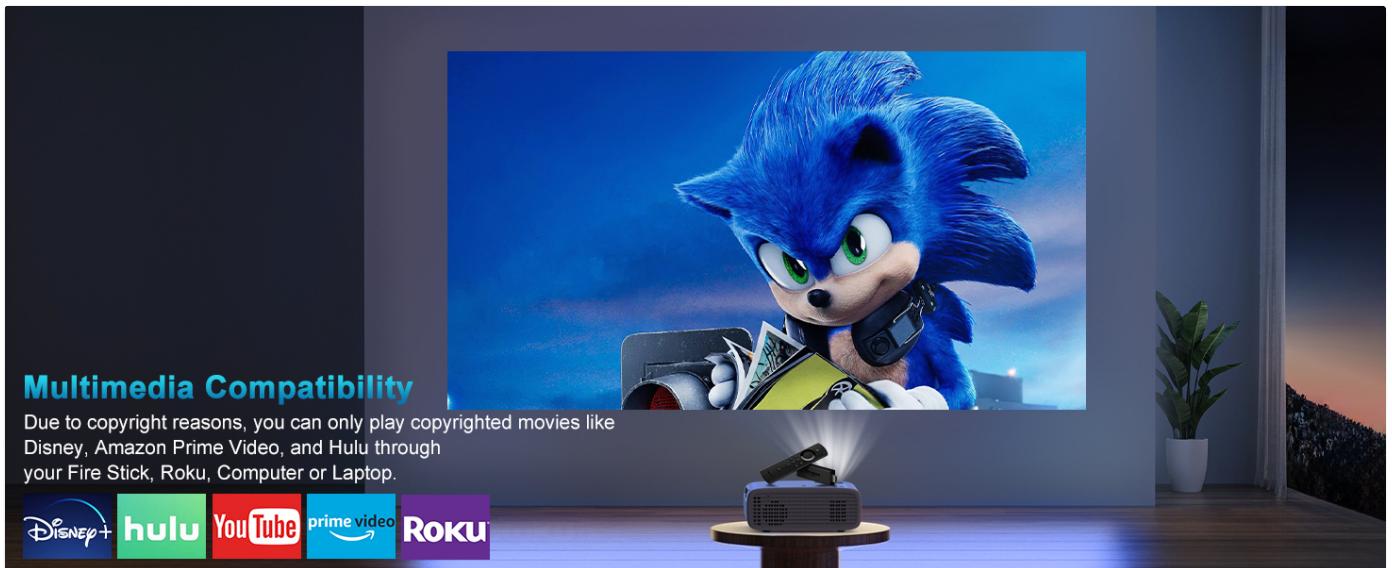



Figure 4: Illustration of the projector's electric keystone correction feature, allowing for a  $\pm 15^\circ$  adjustment to ensure a perfectly rectangular image.

### 3. Connecting Input Devices:

The TMY V68 projector offers multiple connectivity options:

- **HDMI:** Connect your TV Stick, laptop, game console (PS4, Xbox), or DVD player using an HDMI cable. Select the corresponding HDMI input source on the projector.
- **USB:** Insert a USB flash drive into the USB port to play videos, photos, or music directly.
- **SD Card:** Insert an SD card into the SD card slot to play media files.

- **AV:** Use the AV cable to connect older devices like VCRs or some DVD players.

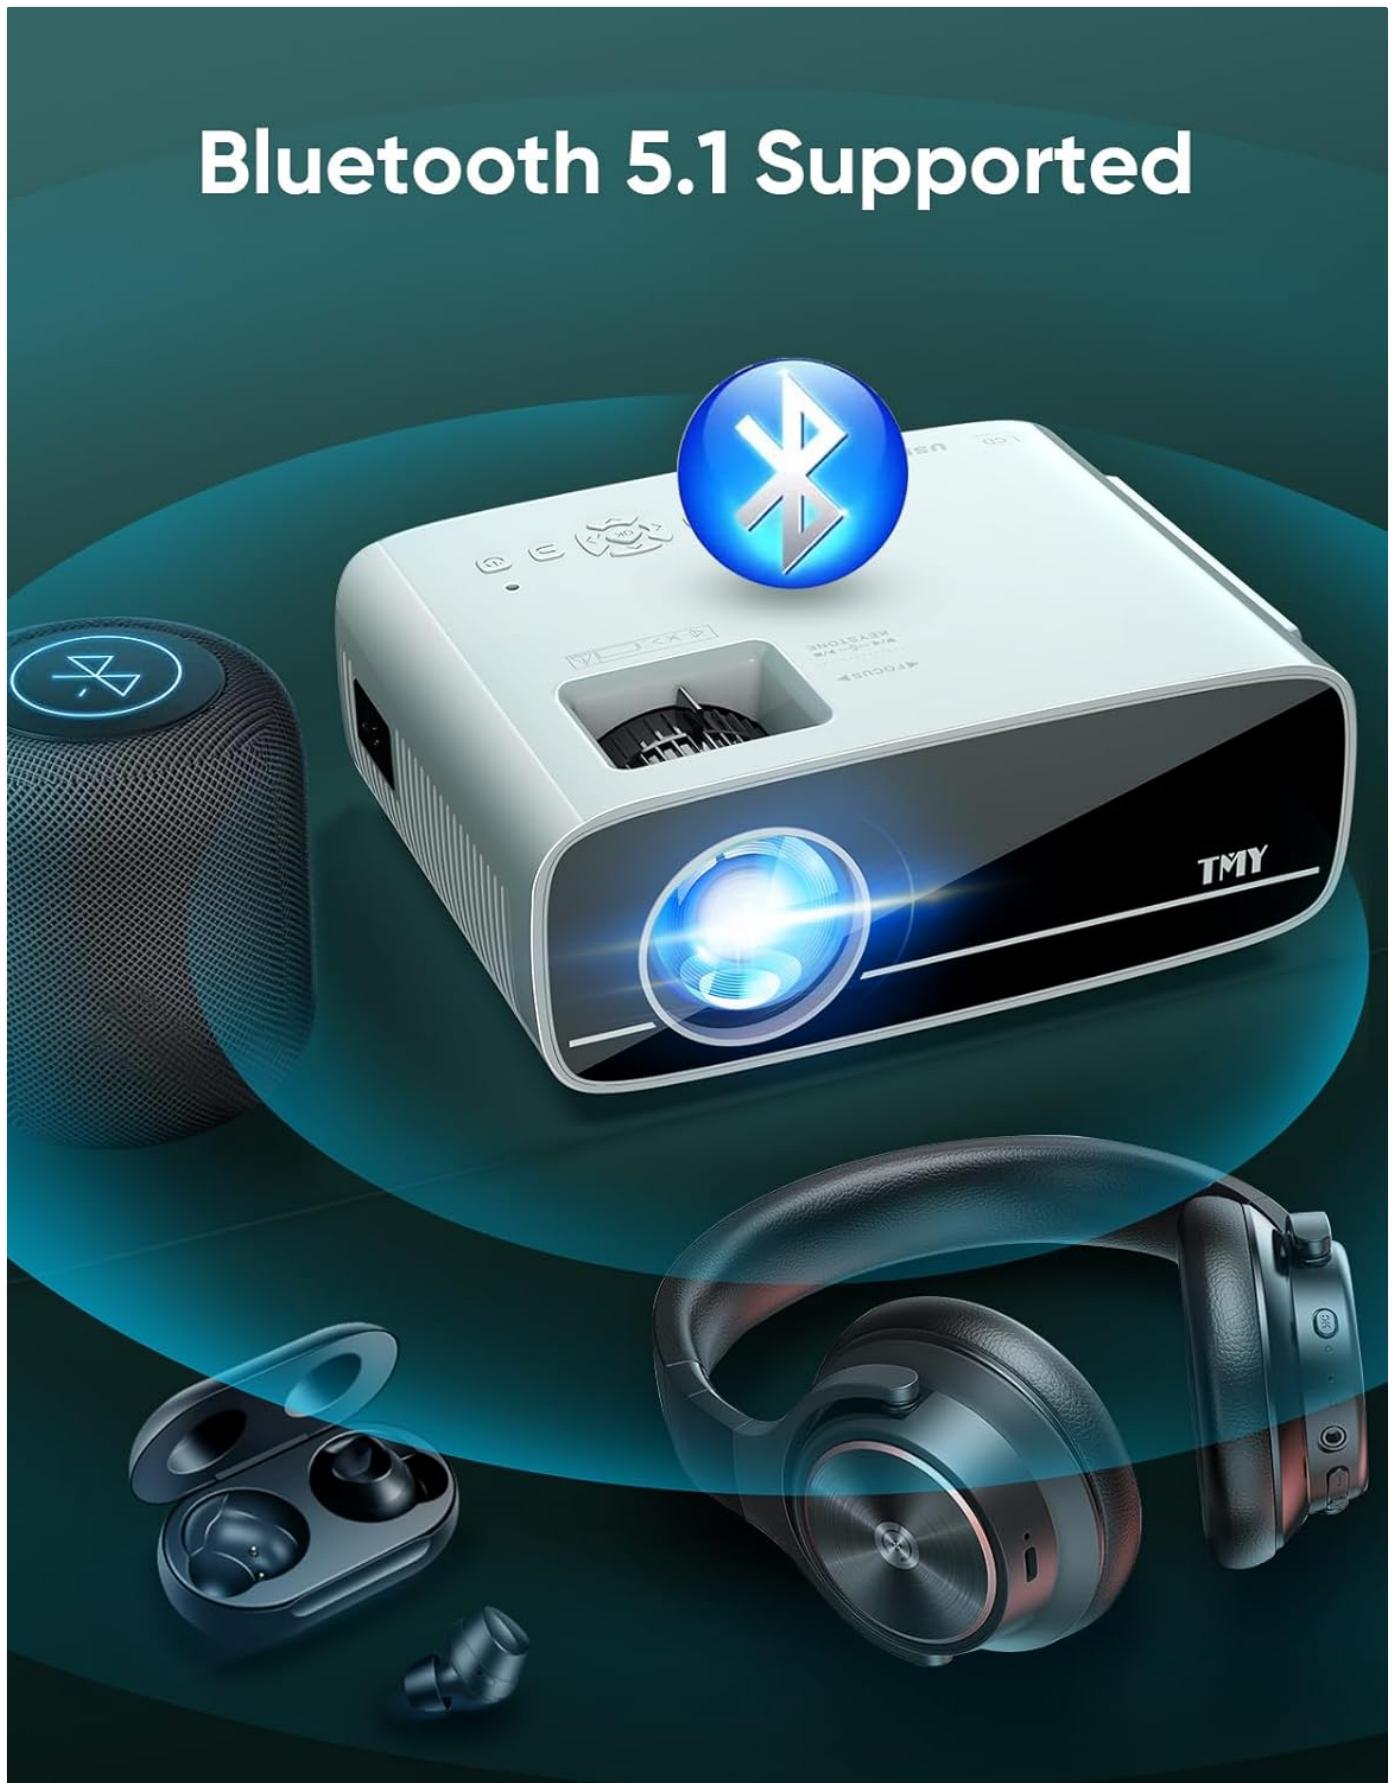

**Figure 5:** The TMY V68 Projector demonstrating its compatibility with multiple devices such as gaming consoles, laptops, and smartphones via USB, HDMI, AV, and AUX inputs.

#### 4. Network Connection (5G WiFi):

The projector supports 5G WiFi for faster and more stable screen mirroring.

1. Navigate to the WiFi settings on the projector's main menu.
2. Select your desired 5G WiFi network from the list.
3. Enter the WiFi password using the on-screen keyboard and remote control.
4. Once connected, you can use the screen mirroring function.



**Figure 6:** Demonstrating the projector's 5G+2.4G WiFi connectivity for ultra-fast and stable screen mirroring from a smartphone to the large projected display.

## 5. Bluetooth Pairing:

Connect external Bluetooth speakers or headphones for enhanced audio.

1. Ensure your Bluetooth audio device is in pairing mode.
2. On the projector, go to the Bluetooth settings menu.
3. Select your Bluetooth device from the list of available devices.
4. Confirm the pairing. Audio will now be routed through the connected Bluetooth device.



**Figure 7:** The TMY V68 Projector's two-way Bluetooth 5.2 capability, allowing connection to external speakers or headphones for a superior audio experience, or even using the projector as a Bluetooth speaker.

## OPERATING INSTRUCTIONS

## 1. Basic Operation:

- **Power On/Off:** Press the power button on the projector or remote control.
- **Navigation:** Use the arrow keys and OK button on the remote control to navigate the projector's menu.
- **Volume Control:** Use the volume buttons on the remote to adjust the sound level.

## 2. Input Source Selection:

From the main menu, select the desired input source (HDMI1, HDMI2, USB, SD, AV, Screen Mirroring) corresponding to your connected device.

## 3. Screen Mirroring (Wireless Projection):

The TMY V68 supports wireless screen mirroring for iOS and Android devices via 5G WiFi.

- Ensure your projector and mobile device are connected to the same WiFi network.
- Select "Screen Mirroring" or "Wireless Projection" from the projector's main menu.
- For iOS devices, open Control Center and tap "Screen Mirroring" or "AirPlay Mirroring," then select the projector.
- For Android devices, enable "Wireless Display," "Smart View," or "Cast" in your device settings, then select the projector.

**Note: Due to copyright restrictions, streaming services like Netflix, Amazon Prime Video, Hulu, etc., cannot be mirrored directly from your phone. To watch copyrighted content, connect a TV Stick (Fire TV Stick, Roku Stick), Chromecast, or use an HDMI connection from a laptop/PC.**



Figure 8: Multimedia compatibility of the projector, indicating that copyrighted content from services like Disney+, Amazon Prime Video, Hulu, and YouTube requires connection via a Fire Stick, Roku, computer, or laptop.

## 4. Audio Output:

The projector has a built-in speaker. For a more immersive audio experience, connect external speakers or headphones via the 3.5mm AUX port or Bluetooth.

## MAINTENANCE

---

### 1. Cleaning the Lens:

Use the provided cleaning kit or a soft, lint-free cloth to gently wipe the projector lens. Avoid using abrasive cleaners or harsh chemicals, as they can damage the lens coating.

## 2. General Care:

- Keep the projector in a clean, dust-free environment.
- Ensure proper ventilation around the projector to prevent overheating. Do not block the ventilation openings.
- When not in use, cover the lens with the lens cap to protect it from dust and scratches.
- Store the projector in a cool, dry place.

## 3. Lamp Life:

The TMY V68 projector features a long-lasting lamp with an estimated life of up to 120,000 hours, providing years of reliable use.



Figure 9: The projector's optical system, emphasizing its impressive 120,000-hour lamp life for extended usage.

## TROUBLESHOOTING

Problem	Possible Cause	Solution
No image displayed.	Power not connected; Incorrect input source; Loose cable connection.	Check power cord; Select correct input source (HDMI, USB, etc.); Ensure cables are securely connected.
Image is blurry.	Focus not adjusted; Projector too close/far from screen.	Adjust the focus ring; Adjust projection distance.
Image is trapezoidal.	Keystone not corrected.	Adjust the keystone correction setting.
No sound.	Volume too low; Muted; External audio device not connected/paired.	Increase volume; Unmute; Check external speaker/headphone connection or Bluetooth pairing.
Screen mirroring not working.	Not on same WiFi network; Copyright restrictions.	Ensure both devices are on the same 5G WiFi network; Use HDMI or TV stick for copyrighted content.

## SPECIFICATIONS

Feature	Detail

Feature	Detail
Brand	TMY
Model Number	V68
Native Resolution	1920 x 1080 (Full HD)
4K Support	Yes
Brightness	150 ANSI Lumens
Connectivity Technology	Bluetooth 5.1, Wi-Fi (5G & 2.4G), USB, HDMI (x2), 3.5mm Jack, AV, SD Card
Speaker Type	Built-In (3W Bass speaker)
Keystone Correction	±15°
Projection Size	30" - 300"
Aspect Ratio	4:3 / 16:9
Lamp Life	Up to 120,000 hours
Item Weight	10.6 ounces
Product Dimensions	8.86 x 6.89 x 3.35 inches
Color	White + Black
Recommended Uses	Home Cinema, Gaming

## WARRANTY AND SUPPORT

---

TMY is committed to providing accessible projector solutions and excellent customer service.

- Warranty:** The TMY V68 Projector comes with a 3-year warranty.
- Returns:** Enjoy a 30-day no-reason return policy.
- Technical Support:** TMY offers lifetime after-sale service and technical support. Expect quick replies within 24 hours.



**Figure 10:** TMY's commitment to customer satisfaction, including lifetime after-sale service, 24-hour support, 30-day return policy, and a 3-year warranty.

For further assistance, please visit the official TMY Store or contact customer support through the details provided on the product packaging or official website.

[Visit the TMY Store on Amazon](#)

© 2025 TMY. All rights reserved.