

## Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [XTU](#) /

› [XTU J9 Wireless Video Doorbell Instruction Manual](#)

## XTU J9

# XTU J9 Wireless Video Doorbell Instruction Manual

Model: J9

## INTRODUCTION

This manual provides detailed instructions for the installation, operation, and maintenance of your XTU J9 Wireless Video Doorbell. The XTU J9 is designed to enhance your home security with its 1080p HD camera, PIR motion detection, two-way audio, and night vision capabilities. Please read this manual thoroughly before using the product to ensure proper function and safety.

## PRODUCT OVERVIEW

### Package Contents

- 1 x XTU J9 Video Doorbell
- 1 x User Guide
- 1 x Micro USB Cable
- 1 x Tool Kit (screws, wall anchors, adhesive tabs)

### Key Features

- **100% Wireless Operation:** Equipped with a built-in rechargeable battery for convenient, wire-free installation.
- **1080p Full HD Video:** Provides clear, high-definition video footage.
- **166° Wide Viewing Angle:** Captures a broad perspective of your doorstep.
- **PIR Motion Detection:** Advanced passive infrared sensor detects human movement and sends real-time alerts.
- **Super Night Vision:** Integrated infrared lights enable clear visibility up to 10 meters (33 feet) in low-light conditions.
- **Two-Way Audio:** Allows direct communication with visitors via the CloudEdge app.
- **IP66 Weatherproof:** Designed to withstand various weather conditions for year-round outdoor use.
- **Flexible Storage Options:** Supports local storage via Micro SD card (up to 128GB, not included) and cloud storage services.
- **Family Sharing:** Allows sharing access with up to 5 authorized users.



Image: The XTU J9 Wireless Video Doorbell shown alongside a smartphone displaying a live feed of a delivery person, illustrating its primary function.

## SETUP GUIDE

---

### Step 1: Charge the Doorbell Camera

Before initial use, fully charge the doorbell using the provided Micro USB cable. Connect the cable to the doorbell's charging port and a standard USB power adapter (not included). A full charge typically takes approximately 8 hours

and can last 1 to 2 months depending on usage.

## Step 2: Download the CloudEdge App

Search for 'CloudEdge' in your smartphone's app store (Google Play Store for Android or Apple App Store for iOS) and download the application. Create an account or log in if you already have one.

## Step 3: Connect to Wi-Fi

1. Open the CloudEdge app and tap 'Add Device' or the '+' icon.
2. Follow the on-screen instructions to select your device type and enter your 2.4 GHz Wi-Fi network details.**Note:** **The doorbell only supports 2.4 GHz Wi-Fi networks; 5 GHz networks are not supported.**
3. The app will generate a QR code. Position your doorbell camera to scan this QR code from your phone screen. You will hear a confirmation sound once connected.

## Step 4: Install the Doorbell

Choose a suitable location near your front door. You can mount the doorbell using the provided screws and wall anchors, or use the adhesive tabs for a less permanent installation. Ensure the camera has a clear view of the area you wish to monitor.



Image: A visual representation of the four-step installation process: charging the doorbell, downloading the CloudEdge app, scanning a QR code for Wi-Fi connection, and physically installing the doorbell.

## OPERATING INSTRUCTIONS

---

### Live View and Two-Way Audio

Open the CloudEdge app to access the live video feed from your doorbell. When a visitor presses the doorbell or motion is detected, you will receive a notification on your smartphone. Tap the notification to view the live feed and use the microphone icon to speak to the visitor. The app also offers pre-recorded voice messages for quick responses and a voice changer feature for privacy.



# Two-Way Audio & Voice Changer

Talk and see who's ringing & Protect your privacy

Put it by the door, thanks

Hello, your package delivery

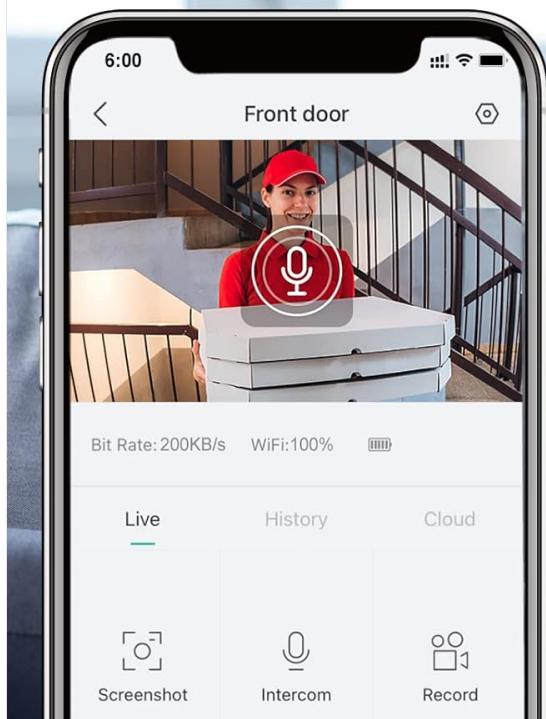


Image: A woman using her smartphone to communicate through the XTU J9 doorbell, with speech bubbles indicating two-way audio and voice changer options.

## Motion Detection and Alerts

The integrated PIR sensor detects movement and sends instant push notifications to your phone. You can adjust the sensitivity of the motion detection and customize specific motion zones within the app to reduce unnecessary alerts, such as from passing traffic.



# PIR Motion Detection & Instant Alarm

Protect your home all the time

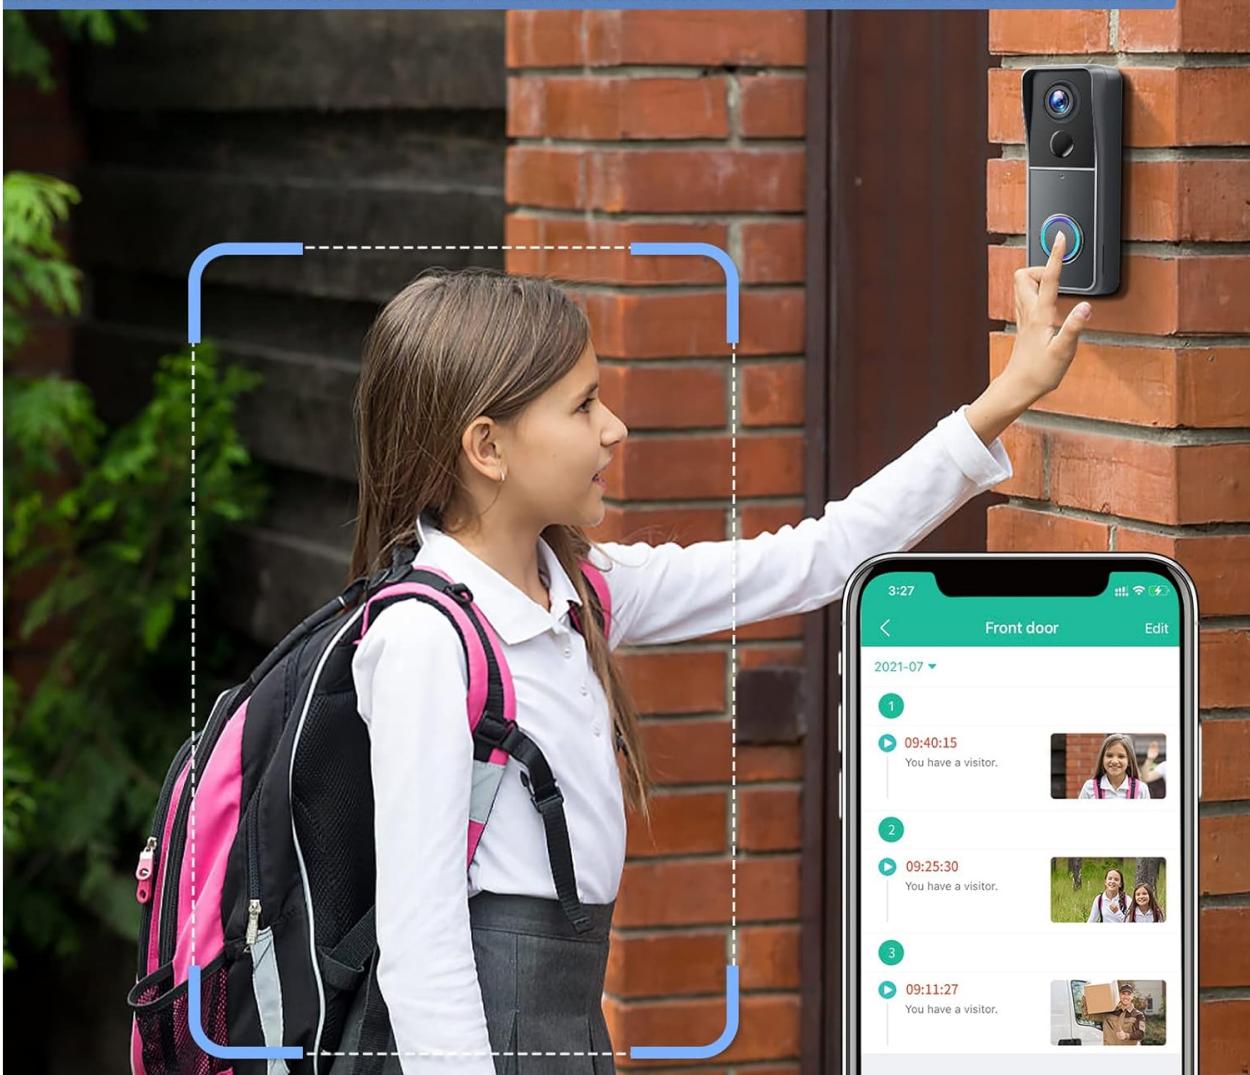


Image: A child pressing the XTU J9 doorbell, with a smartphone displaying motion detection alerts and a timeline of visitor events.

## Night Vision

The doorbell automatically switches to night vision mode in low-light conditions, utilizing its infrared lights to provide clear black-and-white video footage up to 10 meters. This ensures continuous monitoring day and night.



# 2K FHD Video IR Night Vision

Works efficiently day and night



Day



Night Vision

Image: A smartphone display showing a split view of a scene captured by the XTU J9 doorbell, illustrating both clear daytime and infrared night vision capabilities.

## Video Recording and Storage

The XTU J9 doorbell supports two methods for video recording storage:

- **Micro SD Card:** Insert a Micro SD card (up to 128GB, not included) into the designated slot on the doorbell for local storage of recordings.
- **Cloud Storage:** The device offers cloud storage options, typically including a free trial period. Recordings are stored securely in the cloud and can be accessed via the CloudEdge app.



Image: A visual representation of the XTU J9 doorbell's two storage methods: a Micro SD card icon indicating local storage and a cloud icon for cloud-based storage.

## Family Sharing

You can share access to your doorbell's live feed and notifications with family members. The CloudEdge app allows you to add up to 5 users, enabling multiple individuals to monitor your home security.



# Video Sharing

Sharing the moment with your family members



Image: A diagram showing the XTU J9 doorbell at the center, with connections extending to various family members using smartphones, symbolizing the video sharing feature.

## MAINTENANCE

### Battery Management

The XTU J9 doorbell features a built-in rechargeable battery. Monitor the battery level through the CloudEdge app. When the battery is low, recharge it using the Micro USB cable. Regular charging ensures continuous operation.

### Weather Resistance

With an IP66 waterproof rating, the doorbell is designed to withstand dust, rain, and other environmental elements. Ensure it is securely mounted to prevent water ingress during extreme weather conditions.



**IP66 Waterproof**  
Ready for any tough weather



Image: The XTU J9 doorbell mounted on an exterior wall during a thunderstorm, visually representing its IP66 waterproof capability.

## TROUBLESHOOTING

- **Doorbell not connecting to Wi-Fi:** Ensure your Wi-Fi network is 2.4 GHz. Check that the Wi-Fi signal strength is adequate at the doorbell's installation location. Restart your router and the doorbell, then try the connection process again.
- **No motion detection alerts:** Verify that PIR motion detection is enabled in the CloudEdge app settings. Adjust the sensitivity level and ensure motion zones are correctly configured.
- **Short battery life:** Frequent motion detection events, live view access, and cold weather can reduce battery life. Ensure the doorbell is fully charged. Consider reducing motion detection sensitivity or frequency if not critical.
- **Poor video quality:** Check your Wi-Fi connection strength. A weak signal can affect video streaming quality. Ensure the camera lens is clean and free from obstructions.
- **Two-way audio issues:** Ensure your smartphone's microphone and speaker are functioning correctly. Check the volume settings in the app and on your phone.

## SPECIFICATIONS

Model Number	J9
Video Resolution	1080p Full HD
Viewing Angle	166 Degrees
Night Vision Range	Up to 10 meters (33 feet)
Wireless Connectivity	Wi-Fi (2.4 GHz only)
Power Source	Rechargeable Battery (Lithium-polymer)
Water Resistance	IP66
Dimensions (L x W x H)	5.62 x 3.8 x 14.7 cm
Storage Options	Micro SD Card (up to 128GB), Cloud Storage
Compatible Devices	Smartphone (Android, iOS)

## WARRANTY AND SUPPORT

For warranty information or technical support, please refer to the warranty card included in your product package or visit the official XTU website. You may also contact XTU customer service directly for assistance with product setup, operation, or troubleshooting.

## Related Documents - J9

	<a href="#">XTU J5 2K Wired Video Doorbell Quick Start Guide</a> Comprehensive quick start guide for the XTU J5 2K Wired Video Doorbell. Covers unboxing, setup, connecting the chime, installation (retro-fit and hardwire), live view, settings, recording, history playback, and troubleshooting.
	<a href="#">XTU J7 1080P Battery-Powered Video Doorbell Instruction Manual</a> Comprehensive instruction manual for the XTU J7 1080P battery-powered video doorbell, covering setup, features, troubleshooting, and specifications.
	<a href="#">XTU J5 2K Wired Video Doorbell Quick Start Guide</a> A comprehensive quick start guide for the XTU J5 2K Wired Video Doorbell, covering setup, features, installation, and troubleshooting.

 <div data-bbox="119 348 309 415" style="background-color: #0070C0; color: white; padding: 5px; text-align: center;"> <b>USER MANUAL</b>  <small>1080P Battery-Powered Doorbell Camera</small> </div>	<p><b><u><a href="#">XTU J9 1080P Battery-Powered Doorbell Camera User Manual</a></u></b></p> <p>This user manual provides detailed instructions for the XTU J9 1080P Battery-Powered Doorbell Camera, covering setup, installation, pairing with the indoor chime, and troubleshooting.</p>
 <div data-bbox="119 707 309 774" style="background-color: #0070C0; color: white; padding: 5px; text-align: center;"> <b>USER MANUAL</b>  <small>3MP Battery-Powered Doorbell Camera</small>  <small>Official Website: <a href="#">www.xtucam.com</a></small> </div>	<p><b><u><a href="#">XTU J10 3MP Battery-Powered Doorbell Camera User Manual</a></u></b></p> <p>Comprehensive user manual for the XTU J10 3MP Battery-Powered Doorbell Camera. Learn how to set up, install, and use your doorbell and chime, including app instructions and troubleshooting.</p>
 <div data-bbox="119 1111 309 1179" style="background-color: #0070C0; color: white; padding: 5px; text-align: center;"> <b>BELL-J9</b>  <small>SMART VIDEO DOORBELL</small>  <small>WIRELESS WI-FI OUTDOOR WATERPROOF</small>  <small>ICLOUD SUPPORT</small> </div>	<p><b><u><a href="#">MUBVIEW Bell-J9 Smart Video Doorbell Quick Start Guide</a></u></b></p> <p>Comprehensive guide to setting up and using the MUBVIEW Bell-J9 Smart Video Doorbell, including installation, app connection, pairing, and specifications.</p>