**Saved from manuals.plus.**
**Open the live page for links to other documents and user manuals.**



## Tribit StormBox Micro 2

# Tribit StormBox Micro 2 Portable Speaker User Manual

Model: StormBox Micro 2

### Introduction

The Tribit StormBox Micro 2 is a compact and powerful portable Bluetooth speaker designed for exceptional audio quality and durability. Featuring a robust build, extended battery life, and advanced connectivity options, it is ideal for outdoor activities and on-the-go listening. This manual provides essential information for setting up, operating, and maintaining your speaker.




Image: The Tribit StormBox Micro 2 in blue, showcasing its compact design and top-mounted control buttons.

## What's in the Box

Upon unboxing your Tribit StormBox Micro 2, please ensure all the following items are present:

- Tribit StormBox Micro 2 Portable Speaker x1
- USB-C Charging Cable x1
- User Manual x1

## Product Overview

Familiarize yourself with the various components and controls of your StormBox Micro 2 speaker.




Image: Front, side, and rear views of the StormBox Micro 2, illustrating its compact dimensions (3.87"D x 3.87"W x 1.89"H) and the integrated strap on the back.

### Controls and Indicators:

- **Power Button:** Located on the side, used to turn the speaker on or off.
- **Bluetooth Button:** Activates Bluetooth pairing mode.
- **Volume Buttons (+/-):** Adjusts the playback volume.
- **Multi-function Button (Circle):** Controls playback (play/pause), call management, and voice assistant.
- **USB-C Port:** For charging the speaker and reverse charging other devices.
- **Battery Indicator Lights:** Displays the current battery level.
- **Integrated Strap:** A durable strap on the back for attaching the speaker to various objects.

## Setup

### 1. Charging the Speaker

Before first use, fully charge your StormBox Micro 2. Connect the provided USB-C charging cable to the speaker's USB-C port and the other end to a compatible USB power adapter (not included). The battery indicator lights will show charging progress. A full charge takes approximately 4 hours.

### 2. Power On/Off

- To power on, press and hold the Power button until the indicator lights illuminate.
- To power off, press and hold the Power button again until the indicator lights turn off.

### 3. Bluetooth Pairing

The StormBox Micro 2 utilizes Bluetooth 5.3 technology for a stable connection up to 150 feet.

1. Turn on the StormBox Micro 2. The Bluetooth indicator light will flash blue, indicating it's in pairing mode.
2. On your device (smartphone, tablet, etc.), enable Bluetooth and search for "Tribit StormBox Micro 2" in the list of available devices.
3. Select the speaker to connect. Once connected, the Bluetooth indicator light will turn solid blue.




Image: A visual representation of the Bluetooth pairing process between the StormBox Micro 2 and a mobile device.

## Operating Your Speaker

### Basic Playback Controls

- **Play/Pause:** Press the Multi-function button once.
- **Next Track:** Double-press the Multi-function button.
- **Previous Track:** Triple-press the Multi-function button.
- **Volume Up:** Press the '+' button.
- **Volume Down:** Press the '-' button.

## TWS Pairing (Stereo Mode)

You can pair two StormBox Micro 2 speakers together for a more immersive stereo sound experience.

1. Ensure both speakers are powered on and not connected to any other Bluetooth devices.
2. On one speaker, press and hold the Bluetooth button for 3 seconds until you hear a prompt. This speaker will be the primary speaker.
3. On the second speaker, press the Bluetooth button once. It will automatically connect to the primary speaker.
4. Once paired, the primary speaker's Bluetooth indicator will flash blue and white, and the secondary speaker's will be solid blue.
5. Connect your device to the primary speaker via Bluetooth.

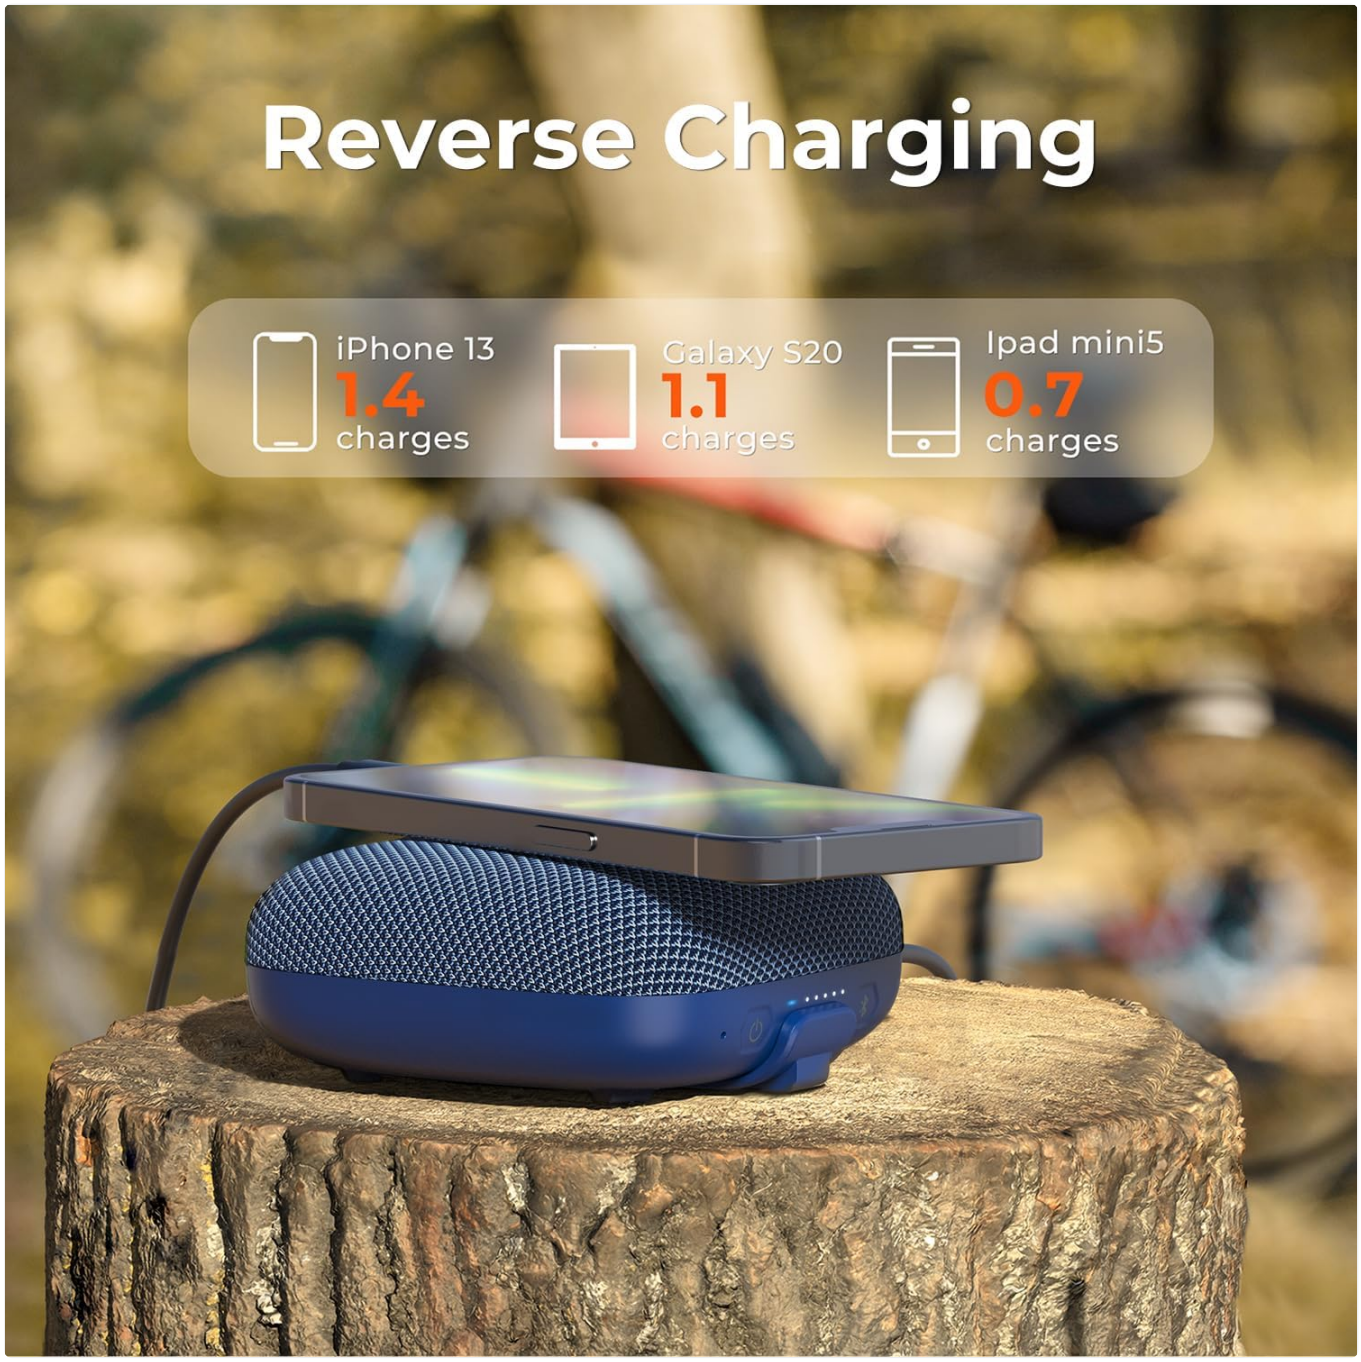


Image: Two StormBox Micro 2 speakers wirelessly connected, demonstrating the TWS Stereo Mode setup.

## Reverse Charging Function

The StormBox Micro 2 can act as a power bank to charge other devices. Simply connect your device to the speaker's USB-C port using a compatible charging cable.




Image: The StormBox Micro 2 providing power to a smartphone, demonstrating its reverse charging capability.

## Tribit App Control

For enhanced control and customization, download the Tribit App from your device's app store. The app allows you to adjust EQ settings, manage TWS pairing, and access additional features.




Image: A smartphone screen showing the Tribit app's equalizer interface, positioned next to the StormBox Micro 2 speaker.

## Maintenance

To ensure the longevity and optimal performance of your Tribit StormBox Micro 2, follow these maintenance guidelines:

- **Cleaning:** Use a soft, damp cloth to wipe the speaker's surface. Avoid using harsh chemicals or abrasive cleaners.
- **Water Resistance:** The speaker is IP67 waterproof, meaning it can withstand immersion in water up to 1 meter for 30 minutes. Ensure the USB-C port cover is securely closed before exposing it to water. After exposure to water, dry the speaker thoroughly before charging.
- **Storage:** Store the speaker in a cool, dry place away from extreme temperatures and direct sunlight.

## Troubleshooting

If you encounter issues with your StormBox Micro 2, refer to the following common problems and solutions:

| Problem | Possible Solution |
| --- | --- |
| Speaker does not turn on. | Ensure the battery is charged. Connect the speaker to a power source and try again. |
| Cannot pair with Bluetooth device. | Make sure the speaker is in pairing mode (flashing blue light).<br>Ensure your device's Bluetooth is enabled and within range (150 ft).<br>Forget "Tribit StormBox Micro 2" from your device's Bluetooth list and try pairing again.<br>Restart both the speaker and your device. |
| No sound or low volume. | Increase the volume on both the speaker and your connected device.<br>Ensure the speaker is properly connected via Bluetooth.<br>Check if the audio source is playing. |
| Sound distortion or crackling. | Move the speaker closer to your device to reduce interference.<br>Avoid placing the speaker near other wireless devices that may cause interference.<br>Lower the volume if it's too high. |

| Problem | Possible Solution |
| --- | --- |
| TWS pairing fails. | Ensure both speakers are fully charged and not connected to any other devices.<br>Follow the TWS pairing steps carefully, ensuring one speaker is set as primary.<br>Try resetting both speakers to factory settings (refer to the Tribit App or product support for instructions). |

## Specifications

| Feature | Detail |
| --- | --- |
| Model Name | StormBox Micro 2 |
| Brand | Tribit |
| Speaker Type | Woofer |
| Special Features | Explosive Outdoor-audio, TWS Pairing, Bluetooth 5.3, Built-in Strap, IP67 Waterproof, Reverse Charging |
| Connectivity Technology | Bluetooth, USB |
| Wireless Communication Technology | Bluetooth |
| Bluetooth Range | 150 ft (45.7 meters) |
| Battery Life | 12 Hours |
| Battery Capacity | 4700 Milliamp Hours |
| Charging Time | 4 Hours |
| Water Resistance Level | Waterproof (IP67) |
| Item Weight | 9.6 ounces |
| Product Dimensions | 3.87"D x 3.87"W x 1.89"H |
| Speaker Maximum Output Power | 10 Watts |
| Audio Driver Size | 48 Millimeters |
| Control Method | App |

## Warranty and Support

The Tribit StormBox Micro 2 comes with a**Limited Warranty**. For detailed warranty information, product support, or to contact customer service, please visit the official Tribit website or refer to the contact information provided with your purchase documentation.
You can also visit the Tribit store on Amazon for more information:Tribit Amazon Store

© 2025 Tribit. All rights reserved.

## Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

**Name**

Anonymous

**Email**

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

**Question**

Example: How do I reset this device or fix this error?

**Details**

Model number, symptoms, what you tried, or the section of the manual you are using.

**Submit question**

---

**Open the live page**

**https://manuals.plus/asin/B0BGPCSM6Y**

More documents and user manuals: **https://manuals.plus/**