

Saved from manuals.plus.

Open the live page for links to other documents and user manuals.

[Manuals.plus](#) /

› [Lefant](#) /

› Lefant M213S Robot Vacuum Cleaner Instruction Manual

Lefant M213S

Lefant M213S Robot Vacuum Cleaner Instruction Manual

Model: M213S

1. INTRODUCTION

Thank you for purchasing the Lefant M213S Robot Vacuum Cleaner. This manual provides essential information for the safe and efficient operation and maintenance of your device. Please read it thoroughly before use and keep it for future reference.



Image: The Lefant M213S Robot Vacuum Cleaner, a compact and efficient cleaning device.

2. PACKAGE CONTENTS

Ensure all items are present in the package:

- Lefant M213S Robot Vacuum Cleaner
- Charging Station
- AC Adapter
- 500ml Dustbin
- Side Brushes
- HEPA Dust Cut Filter
- Waterproof Pad
- Mop Pad
- Disposable Cloths
- Instruction Manual

パッケージ内容



M213S



充電
ステーション



防水パッド



モップ



使い捨てクロス



HEPA ダストカットフィルター



500mlゴミ箱



サイドブラシ



ACアダプタ

Image: All components included in the Lefant M213S Robot Vacuum Cleaner package, neatly laid out.

3. SETUP

3.1 Charging Station Placement

Place the charging station against a wall in an open area, ensuring there are no obstacles within 0.5m to the left and right, and 1.5m in front. This allows the robot to return for charging easily.

3.2 Initial Charging

Before first use, fully charge the robot vacuum. Connect the AC adapter to the charging station and plug it into a power outlet. Place the robot on the charging station. The indicator light will show charging status.

3.3 App Connection (Lefant APP)

To unlock full smart features, connect your Lefant M213S to the Lefant APP:

1. Download the "Lefant" app from your device's App Store (iOS) or Play Store (Android).
2. Open the app and follow the on-screen instructions to add your robot.
3. Ensure your phone is connected to a 2.4GHz WiFi network (5GHz is not supported).
4. Follow the app's guidance to connect the robot to your home WiFi network.

Your browser does not support the video tag.

Video: Demonstrates how to connect the Lefant robot vacuum to the Lefant mobile application for smart control and scheduling.

3.4 Mopping Module Attachment

For mopping functionality, attach the mop module:

1. Attach the mop pad to the water tank.
2. Open the rubber stopper on the water tank and fill it with water. Close the stopper securely.
3. Align the water tank with the holes on the robot vacuum and attach it firmly.
4. Once mopping is complete, remove the water tank, empty any remaining water, and clean the mop pad.

Your browser does not support the video tag.

Video: Instructions on how to attach and detach the water tank and mop pad for the Lefant M330 Pro, applicable to similar models like M213S.

4. OPERATING MODES

The Lefant M213S offers multiple cleaning modes and adjustable suction power to suit various cleaning needs.

4.1 Suction Power

Equipped with a brushless motor, the M213S provides powerful suction up to 3200Pa. It features three adjustable suction modes: Silent, Standard, and Powerful. The robot can automatically switch to Powerful mode when detecting carpets.

ブラシレス吸引口設計、より強力な吸引力

ペットのいるご家庭に最適で、髪の毛絡みつき問題を解決し、二次清掃の手間を省けます。

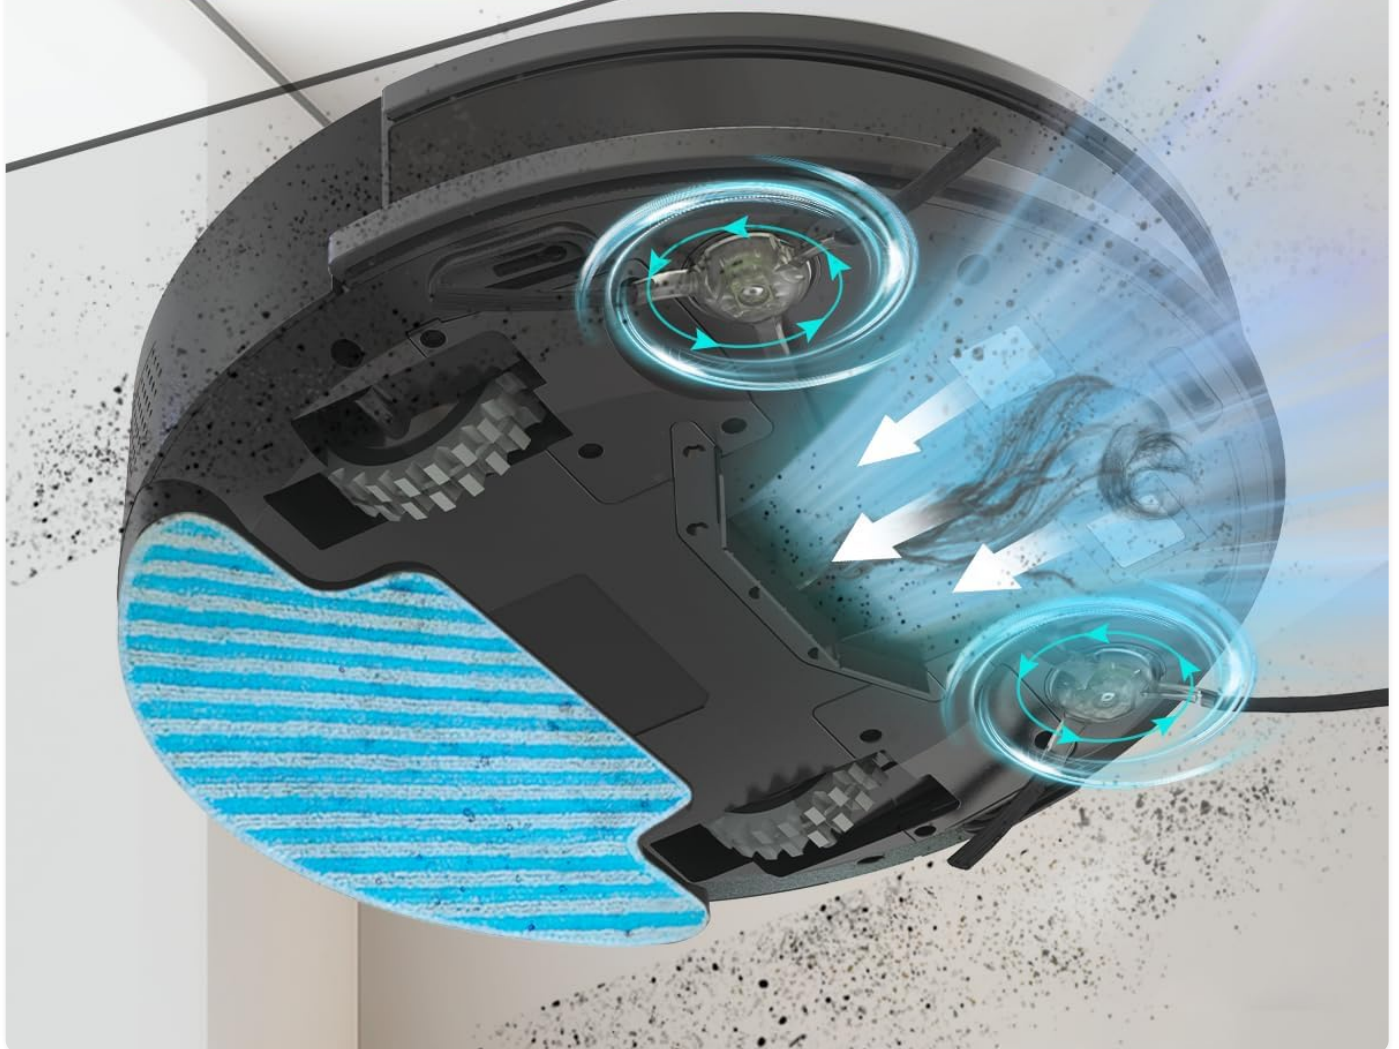


Image: The brushless suction port of the Lefant M213S, designed to prevent hair tangles and provide strong suction.

4.2 Cleaning Modes

Choose from 6 cleaning modes via the Lefant APP or remote control (sold separately):

- **Bow-shaped Cleaning:** Systematic cleaning pattern.
- **Random Cleaning:** Covers the area randomly.
- **Spot Cleaning:** Concentrates on a specific dirty area.

- **Edge Cleaning:** Cleans along walls and furniture edges.
- **Scheduled Cleaning:** Set a cleaning schedule.
- **Manual Operation:** Control the robot manually.

3つの効果的なクリーニングモード

1. 最初のステップは定期的な往復クリーニングです。(●)
2. 第2のステップは、最初のステップで見落とされたエリアをクリーニングします。(●)
3. 第3のステップは、壁際をクリーニングします。(●)

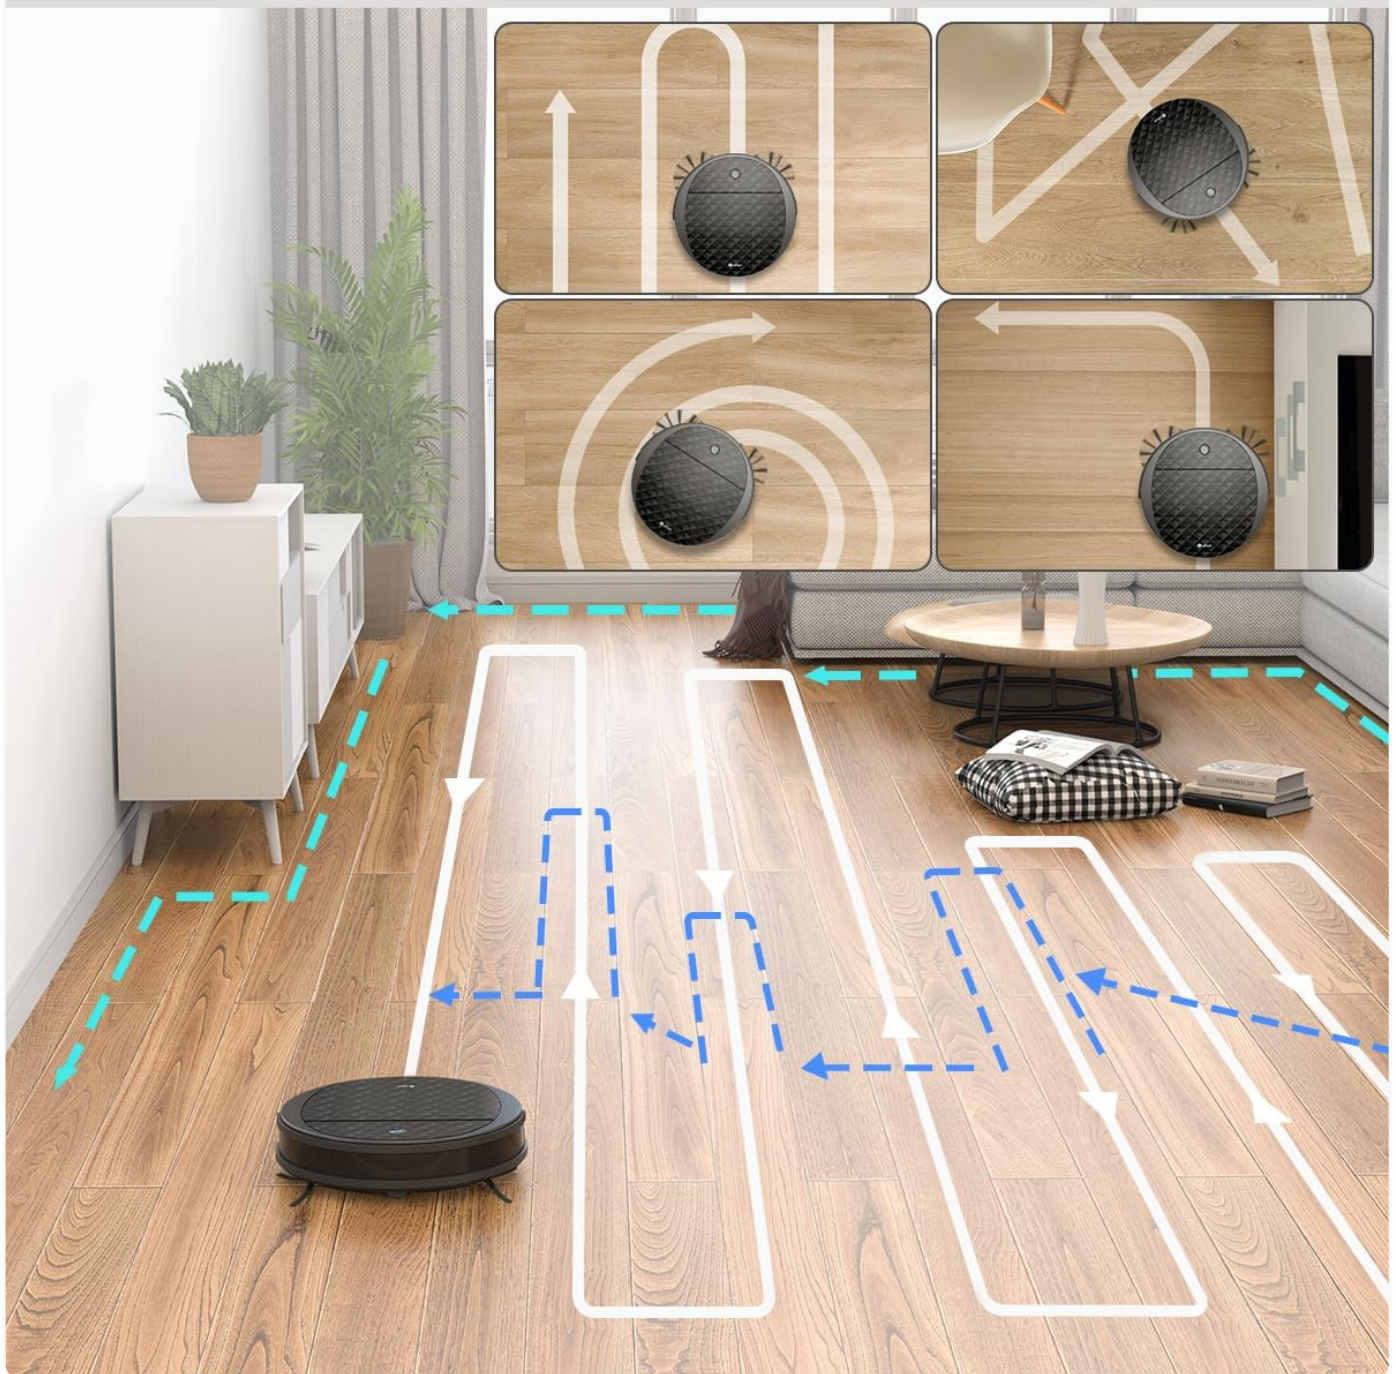


Image: Visual representation of the various cleaning modes, including systematic and edge cleaning patterns.

4.3 Suction and Mopping

The M213S is a hybrid robot vacuum that performs both powerful suction and mopping simultaneously. It effectively removes dust and debris while wiping away dirt and grime from your floors. Note: This model does not include a built-in water tank; mopping is done via an attachable module with disposable sheets.



Image: The Lefant M213S performing both vacuuming and mopping functions on a hard floor, highlighting its dual cleaning capabilities.

5. KEY FEATURES

5.1 Slim and Compact Design

With a diameter of only 28cm and a height of 7.8cm, the M213S can easily navigate under furniture like beds and sofas, reaching dust and pet hair in hard-to-reach areas. The brushless suction port significantly reduces hair tangling issues.

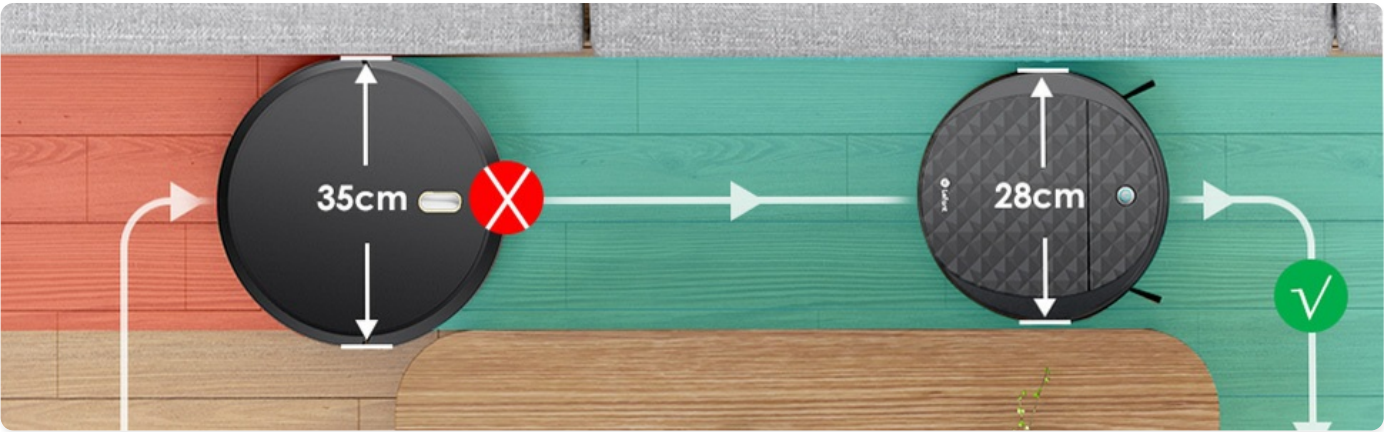


Image: The slim profile of the Lefant M213S allows it to clean effectively under low-lying furniture.

Your browser does not support the video tag.

Video: Highlights the slim design of the Lefant M210 Pro+ (similar to M213S) and its ability to clean under furniture without tangling pet hair.

5.2 FreeMove Technology 2.0

The M213S incorporates enhanced anti-collision infrared sensors, providing 360-degree effective detection of its surroundings. This ensures precise cleaning paths and avoids obstacles, preventing collisions and falls.

5.3 Automatic Charging and Fall Prevention

The robot automatically returns to its charging station when cleaning is complete or the battery is low. It is equipped with fall prevention sensors to avoid drops from stairs or ledges. It can also climb over obstacles up to 1.5cm high.

5.4 Large Dustbin and Low Noise Operation

The M213S features a large 500ml dustbin, reducing the frequency of emptying. Its operation noise is kept to 55dB in Silent mode, ensuring a quiet cleaning experience that won't disturb your sleep.

リン酸鉄リチウム電池

安全性と低減衰で長寿命であることが知られています、よく自動車にも利用されます。



150分間



高い安全性



耐久性



55dB

静音モード

60dB

標準モード

67dB

強力モード

Image: Illustrates the battery life and various noise levels (55dB Silent, 60dB Standard, 67dB Powerful) of the Lefant M213S.

5.5 Smart Control

Control your M213S with ease using the Lefant APP, remote control (sold separately), or voice commands via Alexa or Google Assistant. The app also provides AI functionality to answer questions about your robot vacuum.

Lefant APPに接続する、 たった4つのステップで。

アレクサ、M213Sをつける。

ok.

-  2.4GHz only
-  Lefant アプリ
-  Amazon Alexa
-  リモコン
-  手動ボタン

Image: Shows a user interacting with the Lefant APP and voice assistants like Alexa for controlling the M213S robot vacuum.

6. MAINTENANCE

6.1 Emptying the Dustbin

The 500ml dustbin is designed for easy, one-touch disposal. Regularly empty the dustbin to maintain optimal suction

performance.

6.2 Cleaning the Mop Pad

After each mopping session, remove the mop pad from the water tank and wash it thoroughly. Allow both the water tank and mop pad to dry completely before storing them for future use.

6.3 General Cleaning Tips

- If the robot is not picking up debris effectively, try increasing the suction power using Spot mode or clean the dustbin and filter.
- Ensure the power switch on the robot's body is ON if it fails to charge.
- Avoid using the robot on thick carpets. It is suitable for thin carpets, tiles, laminate, and hardwood floors.
- Remove cables from the cleaning area to prevent tangling.

7. TROUBLESHOOTING

- **Robot Alarm:** If the robot emits an alarm, refer to the instruction manual for specific error codes and solutions.
- **No Suction:** Check if the dustbin is full or if the filter is clogged. Clean the dustbin and filter as needed.
- **Charging Issues:** Verify that the power switch on the robot's body is turned ON. Ensure the charging station is properly connected and free of obstacles.
- **Navigation Issues:** The robot uses obstacle avoidance sensors. While it cleans effectively, it does not support mapping for specific cleaning areas or no-go zones.

8. SPECIFICATIONS

Feature	Specification
Brand	Lefant
Model Name	M213S
Package Dimensions	38.4 x 33.2 x 11.8 cm
Material	ABS
Color	Black
Special Features	6 Cleaning Modes, 3-stage Suction Adjustment (Max 3200Pa), 150 min Continuous Operation, Auto Charging, Brushless Suction Port, Scheduling, Pet Hair Collection, Anti-Collision, Fall Prevention, Obstacle Climbing, Smart Control (APP, Google/Alexa Voice Control), Slim Body & Quiet Design, Suction & Mopping (Mop Stand Included)
Power Source	Battery Powered
Voltage	19.6 Volts
Noise Level	60 Decibels (Note: Silent mode is 55dB)
Lithium Battery Pack	Battery built-in

Package Weight	3.23 Kilograms
Capacity	500 Milliliters (Dustbin)
Recommended Use	Carpet, Hard Floors

9. WARRANTY AND SUPPORT

Lefant offers a comprehensive warranty for your peace of mind:

- **Product Warranty:** 18 months.
- **Extended Warranty:** An additional 6 months for members, totaling 24 months. Follow @lefant_japan on Instagram to become a member and automatically extend your warranty.
- **Customer Support:** For any product issues, please contact our Japanese customer support.
- All Lefant robot vacuum cleaners comply with Japan's Electrical Appliance and Material Safety Act (PSE) safety certification.



Image: Lefant robot vacuum, representing reliable performance and customer support.

© 2023 Lefant. All rights reserved.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

<https://manuals.plus/asin/B0BHQB5QQT>

More documents and user manuals: <https://manuals.plus/>