

[Manuals.plus](#) /

› [Delupet](#) /

› Delupet DT-68 Dog Shock Collar with Remote User Manual

Delupet DT-68

Delupet Dog Training Collar with Remote

MODEL: DT-68

Introduction

The Delupet DT-68 Dog Training Collar is designed to assist in effective dog training through various corrective stimuli. This manual provides comprehensive instructions for setup, operation, maintenance, and troubleshooting to ensure safe and optimal use of the device.




Figure 1: DeluPet DT-68 Dog Training Collar Remote and Receiver. The remote features a clear display and intuitive buttons for various training modes, while the collar receiver is compact and designed for comfort.

Key Features

- **4 Training Modes:** Beep, Vibration (1-9 levels), Shock (0-99 levels), and Shock Boost (10% higher).
- **Extended Remote Range:** Up to 2600 feet (approximately 800 meters) for effective outdoor training.
- **Adjustable Collar:** Fits dogs over 15 lbs with neck sizes 8-25 inches.
- **IPX7 Waterproof Receiver:** Allows dogs to play in rain or swim with the collar on.
- **4 Channel Support:** One remote can control up to 4 receiver collars simultaneously.
- **Security Keypad Lock:** Prevents accidental activation of commands.

4 TRAINING MODES

Professional Dog Training Collars
Are Customized For Your Dog'S Training Needs

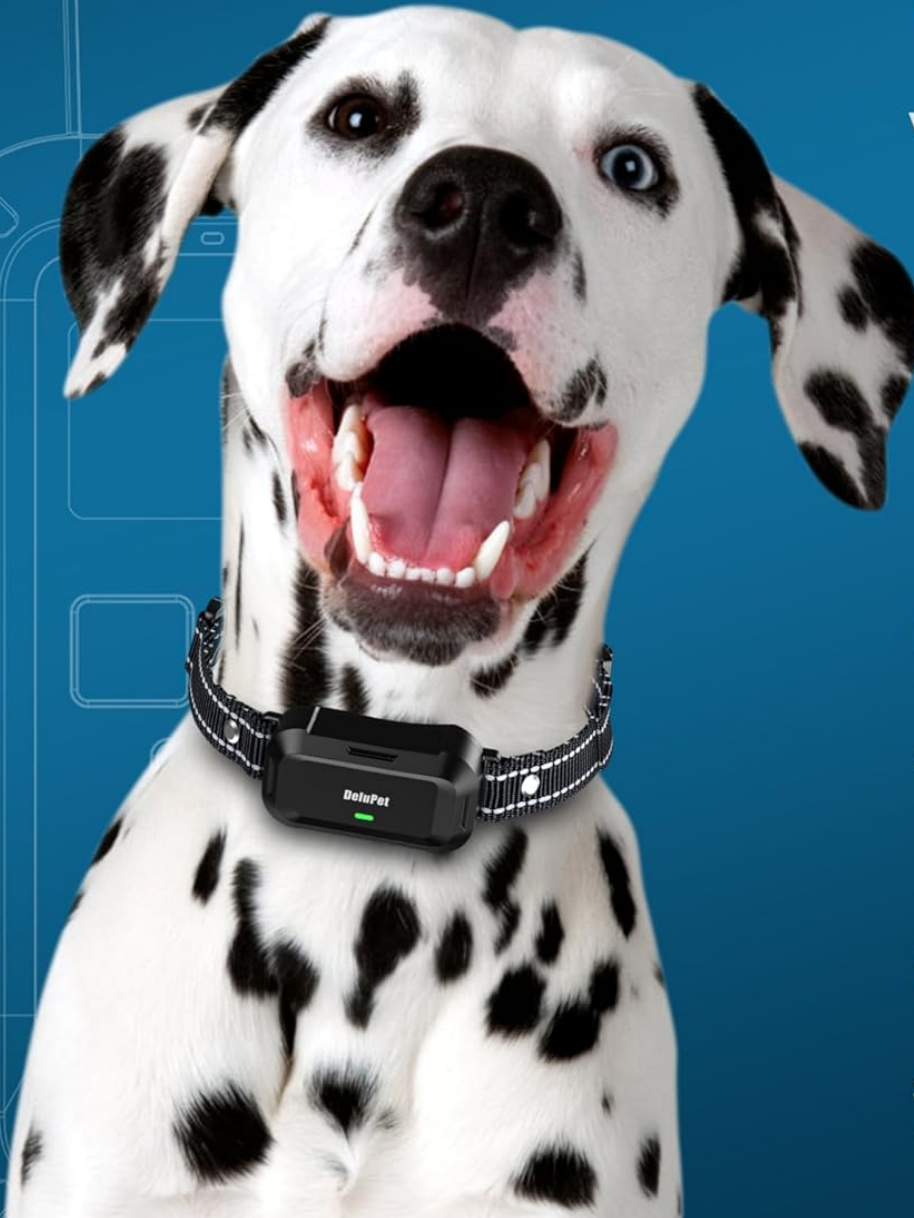

Vibrate Mode
(1-9level)



Beep Mode



Shock Mode
(0-99 level)



Shock Boost
(10% higher)

Figure 2: Illustration of the four training modes: Vibrate, Beep, Shock, and Shock Boost. These modes offer varied levels of stimulation for different training needs.

REMOTE RANGE DISTANCE **2600FT**

Easy for you to train your dog indoors and outdoors



Figure 3: The remote control offers an impressive 2600ft range, allowing for effective training even when your dog is at a distance.

IPX7

WATERPROOF RECEIVER

Dogs can play freely in the water



Splash



Rainy day



Bathing



Swimming

Figure 4: The collar receiver is IPX7 waterproof, ensuring durability and functionality even when exposed to water during play or swimming.

SECURITY KEYPAD LOCK

Less Accidental Shock



Figure 5: The remote features a security keypad lock to prevent accidental activation of commands, ensuring safe handling.

ADJUSTABLE COLLAR FOR DOGS FORM **15-100 LB**

27.5 inch (The extra part of the collar can be cut off)



Figure 6: The adjustable collar is suitable for a wide range of dog sizes, from 15 lbs up, with neck sizes between 8 and 25 inches.

LONG-LASTING BATTERY LIFE

2-3 HOURS FULL CHARGED

Easy charging by your USB Power Strip/Computer
/Power Bank/Power Adapter



2-IN-1 CHARGING CABLE

Figure 7: The included 2-in-1 charging cable allows for convenient charging of both the remote and the collar receiver simultaneously.

Video 1: Official product overview demonstrating the Delupet DT-68 Dog Training Collar's features and basic operation.

Included Components

- 1 x Dog Training Collar Receiver
- 1 x Remote Transmitter
- 1 x 2-in-1 Charging Cable

- 1 x Instruction Manual (this document)
- Contact Points (short and long for different coat lengths)
- Silicone Protective Covers for Contact Points
- Test Light Tool

Setup

1. Charging the Devices

Before first use, fully charge both the collar receiver and the remote transmitter. Connect the 2-in-1 charging cable to a USB power source. The indicator lights will show charging status (e.g., red for charging, green for fully charged).

2. Fitting the Collar

Ensure the collar fits snugly but comfortably around your dog's neck. You should be able to fit two fingers between the collar and your dog's neck. The contact points on the receiver should make direct contact with your dog's skin. Use the appropriate length contact points (short for thin hair, long for thick coats) and consider using the silicone protective covers for added comfort.

3. Pairing the Remote and Receiver

Typically, the remote and receiver come pre-paired. If re-pairing is needed, refer to the detailed instructions in the included paper manual. Ensure both devices are powered on during the pairing process.

Operating Instructions

1. Powering On/Off

To power on the receiver, press and hold the power button until the indicator light illuminates. To power off, press and hold the button until the light turns off. For the remote, slide the side switch to the 'ON' position to power on, and 'OFF' to power off.

2. Selecting Training Modes

The remote offers four training modes: Beep, Vibration, Shock, and Shock Boost. Use the dedicated buttons on the remote's front panel to activate the desired mode.

- **Beep Mode:** Provides an audible tone.
- **Vibration Mode:** Delivers a gentle vibration.
- **Shock Mode:** Delivers a static correction.
- **Shock Boost:** Delivers a 10% higher static correction than the set Shock level.

3. Adjusting Intensity Levels

The Vibration mode has 9 adjustable levels, and the Shock mode has 99 adjustable levels. Use the '+' and '-' buttons on the side of the remote to increase or decrease the intensity for Vibration and Shock modes respectively. Start with the lowest effective level and gradually increase if necessary.

4. Channel Switching

The remote supports up to 4 collars. Use the channel button on the side of the remote to switch between different collar channels if you are training multiple dogs.

5. Keypad Lock

To prevent accidental button presses, slide the lock switch on the side of the remote to the locked position. This will

disable the command buttons until unlocked.

Maintenance

1. Cleaning

Regularly clean the collar receiver and contact points with a damp cloth. Ensure the contact points are free of dirt or debris to maintain effective stimulation. Do not use harsh chemicals.

2. Battery Care

Recharge the devices when the battery indicator shows low power. Avoid fully depleting the battery frequently to prolong its lifespan. Store the devices in a dry place when not in use.

3. Waterproofing

While the receiver is IPX7 waterproof, ensure the charging port cover is securely closed before exposing it to water to prevent internal damage.

Troubleshooting

- **Device not turning on:** Ensure devices are fully charged.
- **No stimulation:** Check collar fit, ensure contact points touch skin, verify battery levels, and confirm remote is on the correct channel. Use the test light tool to confirm shock functionality.
- **Remote not responding:** Check remote battery, ensure it's powered on, and not in locked mode.
- **Inconsistent performance:** Re-pair the remote and receiver. Ensure no strong electromagnetic interference in the training area.

Specifications

Brand Name	Delupet
Model Name	DT-68
Item Weight	10.2 ounces
Item Dimensions (LxWxH)	6.15 x 6.2 x 1.8 inches
Material	ABS+PC
Color	Black
Batteries	2 Lithium Polymer batteries (included)
Waterproof Rating	IPX7
Remote Range	2600 feet
Target Audience	Dogs (Medium to Large, 15-100 lbs)
Care Instructions	Keep in a Dry Place

Warranty and Support

For detailed warranty information and customer support, please refer to the official User Manual (PDF) provided with

your product or visit the Delupet Store on Amazon. Multi-channel service including email, phone, and live chat support may be available as detailed in the user manual.

User Manual (PDF): [Download Here](#)