Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

Govee H1075

Govee 16.4ft Extension Light Instruction Manual

Model: H1075

For use with Govee RGBIC Permanent Outdoor Lights (H705A, H705B, H705C)

Product Overview

This manual provides essential information for the safe and effective installation, operation, and maintenance of your Govee 16.4ft Extension Light. This extension light is designed to expand your existing Govee RGBIC Permanent Outdoor Lights system (models H705A, H705B, H705C). It is not compatible with Gen 2 H705E, H705D, H705F, or Permanent Lights Pro (H706A, H706B, H706C).



Image: Govee 16.4ft Extension Light showing the coiled light strip, VHB glue pads, and mounting clips.

Important Safety Information

- Ensure the power supply is disconnected before installation or maintenance.
- This product is designed for outdoor use and has an IP67 waterproof rating for the lights and an IP65 rating for the control box and adapter (not included with this extension).
- Operating temperature range: -4°F to 140°F (-20°C to 60°C).
- Do not cut the light strip. Cutting will damage the product and void the warranty.
- It is recommended that the total length of your Govee Permanent Outdoor Lights system, including extensions, does not exceed 150ft (45m).

Your browser does not support the video tag.

Video: Govee Permanent Outdoor Lights Waterproof Test. This video demonstrates the IP67 waterproof rating of the lights, showing them functioning under direct water spray and submerged conditions, highlighting their durability in various weather conditions.

What's Included

Your Govee 16.4ft Extension Light package includes the following items:

- 16.4ft (5m) Extension Light Strip
- Mounting Clips
- VHB Glue Pads

Note: The adapter and control box are not included with this extension light and are part of the main Govee Permanent Outdoor Lights kit.

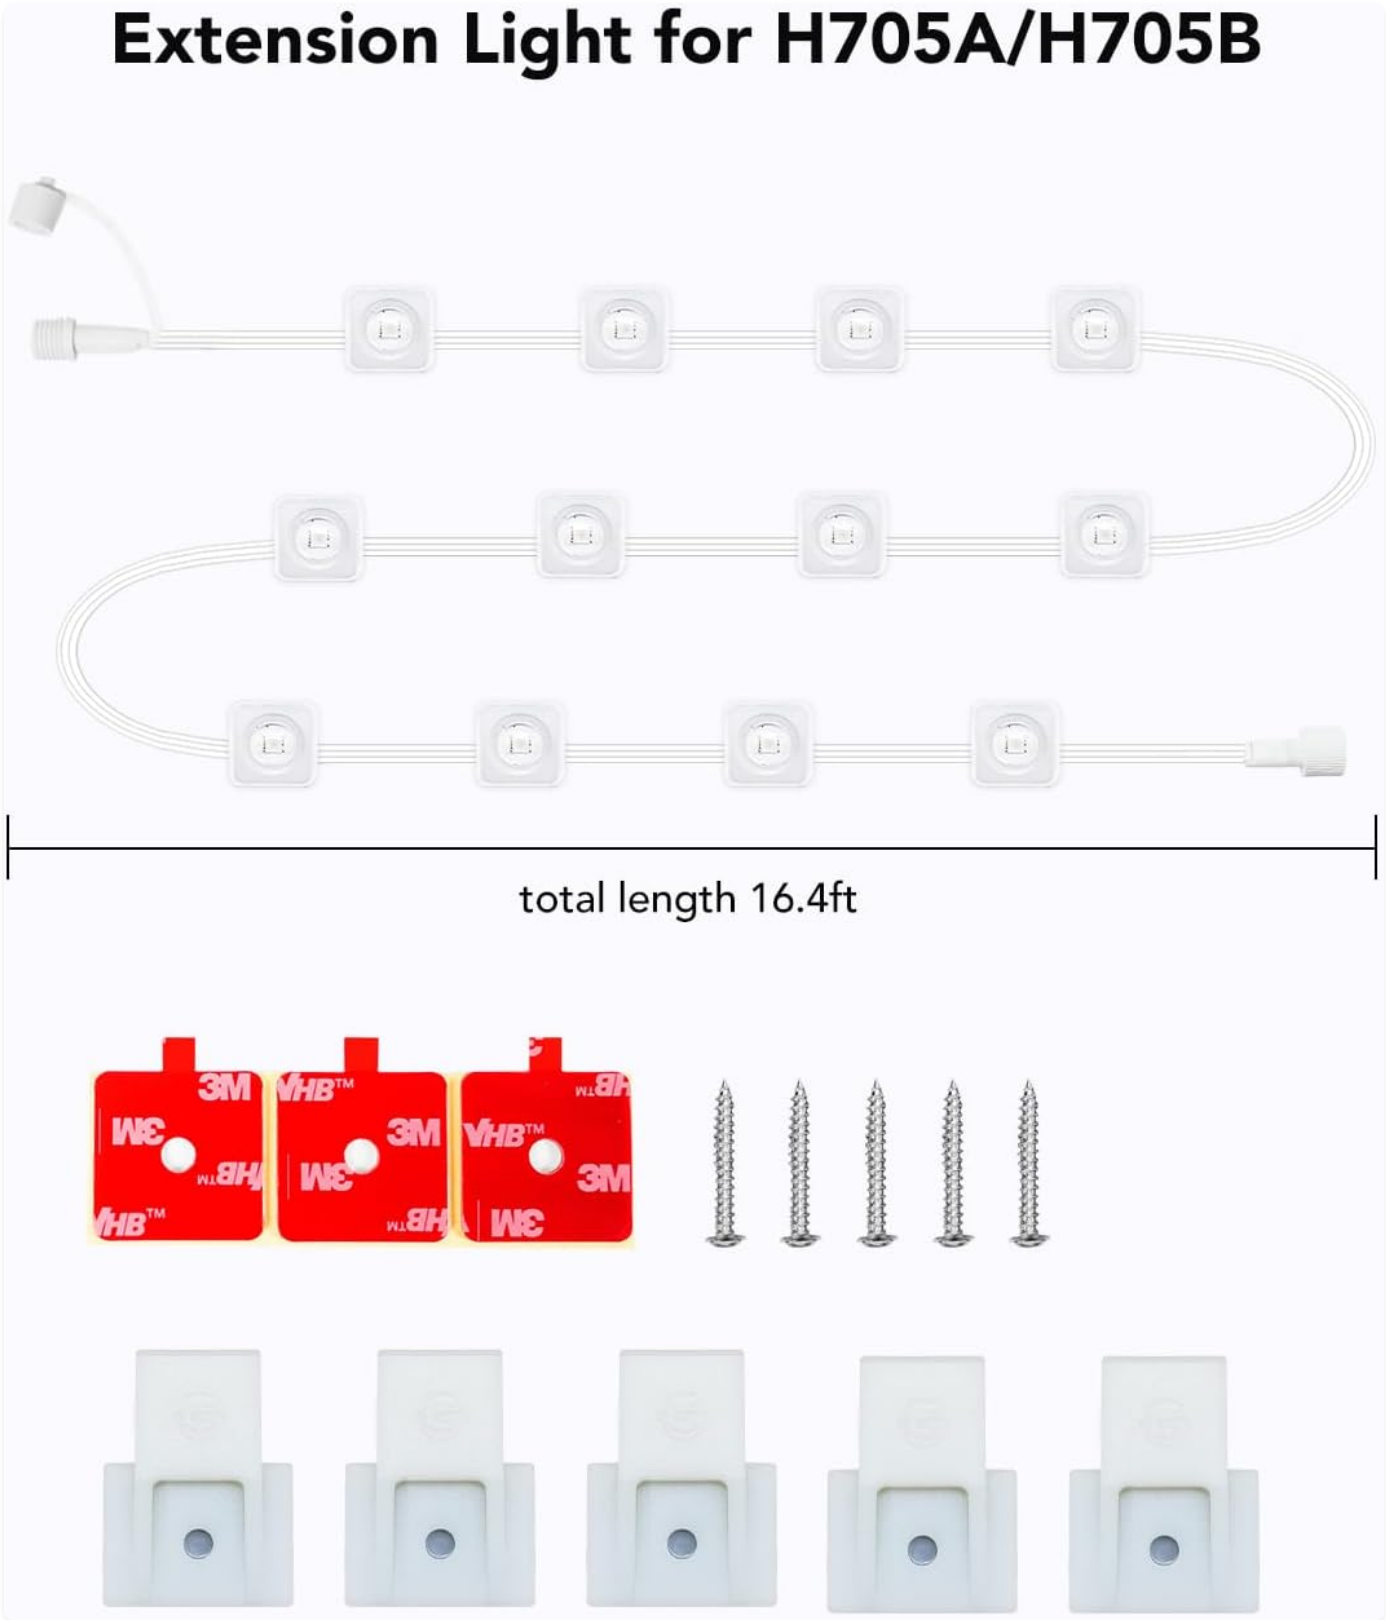


Image: Detailed view of the Govee 16.4ft Extension Light components, showing the light strip, individual VHB glue pads, and plastic mounting clips with screws.

Installation Guide

Follow these steps to properly install your Govee 16.4ft Extension Light:

1. **Choose an Applicable Surface:** Select a smooth, clean, and dry surface for installation. Stucco walls or textured walls are not recommended for direct adhesive application.

2. **Prepare the Surface:** Before installation, thoroughly wipe the surface with a clean cloth or tissue to ensure it is dry and free of dust, dirt, or grease.
3. **Apply VHB Glue:** Tear off the protective film from the VHB glue pad on the back of each light module.
4. **Position and Press:** Carefully position the light strip and press each light module firmly against the surface for more than 5 seconds to ensure strong adhesion.
5. **Secure with Clips:** For added security and long-term stability, attach 4 screw clips to each string light section. This helps to keep them securely in place, especially in outdoor conditions.
6. **Connect Extension:** Connect the extension light strip to your existing Govee Permanent Outdoor Lights system via the waterproof connectors. Ensure the connection is secure.
7. **Secure Connector Cap:** Firmly screw the waterproof connector cap of the last string light section to protect the connection from moisture.

Note: It is advised to install the lights during warm weather or to use the adhesive at the appropriate ambient temperature (around 32°F / 0°C minimum) before applying it to prevent adhesive failure.



Image: A diagram illustrating the Govee 16.4ft Extension Light, highlighting the individual light modules, the total length, and the included VHB glue pads and mounting screws/clips.



Image: A visual step-by-step guide showing how to install the Govee Permanent Outdoor Lights, including surface cleaning, VHB glue application, pressing the light, attaching screw clips, and connecting light sections.

Your browser does not support the video tag.

Video: How to use the VHB glue during installation. This video provides a detailed demonstration of the proper technique for applying the VHB glue and securing the lights during installation.

Operation Guide

Once installed, your Govee Permanent Outdoor Lights system, including this extension, can be controlled via the Govee Home App using Bluetooth or Wi-Fi connectivity. The app allows for extensive customization of lighting effects, colors, and schedules.

- **Color Changing:** Access millions of colors and dynamic lighting effects through the Govee Home App.
- **Dimmable:** Adjust the brightness to suit any occasion or mood.
- **Voice Control:** Integrate with smart home assistants for convenient voice commands (e.g., Alexa, Google Assistant).
- **Scene Modes:** Choose from a variety of preset scene modes for holidays, seasons, or custom ambiance.

Your browser does not support the video tag.

Video: Govee outdoor lights for Christmas decorations. This video showcases various festive lighting effects suitable for Christmas, demonstrating the dynamic capabilities of the Govee Permanent Outdoor Lights system.

Your browser does not support the video tag.

Video: Govee Permanent Outdoor Lights For Every Occasion. This video illustrates the versatility of the lights, displaying different lighting themes for various occasions and holidays throughout the year.

Maintenance

The Govee 16.4ft Extension Light is designed for minimal maintenance due to its durable construction and weather resistance.

- **Cleaning:** Periodically wipe the light modules and cables with a soft, damp cloth to remove any accumulated dirt or debris. Ensure the power is off before cleaning.
- **Durability:** The lights are built with anti-UV material for long-term outdoor use and have an average life of up to 50,000 hours.
- **Weather Resistance:** The lights are IP67 waterproof, and the main control box (from your primary kit) is IP65 rated, allowing for year-round use in various weather conditions.

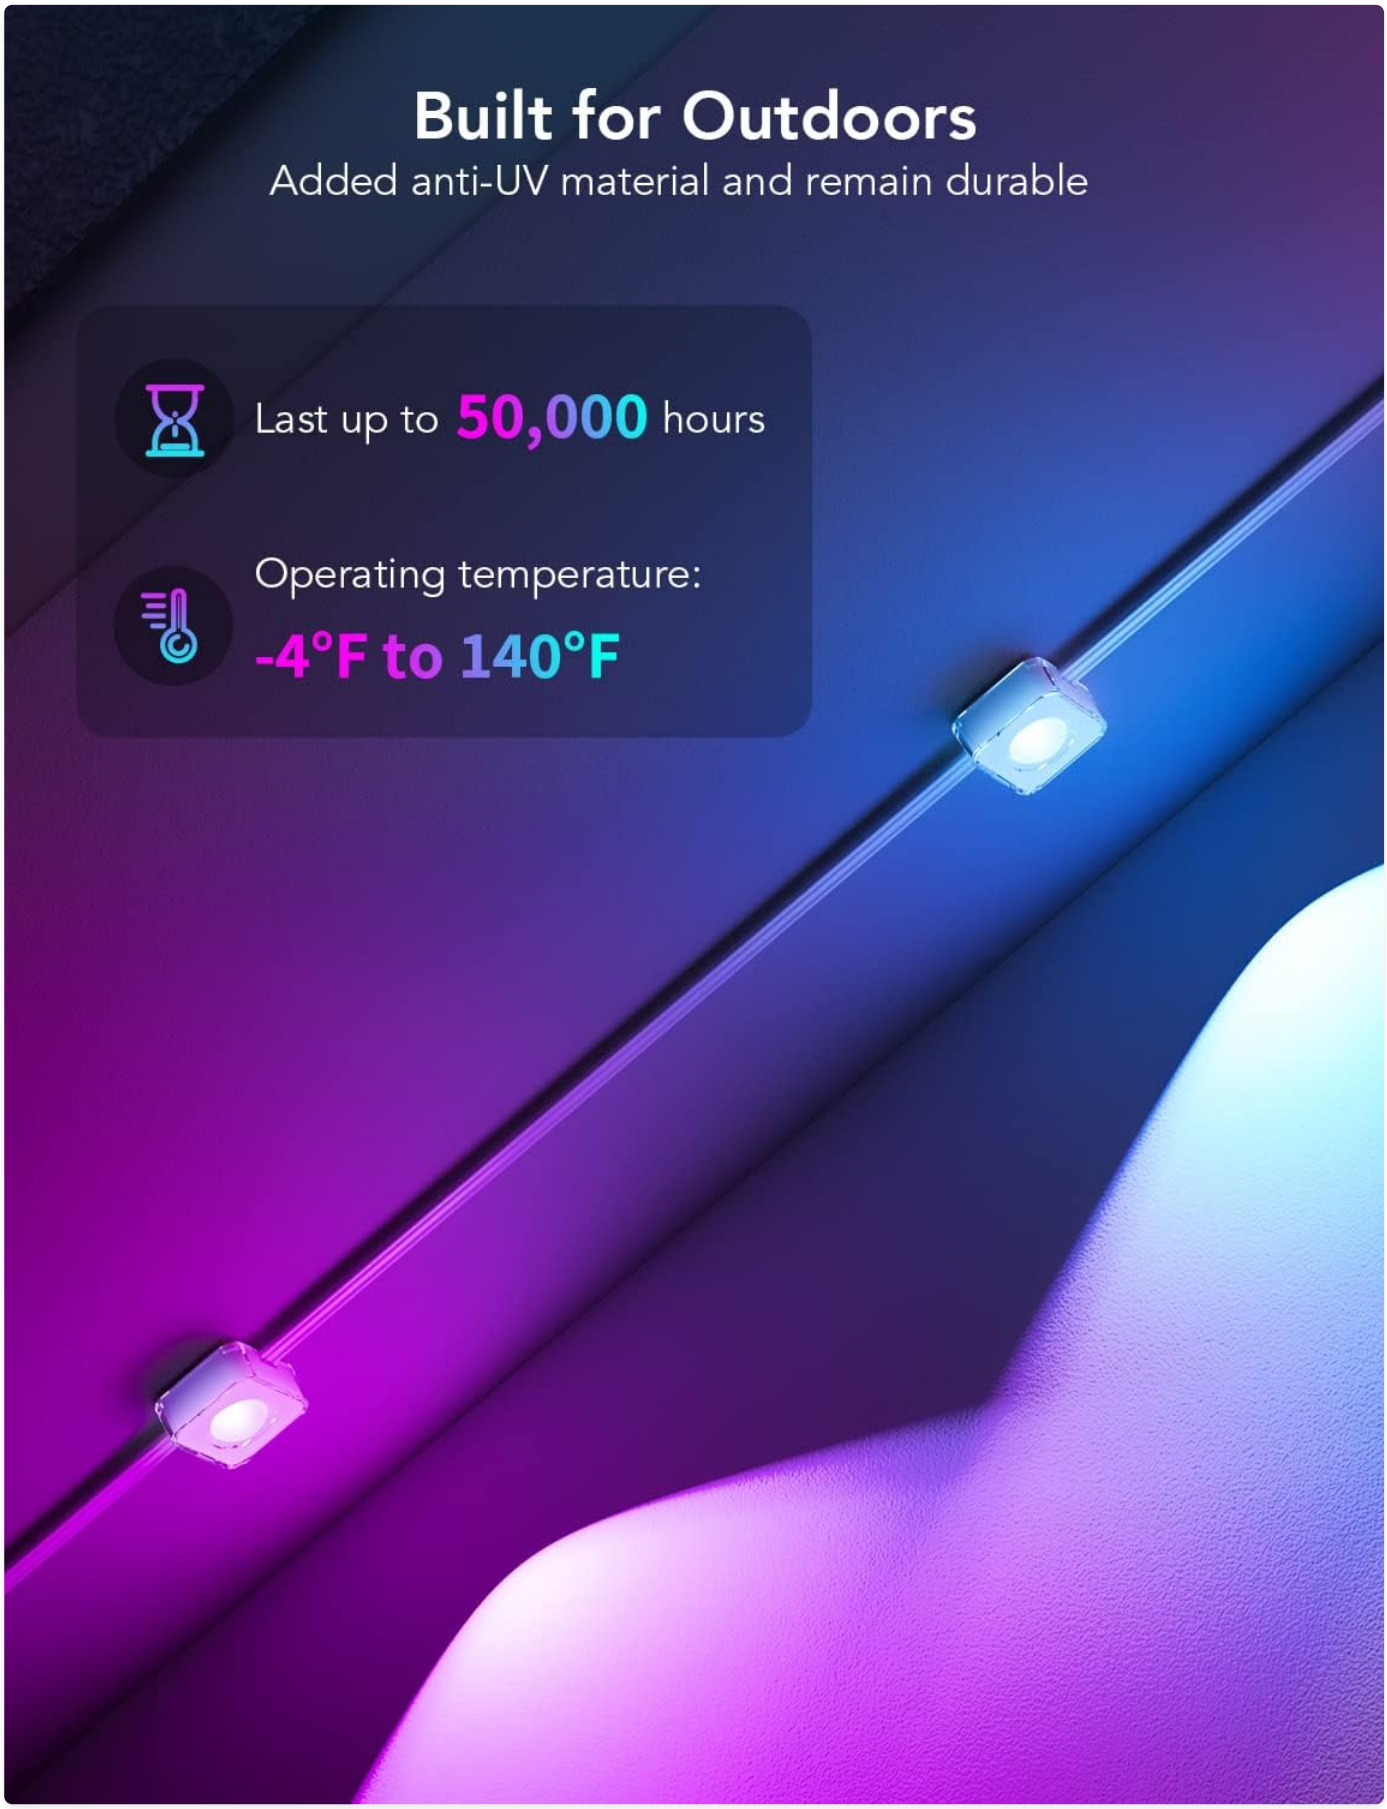


Image: An illustration highlighting the "Built for Outdoors" features of the Govee Permanent Outdoor Lights, including a lifespan of up to 50,000 hours and an operating temperature range of -4°F to 140°F.

Troubleshooting

Extension Light Not Functioning After Connection

If your newly added extension light strip does not light up after connecting it to your existing system, follow these steps:

1. **Power Cycle:** Turn off the power to your entire Govee Permanent Outdoor Lights system.
2. **Ensure Secure Connection:** Double-check that the extension light is securely connected to the main light string via the waterproof connectors.
3. **Reset Control Box:** Turn the power back on. Locate the control box of your main Govee Permanent Outdoor Lights kit and press the reset button for approximately 5 seconds. This can help the system recognize the new extension.
4. **Check for Damage:** Inspect the extension light strip and connectors for any visible damage.

If the issue persists, refer to the full user manual for your main Govee Permanent Outdoor Lights kit or contact Govee customer support.

Specifications

Feature	Detail
Brand	Govee
Model Number	H1075
Length	16.4ft (5m)
Color	Multicolor (RGBIC)
Light Source Type	LED
Indoor/Outdoor Usage	Outdoor
Water Resistance Level	IP67 (Lights), IP65 (Control Box/Adapter - from main kit)
Operating Temperature	-4°F to 140°F (-20°C to 60°C)
Average Life	50,000 Hours
Connectivity	Bluetooth, Wi-Fi
Control Method	App, Voice

Warranty and Support

For warranty information and customer support, please refer to the documentation included with your original Govee Permanent Outdoor Lights kit or visit the official Govee website. You can also find support and FAQs on the Govee Store

on Amazon.

© 2024 Govee. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B0BKGDW9L4

More documents and user manuals: **https://manuals.plus/**