

## Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [OLIGHT](#) /

› [OLIGHT Baton3 Pro User Manual](#)

## OLIGHT Baton3 Pro

# OLIGHT Baton3 Pro User Manual

Model: Baton3 Pro | Brand: OLIGHT

## INTRODUCTION

This user manual provides detailed instructions for the safe and effective operation of your OLIGHT Baton3 Pro EDC Rechargeable Flashlight. The Baton3 Pro is a powerful and versatile everyday carry flashlight, featuring a maximum output of 1500 lumens, a beam distance of 175 meters, and an impressive runtime of up to 120 days on its lowest setting. It is designed for various applications, including indoor tasks, outdoor activities, and extended work use.



Image: The OLIGHT Baton3 Pro flashlight, showcasing its compact design and side switch.

## WHAT'S IN THE BOX

Please ensure all the following components are included in your package:

- OLIGHT Baton3 Pro Flashlight
- L-shape Stand ×1
- Pouch ×1
- Battery (pre-installed)
- MCC3 Magnetic Charging Cable
- User Manual ×1 (this document)



**ALWAYS EASY TO FIND**

Made of magnetic stainless steel and backed with strong adhesive, the included L-stand is very convenient for storing the Baton3 Pro so that it is always easy to find.

And the curved side, a humanization design, protects you from injury if knocking against it accidentally.

\* It's also compatible with other Olight products that have similarly sized magnetic tail caps.

**Curved design**

**Compatible with other Olight products**

Image: The included L-shape stand, designed for convenient storage and easy access to your flashlight.

## SETUP

### Initial Charging

Before first use, fully charge your Baton3 Pro flashlight. Use the provided MCC3 USB magnetic charging cable. Attach the magnetic end of the cable to the tail cap of the flashlight. The indicator light on the charging cable will turn red while

charging and green when fully charged. A full charge typically takes approximately 3.5 hours.



## ONE STEP CHARGING

Rechargeable with Olight signature USB magnetic charging cable. Snap on and start charging.

Image: The Baton3 Pro connected to the MCC3 magnetic charging cable, illustrating the simple one-step charging process.

### Unlocking the Flashlight



The flashlight has a lock mode set by default for safety during shipping. To unlock, press and hold the side switch for more than 1 second until the light briefly flashes. To re-lock, press and hold the side switch for more than 2 seconds. The flashlight will also auto-lock if the battery level drops below 5% (indicated by a blinking red light).

## LOCKOUT FUNCTION

THE FLASHLIGHT HAS A LOCK MODE SET BY DEFAULT.  
PLEASE UNLOCK IT BEFORE FIRST USE.

### Lock/Unlock

Press and hold

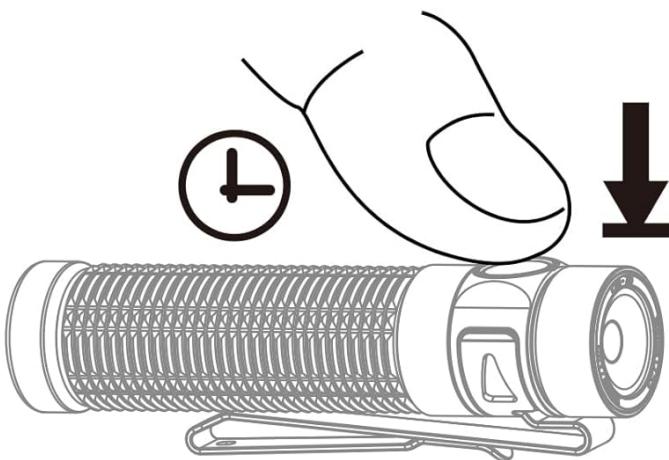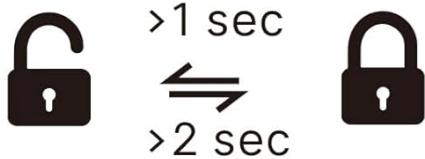

**! AUTO-LOCK IF BATTERY < 5% (BLINK RED)**

Image: Diagram illustrating the press and hold action on the side switch to lock and unlock the flashlight.

### Using the L-Shape Stand

The included L-shape stand is made of magnetic stainless steel with strong adhesive. It provides a convenient way to store your Baton3 Pro, ensuring it's always easy to find. The curved side of the stand is designed to prevent injury if accidentally bumped. The stand is also compatible with other Olight products that have similarly sized magnetic tail caps.

## OPERATION

### Basic Functions

- **Power On/Off:** Single press the side switch to turn the flashlight on or off.
- **Change Brightness Levels:** When the flashlight is on, press and hold the side switch to cycle through Low, Medium, and High modes. Release the switch to select the desired mode.
- **Moonlight Mode:** When the flashlight is off, press and hold the side switch for approximately 1 second to activate

Moonlight mode.

- **Turbo Mode:** Double-press the side switch quickly to activate Turbo mode. Double-press again to return to the previous brightness level.
- **Strobe Mode:** Triple-press the side switch quickly to activate Strobe mode. Single press to exit.

## EASY TO OPERATE

The new side switch with a concave design, whose **size increases by 56%**, is now even easier to operate, and it simultaneously reduces the chance of accidental activation, making for a much better interface overall.



Image: Comparison of the Baton3 Pro's larger, concave side switch with a previous model, highlighting improved ease of operation.

### Battery Level Indicator

The indicator light on the side switch provides real-time battery status:

- **Green:** Battery power is greater than 60%.
- **Orange:** Battery power is between 10% and 60%.
- **Red:** Battery power is between 5% and 10%.
- **Blinking Red:** Battery power is less than 5%. Recharge immediately.

**CHECK THE BATTERY CONDITION  
WITH THREE-COLOR POWER LEVEL INDICATION**



Image: The Baton3 Pro flashlight with its side switch illuminated green, indicating a high battery level. Insets show orange and red indicators for lower battery levels.

### Color Temperature Options

The Baton3 Pro is available in two color temperature options: Cool White (5700K~6700K) for enhanced concentration and Neutral White (4000K~5200K) for a natural and balanced light. Select the option that best suits your needs.

# Baton3 Pro

## ENHANCED POWER AND UPGRADED EXPERIENCE

Cool white

**5700-6700K**

(Enhances concentration)

Neutral white

**4000-5200K**

(Natural and balanced)

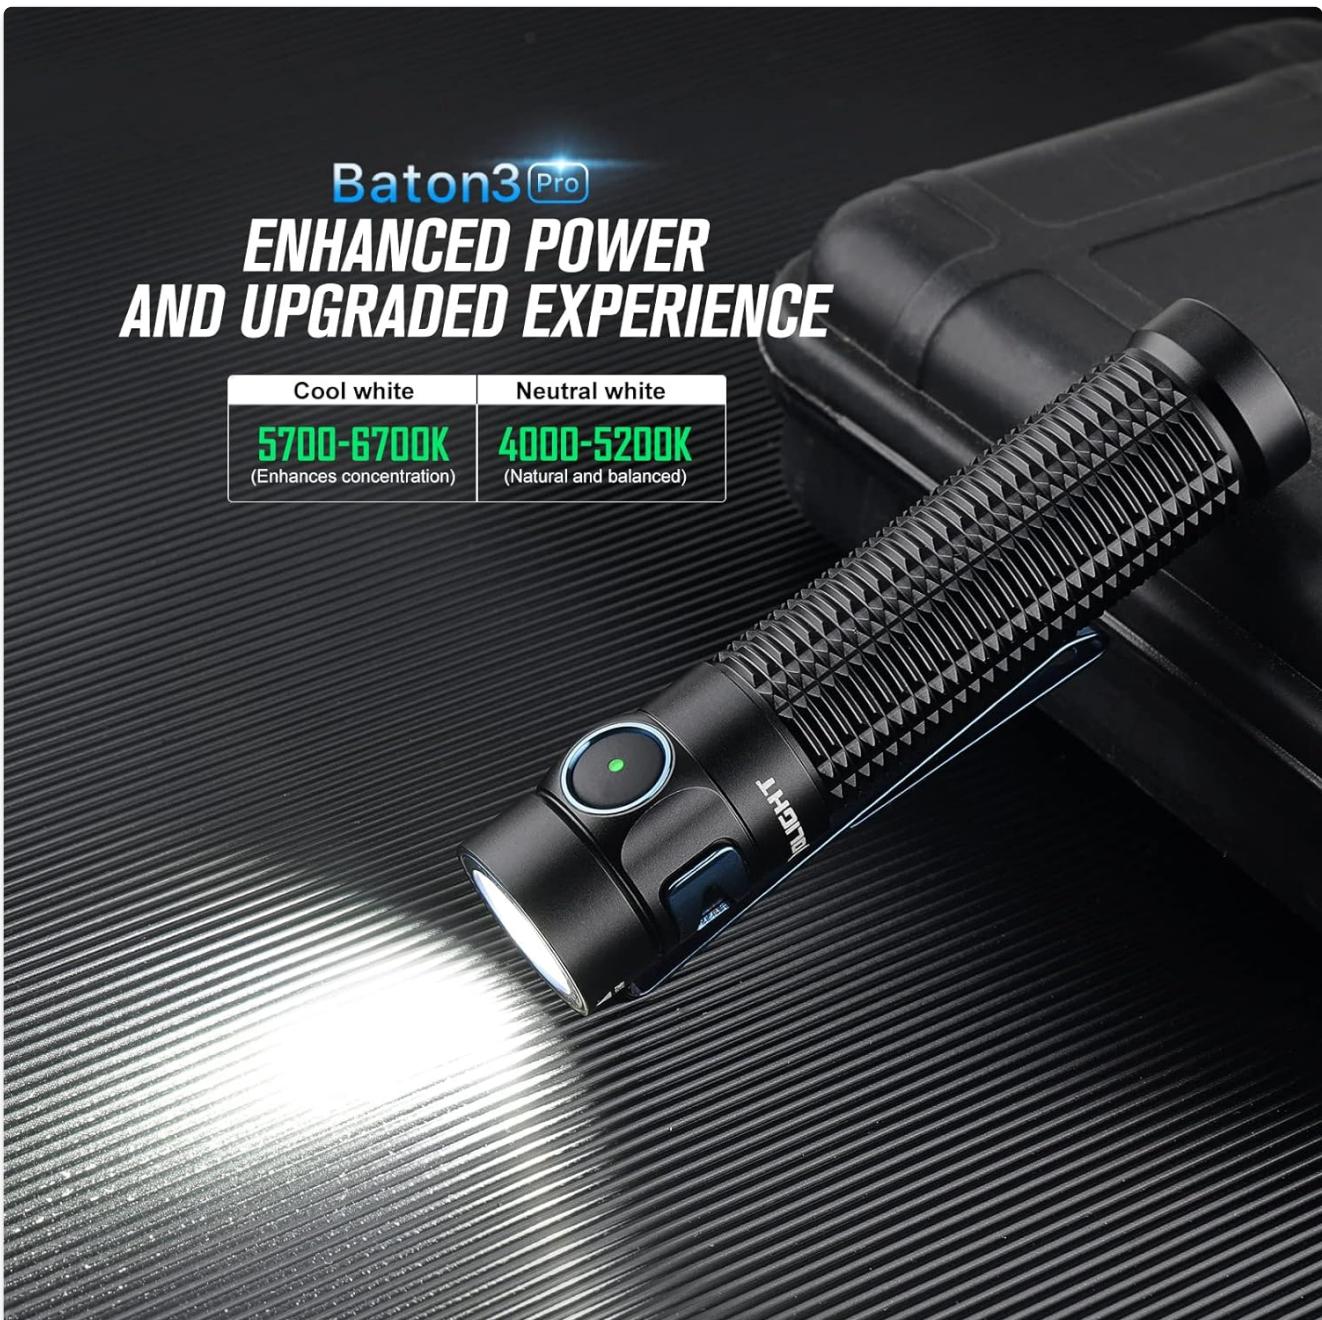


Image: The Baton3 Pro flashlight with text indicating the two available color temperature options: Cool White (5700-6700K) and Neutral White (4000-5200K).

### Two-Way Clip

The wider and longer two-way clip allows the flashlight to be securely carried in your pocket or backpack. Made of thicker steel, it offers greater durability and resistance to deformation, ensuring your flashlight stays in place.

# CARRY WITH CONFIDENCE

The wider and longer two-way clip is more secure on your pocket or backpack, and it is made using thicker steel for greater durability and resistance to deformation.



Image: The Baton3 Pro flashlight clipped to a pocket, demonstrating the secure and convenient carry provided by its two-way clip.

## MAINTENANCE

To ensure the longevity and optimal performance of your OLIGHT Baton3 Pro, follow these maintenance guidelines:

- **Cleaning:** Wipe the flashlight body with a clean, soft cloth. For stubborn dirt, a slightly damp cloth can be used. Avoid harsh chemicals or abrasive materials.
- **Threads and O-rings:** Periodically lubricate the threads and O-rings with silicone grease to maintain water resistance.
- **Battery Care:** If storing the flashlight for an extended period, charge the battery to approximately 50% and remove it from the device if possible (though the Baton3 Pro battery is integrated, ensure it's not fully depleted during long storage). Recharge every few months to prevent deep discharge.
- **Avoid Impact:** While durable, avoid dropping the flashlight or subjecting it to severe impacts, which could damage internal components.

## TROUBLESHOOTING

If you encounter issues with your Baton3 Pro, please refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Flashlight does not turn on.	Battery is depleted or in lockout mode.	Charge the battery. Unlock the flashlight by pressing and holding the side switch for >1 second.
Light output is dim or flickers.	Low battery or dirty contacts.	Recharge the battery. Clean the magnetic tail cap and charging cable contacts with a clean cloth.
Flashlight gets hot quickly.	Operating in Turbo or High mode for extended periods.	This is normal for high-output flashlights. Reduce brightness level if discomfort occurs. The flashlight has thermal management to prevent overheating.
Magnetic charging not working.	Dirty contacts or cable not properly connected.	Ensure the MCC3 cable is securely attached and contacts are clean. Try a different USB power source.

If the problem persists, please contact OLIGHT customer support for further assistance.

## SPECIFICATIONS

Key technical specifications for the OLIGHT Baton3 Pro flashlight:

**Light Output:** 1500 Lumens (Max)

**Beam Distance:** 175 Meters (Max)

**Runtime:** Up to 120 days (Moonlight mode)

**Power Source:** Battery Powered (1 Lithium Ion battery included)

**Charging:** MCC3 USB Magnetic Charging

**Material:** Aluminum

**Water Resistance:** IPX8 (Waterproof)

**Dimensions:** 1.98"D x 1.45"W x 5.82"H

**Item Weight:** 3.68 ounces

**Special Features:** Magnetic L-shaped stand, Long Range, IPX8 waterproof, Rechargeable

**Color Temperature Options:** Cool White (5700K~6700K) or Neutral White (4000K~5200K)

# POWERFUL EDC FLASHLIGHT

It delivers up to **1,500 lumens** output and **175 meters** beam distance, an increase of **30%** in both performance categories versus S2R II.

S2R II | **1,150<sup>Max</sup> Lumens** | **135<sup>Max</sup> Meters**

Baton3 pro | **1,500<sup>Max</sup> Lumens** | **175<sup>Max</sup> Meters**

And it will run for up to **120 days (4 months)** at its lowest level.



Image: A visual comparison showing the Baton3 Pro's superior lumen output and beam distance compared to a previous model, highlighting its powerful EDC capabilities.

## WARRANTY INFORMATION

OLIGHT provides a **Lifetime Warranty** for the Baton3 Pro flashlight, covering defects in material and workmanship under normal use. This warranty ensures long-term reliability and customer satisfaction. For detailed warranty terms and conditions, please refer to the official OLIGHT website or contact customer support.


## SUPPORT

For additional support, frequently asked questions, or to purchase accessories, please visit the official OLIGHT resources:

- **Official User Manual (PDF):** [Download PDF](#)
- **OLIGHT Brand Store:** [Visit OLIGHT Store on Amazon](#)
- **Customer Service:** Refer to the contact information provided on the official OLIGHT website for direct support.

© 2025 OLIGHT. All rights reserved.

## Related Documents - Baton3 Pro

	<p><a href="#">Olight Baton 3 Pro Flashlight User Manual</a></p> <p>Comprehensive user manual for the Olight Baton 3 Pro flashlight, detailing features, operation, and warranty information. Includes multi-language support and technical specifications.</p>
	<p><a href="#">Olight Baton 4 Copper Damascus User Manual - High Performance EDC Flashlight</a></p> <p>Comprehensive user manual for the Olight Baton 4 Copper Damascus flashlight, detailing its features, operation, specifications, and safety guidelines. Learn how to use and charge this high-performance EDC flashlight.</p>
	<p><a href="#">Olight Warrior 3S Flashlight User Manual</a></p> <p>Comprehensive user manual for the Olight Warrior 3S flashlight, detailing operation, specifications, charging, safety features, and warranty information.</p>
	<p><a href="#">Olight Warrior X Pro User Manual - Powerful LED Flashlight</a></p> <p>Comprehensive user manual for the Olight Warrior X Pro flashlight, detailing its operation, battery installation, charging, specifications, and warranty information.</p>
	<p><a href="#">Olight Seeker 4 Pro User Manual</a></p> <p>Comprehensive user manual for the Olight Seeker 4 Pro flashlight, detailing specifications, operation, safety precautions, and warranty information. Learn how to use its various modes, charging, lockout features, and holster functions.</p>
	<p><a href="#">Olight O'Pen Glow User Manual - Pen Light Instructions</a></p> <p>Comprehensive user manual for the Olight O'Pen Glow EDC pen light, detailing features, specifications, operating instructions, and warranty information.</p>