

## Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

- › [Contixo](#) /
- › [Contixo E9 Smart Floodlight Security Camera User Manual](#)

## Contixo E9

# Contixo E9 Smart Floodlight Security Camera User Manual

Model: E9

## 1. INTRODUCTION

The Contixo E9 Smart Floodlight Security Camera is designed to provide comprehensive outdoor surveillance with advanced features. This manual will guide you through the installation, setup, and operation of your new security camera, ensuring optimal performance and security for your property.

### Key Features:

- **2.5K (3MP) Full HD Video:** High-resolution live streaming and recording.
- **Adjustable Bright Floodlight:** Up to 1000 Lumens for enhanced visibility and deterrence.
- **Colored & Infrared Night Vision:** Clear surveillance even in low-light conditions.
- **Two-Way Audio:** Communicate with visitors or deter intruders remotely.
- **PIR Motion Detection:** Accurate detection with customizable sensitivity.
- **Siren Alarm:** Deter unwanted activity with an audible alarm.
- **IP65 Weatherproof:** Durable design for outdoor use in various weather conditions.
- **Cloud/SD Card Storage:** Flexible options for video footage storage.
- **Smart App Control:** Manage settings and view feeds via the Xodo Smart App.
- **Voice Assistant Integration:** Compatible with Amazon Alexa and Google Assistant.

## 2. WHAT'S IN THE BOX

Please check the contents of your package to ensure all items are present and in good condition.

- 1x Contixo E9 Smart Floodlight Security Camera
- 1x User Manual (this document)
- 4x Mounting Screws
- 1x USB Cable
- 1x Power Adapter

## 3. SETUP AND INSTALLATION

Follow these steps to install and set up your Contixo E9 camera.

### 3.1 Pre-Installation Checklist

- Ensure you have a 2.4GHz Wi-Fi network available at the installation location. The camera does not support 5GHz Wi-Fi.
- Identify a suitable outdoor location with access to a power outlet. The camera requires a wired power connection and is not battery-operated.
- Download the [Xodo Smart App](#) from your smartphone's app store (iOS or Android).

### 3.2 Physical Installation

1. **Choose a Mounting Location:** Select a location that provides the desired viewing angle and is within reach of a power outlet. The camera is IP65 weatherproof, suitable for outdoor environments.
2. **Mount the Camera:** Use the provided screws to securely mount the camera to a wall or suitable surface. Ensure the mounting is stable.
3. **Connect Power:** Plug the USB cable into the camera and connect the power adapter to a nearby electrical outlet. The camera will power on.

## ***Easy DIY Installation***

**with the 2.5m USB Power Cable and Plug Adaptor**  
**It is necessary to prepare a socket, because it only supports plugs for power with the Plug Adapter.**

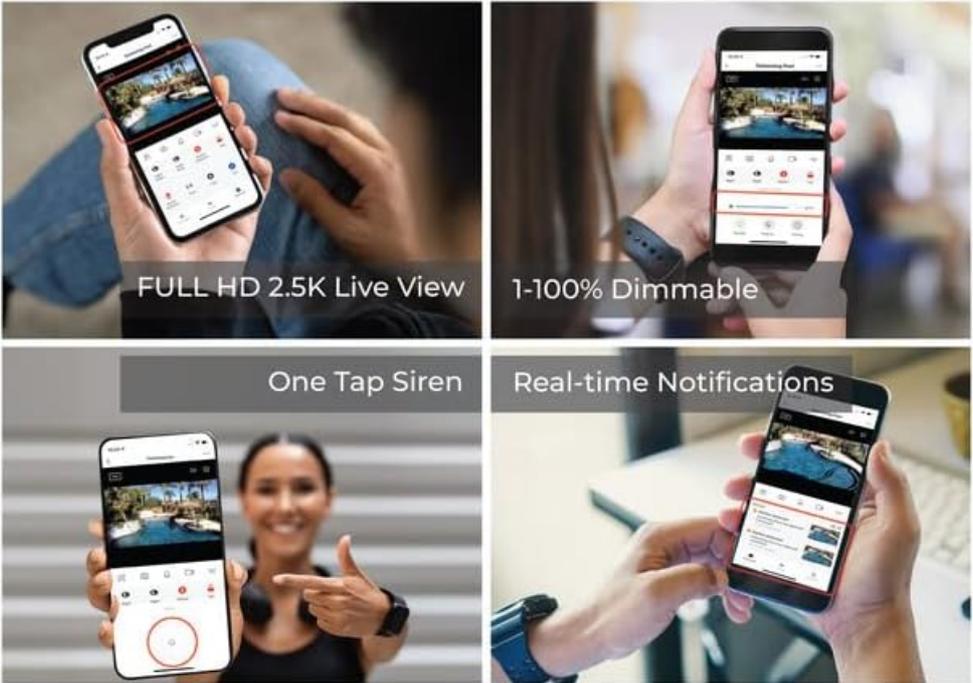


Image: The Contixo E9 camera showing its USB power cable and plug adaptor, highlighting the easy DIY installation process. A power

socket is required for operation.

### 3.3 App Setup and Pairing

1. **Open Xodo Smart App:** Launch the Xodo Smart App on your smartphone. If you are a new user, register an account.
2. **Add Device:** Tap the "+" icon or "Add Device" to begin the pairing process. Select "Security Camera" or "Smart Floodlight Camera" from the device list.
3. **Follow On-Screen Prompts:** The app will guide you through connecting the camera to your 2.4GHz Wi-Fi network. This typically involves scanning a QR code displayed on your phone with the camera lens.
4. **Name Your Camera:** Once connected, assign a name to your camera (e.g., "Front Yard Camera," "Back Door Floodlight").



**Complete Control from Smart Life App**

Dimming your lights, receive real-time notification on your phone and tablet, get real-time video and audio with the Live View button, and save and share videos and photos. By customizing settings, control everything with one simple app.

Image: A smartphone screen showing the Xodo Smart App, illustrating the various controls available for the camera, including live view, dimming, siren activation, and real-time notifications.

## 4. OPERATING INSTRUCTIONS

Learn how to use the various functions of your Contixo E9 camera.

### 4.1 Live View and Recording

- **Access Live Feed:** Open the Xodo Smart App and select your camera to view the live 2.5K HD video stream.
- **Manual Recording/Snapshots:** Use the controls within the app to manually record video or take still images from the live feed.
- **Playback:** Access recorded footage from the cloud storage (subscription required) or a locally inserted Micro SD card (not included).



Image: The Contixo E9 camera mounted on a building, with a smartphone showing its live 2.5K Full HD video feed, demonstrating real-time monitoring.

## 4.2 Two-Way Audio

The camera features a built-in microphone and speaker for two-way communication.

- **Initiate Talk:** While viewing the live feed, tap the microphone icon in the app to speak through the camera's speaker.
- **Listen:** The camera's microphone will pick up audio from its surroundings, allowing you to hear what's happening.



Image: A visual representation of the two-way audio feature, showing a user communicating with a delivery person via the camera.

### 4.3 Motion Detection and Alerts

The E9 camera uses PIR motion detection to identify activity and send alerts.

- **Enable/Disable:** Adjust motion detection settings within the Xodo Smart App.
- **Sensitivity:** Customize the PIR sensitivity to reduce false alarms (e.g., from passing cars or small animals).
- **Notifications:** Receive instant push notifications on your smartphone when motion is detected.
- **Siren Alarm:** Activate the built-in siren manually or set it to trigger automatically upon motion detection via the app.



Image: The Contixo E9 camera detecting a figure at night, with icons indicating flashlight alarm, siren alert, and motion detection notifications, highlighting its security capabilities.

#### 4.4 Night Vision and Floodlight Control

The E9 camera offers versatile night vision options and an adjustable floodlight.

- **Colored Night Vision:** The floodlight can illuminate the area to provide full-color video at night.
- **Infrared Night Vision:** For discreet monitoring, the camera can use infrared LEDs for black and white night vision without the floodlight.
- **Floodlight Brightness:** Adjust the floodlight brightness (800lm-1000lm) and schedule its operation through the Xodo Smart App.



Image: Comparison of Smart Mode, Color Light Mode, and Infrared Mode for night vision, illustrating the camera's ability to provide clear footage in various lighting conditions.

#### 4.5 Smart Assistant Integration

Integrate your Contixo E9 camera with Amazon Alexa or Google Assistant for voice control.

- **Connect Accounts:** Link your Xodo Smart account to your Alexa or Google Home app.
- **Voice Commands:** Use commands like "Alexa, show me the backyard" or "Hey Google, show the front door camera" to view your live feed on compatible smart displays.

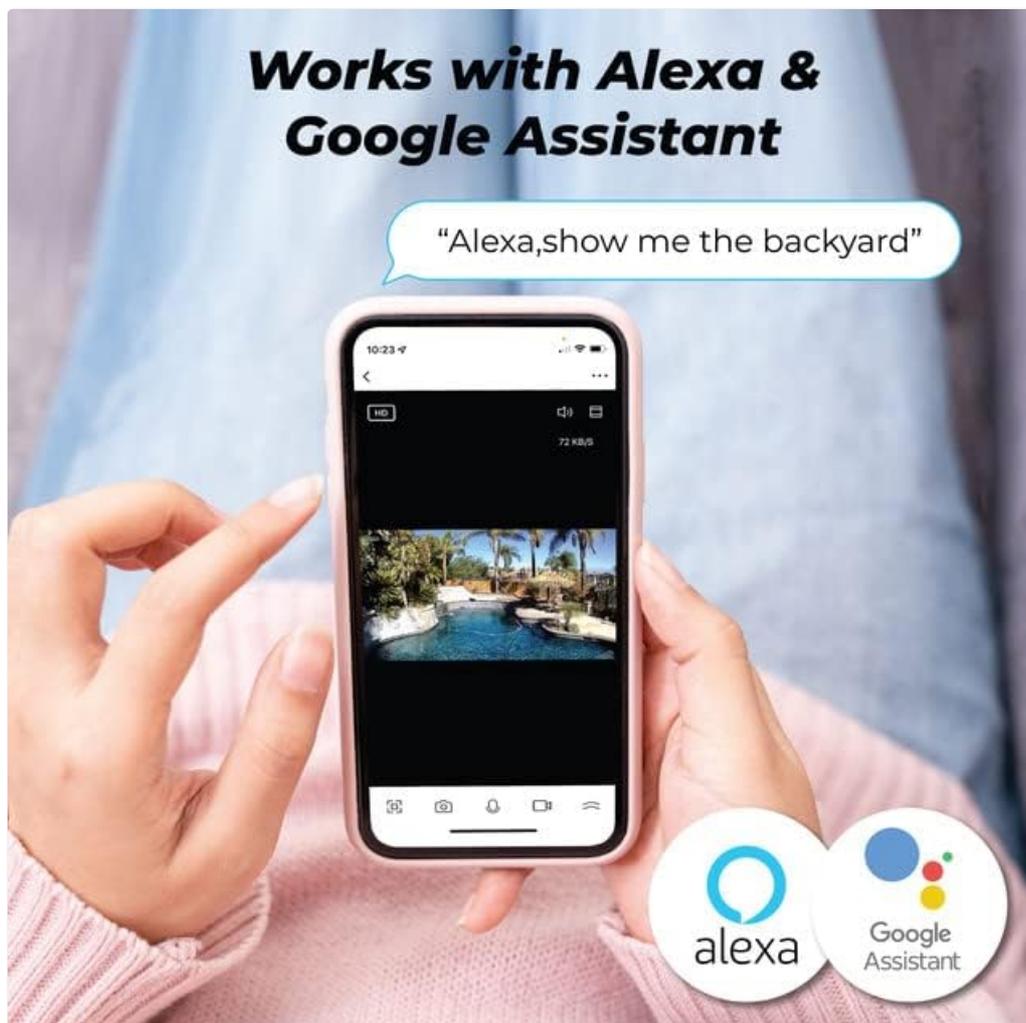


Image: A user interacting with a smart assistant to view the camera feed, highlighting compatibility with Amazon Alexa and Google Assistant.

## 5. MAINTENANCE

Proper maintenance ensures the longevity and optimal performance of your camera.

- **Cleaning:** Periodically clean the camera lens and floodlight cover with a soft, damp cloth to remove dust and debris. Do not use harsh chemicals.
- **Firmware Updates:** Regularly check the Xodo Smart App for available firmware updates. Updates often include performance improvements and security enhancements.
- **Power Connection:** Ensure the power cable remains securely connected and free from damage.

## 6. TROUBLESHOOTING

If you encounter issues with your Contixo E9 camera, refer to the following common solutions.

Problem	Possible Solution
Camera not connecting to Wi-Fi.	<ul style="list-style-type: none"><li>◦ Ensure your Wi-Fi network is 2.4GHz. The camera does not support 5GHz.</li><li>◦ Check that your Wi-Fi signal strength is adequate at the camera's location.</li><li>◦ Restart your router and the camera.</li><li>◦ Ensure you are entering the correct Wi-Fi password.</li></ul>
No live view or recording.	<ul style="list-style-type: none"><li>◦ Verify the camera is powered on and connected to Wi-Fi.</li><li>◦ Check your internet connection.</li><li>◦ Ensure the Xodo Smart App is up to date.</li></ul>
Motion detection is too sensitive/not sensitive enough.	<ul style="list-style-type: none"><li>◦ Adjust the PIR sensitivity settings within the Xodo Smart App.</li><li>◦ Consider the camera's placement to minimize unwanted triggers (e.g., tree branches, busy roads).</li></ul>
Two-way audio is unclear or not working.	<ul style="list-style-type: none"><li>◦ Ensure your phone's microphone is not muted and volume is up.</li><li>◦ Check the camera's microphone and speaker for any obstructions.</li><li>◦ Verify a stable internet connection for clear audio transmission.</li></ul>

If these solutions do not resolve your issue, please contact Contixo customer support.

## 7. SPECIFICATIONS

Feature	Detail
Model Name	E9
Video Resolution	2.5K (3MP), 2304 pixels
Connectivity	Wired Power, Wi-Fi (2.4GHz only)
Night Vision	Colored & Infrared Night Vision

Feature	Detail
Floodlight Brightness	800lm-1000lm (Adjustable)
Audio	2-Way Audio (Microphone & Speaker)
Motion Detection	PIR Motion Sensor
Storage Options	Cloud Storage (subscription), Micro SD Card (not included)
Weatherproof Rating	IP65
Compatible Devices	Smartphone (iOS/Android), Amazon Alexa, Google Assistant
Power Source	Corded Electric
Item Dimensions	7.1 x 4.7 x 5.5 inches
Item Weight	1.4 Pounds

## 8. WARRANTY AND SUPPORT

---

### 8.1 Warranty Information

Contixo products are covered by a limited warranty. For specific details regarding your product's warranty period and terms, please refer to the warranty card included in your product packaging or visit the official Contixo website.

### 8.2 Customer Support

If you require further assistance, technical support, or have questions not covered in this manual, please contact Contixo customer support:

- **Online Support:** Visit the [Contixo Store on Amazon](#) or their official website for FAQs and support resources.
- **Contact Information:** Refer to your product packaging or the Contixo website for the most current contact details (phone, email).

