

**YOCUNKER HKFBA-WC0060-W+DZ0118-US-W**

# YOCUNKER T2 2-in-1 Wireless Charger Instruction Manual

Model: HKFBA-WC0060-W+DZ0118-US-W

## INTRODUCTION

---

Thank you for purchasing the YOCUNKER T2 2-in-1 Wireless Charger. This device is designed to efficiently charge two Qi-compatible devices simultaneously, such as smartphones and TWS earphones. Please read this manual thoroughly before use to ensure proper operation and to maximize the product's lifespan.

## PACKAGE CONTENTS

---

Verify that all items listed below are included in your package:

- 1 x YOCUNKER T2 2-in-1 Wireless Charging Pad
- 1 x USB Type-C Charging Cable
- 1 x 18W QC3.0 Power Adapter
- 1 x User Manual

Slim Design  
**PROTABLE**  
Travel Necessary

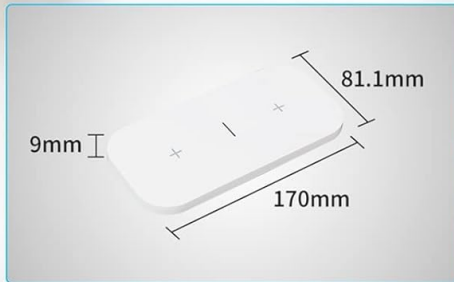


Image: The package contents, showing the white wireless charging pad, a white USB-C cable, a white 18W QC3.0 wall adapter, and the user manual.

## PRODUCT OVERVIEW

The YOCUNKER T2 wireless charging pad features two distinct charging areas, allowing for simultaneous charging of two Qi-compatible devices. An indicator light provides charging status feedback.

# What will you get?

1 x Type C Charging Cable

1 x Wireless Charger

1 x User Manual

1 x 18W Adapter



Image: Detailed view of the charging pad, showing the two charging areas marked with '+' and 'x' symbols, the non-slip feet on the bottom, and the central indicator light.

## SETUP INSTRUCTIONS

1. Connect the provided USB Type-C charging cable to the input port on the YOCUNKER T2 wireless charging pad.
2. Plug the other end of the USB Type-C cable into the included 18W QC3.0 power adapter.
3. Insert the 18W QC3.0 power adapter into a standard wall outlet.
4. The charging pad is now ready for use.

# 2-IN-1 Wireless Charger Pad



Smart Phone



Earphone

Small and Convenient Wireless Charging Pad

Image: The wireless charging pad in use, showing the power adapter plugged into a wall socket and the charging pad with two phones placed on it.

## OPERATING INSTRUCTIONS

### Placing Devices for Charging:

- Place your Qi-compatible smartphone or TWS earphone case onto one of the designated charging areas on the pad.
- Ensure the device's charging coil is aligned with the charging area of the pad. The charging area for most smartphones/TWS earphones is typically in the middle of the device.
- The indicator light on the charging pad will illuminate to confirm that charging has begun.
- You can charge two devices simultaneously, one on each charging area.

## A Variety of Charging Combination Modes, Easy Life



Image: Examples of different devices (smartphones and TWS earbud cases) being charged on the YOCUNKER T2 wireless charging pad, demonstrating its dual charging capability.

### Charging Speeds:

- **Smartphones:** Up to 10W (for Samsung devices), 7.5W (for iPhone devices), and 5W for other Qi-enabled phones.
- **TWS Earphones:** 5W.

For optimal fast charging, always use the included 18W QC3.0 adapter.



Image: Visual representation of the charging pad's power output for different devices: 5W for AirPods/other Qi phones, 10W for Samsung, and 7.5W for iPhone.

## Compatibility:

This charger is compatible with a wide range of Qi-enabled devices, including:

- **iPhones:** 14 Pro Max/Pro/Plus/14, 13 Pro Max/Pro/mini/13, 12 Pro Max/Pro/mini/12, 11 series, X series, 8/8 Plus.
- **Samsung Galaxy:** S22/S21 Ultra 5G/S21+/S21/S20 FE/S20 Ultra/S20+/S20/S10/S10 Plus, Note series.
- **TWS Earphones:** AirPods Pro/3/2, Galaxy Buds/Buds+/Buds Live, Pixel Buds, and other Qi-compatible TWS earphones.

# Universal Compatible

## For iPhone charge 7.5W :



13 Pro Max/13 Pro/13 Mini/13  
12 Pro Max/12 Pro/12 Mini/12



11 Pro Max/11 Pro/11



iPhone XS / XS Max / XR /  
X / 8 / 8 Plus / SE 2020

## For Samsung Charge 10w :



Samsung Galaxy S21 / S21 Plus / S21 Ultra /  
S20 / S20 Plus / S10 / S10 Plus / S10e / S9 / S8 / S7 / S6  
Edge Plus / Galaxy Note 20 / Note 10 / Note 9 / Note 8 / Note 7



## For Earbuds 5W Charge :



Airpods Pro/2/3



Image: A visual guide to device compatibility, listing specific iPhone models for 7.5W charging, Samsung Galaxy models for 10W charging, and various earbuds for 5W charging.

## MAINTENANCE AND SAFETY GUIDELINES

- Ensure your device is Qi wireless charging compatible before use.
- Remove thick cases (over 6mm), metal cases, magnetic cases, notebook-style cases, smartphone rings, credit cards, coins, or any metal objects from your device before charging. These can interfere with charging or cause overheating.
- Use the original charging cable and adapter provided with the wireless charger for optimal performance and safety.
- Operate the charger in an indoor, dry environment. Avoid high temperatures, humidity, strong static electricity, or strong magnetic fields.
- Do not use the charger if water or dirt is present on its surface or ports.
- Unplug the charger when not in use or when you need to stop charging.

### Built-in Safety Features:

The YOCUNKER T2 wireless charger incorporates multiple safety protections:

- Over-voltage Protection

- Over-current Protection
- Over-temperature Protection
- Short Circuit Protection
- Over-charge Protection
- Shunt Protection



Image: Graphical representation of the charger's superior safety features, including protections against over-voltage, over-current, over-temperature, short circuits, over-charging, and shunting.



Image: A visual guide on case compatibility, showing that cases up to 5mm thick are acceptable, while credit cards, metal rings, metal cases, and socket cases are not recommended for use during charging.

## TROUBLESHOOTING

If you experience issues such as your device not charging, charging slowly, or the charger generating excessive heat, consider the following:

1. **Verify Qi Compatibility:** Ensure your device supports Qi wireless charging.
2. **Check Device Alignment:** Correctly align the charging area of your device with the charging area on the wireless pad. The charging coil is usually in the center of your device.
3. **Remove Obstructions:** Remove any thick cases (6mm or more), metal cases, magnetic cases, smartphone rings, credit cards, coins, or other metal objects from your device. These can prevent charging or cause overheating.
4. **Use Correct Adapter:** Ensure you are using the included 18W QC3.0 adapter and the original USB

Type-C cable. Using a lower-power adapter may result in slow charging or no charging.

- 5. Environmental Factors:** Avoid using the charger in environments with high temperatures, humidity, strong static electricity, or strong magnetic fields.
- 6. Restart:** Disconnect the charger from power, wait a few seconds, and then reconnect it. Re-place your device on the charging pad.

## SPECIFICATIONS

<b>Model Number</b>	HKFBA-WC0060-W+DZ0118-US-W
<b>Product Dimensions</b>	3.23 x 0.47 x 6.69 inches (approx. 8.2 x 1.2 x 17 cm)
<b>Item Weight</b>	4 ounces (approx. 114g)
<b>Input</b>	Requires 5V-3A/9V-2A QC3.0 adapter (18W QC3.0 adapter included)
<b>Output (Smartphone)</b>	5W / 7.5W / 10W
<b>Output (TWS Earphone)</b>	5W
<b>Connector Type</b>	USB Type-C
<b>Compatible Devices</b>	Qi-enabled smartphones, TWS earphones
<b>Special Features</b>	2-in-1 Wireless Charging, Short Circuit Protection, Travel-friendly design
<b>Color</b>	White

## WARRANTY AND SUPPORT

YOCUNKER products are designed for reliability and performance. For warranty information or technical support, please refer to the contact details provided on the product packaging or visit the official YOCUNKER website. Please retain your proof of purchase for warranty claims.