

## UREVO URTM025

# UREVO URTM025 Under Desk Treadmill User Manual

Model: URTM025

## 1. INTRODUCTION

The UREVO URTM025 Under Desk Treadmill is designed to integrate physical activity into your daily routine, whether at home or in the office. This portable walking pad allows for low-impact exercise, helping to improve fitness, reduce sedentary time, and support overall well-being. Its compact design and quiet operation make it suitable for various environments.



Image: The UREVO URTM025 Under Desk Treadmill in use, showing a woman walking on it while another uses it with a standing desk. This illustrates its primary function as a walking pad for active work or home use.

## 2. SAFETY INFORMATION

Please read all instructions carefully before using the treadmill. Retain this manual for future reference. Failure to follow these safety guidelines may result in injury or damage to the product.

- **Placement:** Place the treadmill on a flat, stable surface. Ensure adequate clear space (at least 2 feet) around the treadmill for safe operation.
- **Power:** Connect the treadmill to a grounded electrical outlet. Do not use extension cords or adapters.
- **User Weight:** Do not exceed the maximum user weight of 242 pounds (110 kg).
- **Children and Pets:** Keep children and pets away from the treadmill during operation.
- **Attire:** Wear appropriate athletic footwear and clothing. Avoid loose clothing that could get caught in moving parts.
- **Emergency Stop:** Familiarize yourself with the location and function of the safety key/emergency stop

feature. Always attach the safety key clip to your clothing before starting.

- **Health:** Consult a physician before starting any new exercise program. Stop immediately if you feel faint, dizzy, or experience pain.
- **Maintenance:** Unplug the treadmill before cleaning or performing any maintenance.

### 3. PACKAGE CONTENTS

Verify that all components are present in the package. If any items are missing or damaged, contact customer support.

- UREVO URTM025 Under Desk Treadmill
- User Manual
- Power Cord
- Remote Control
- CR2025 Coin Battery (for remote)
- Hex Tool
- Lubricant (2 bottles)

#### Package Including

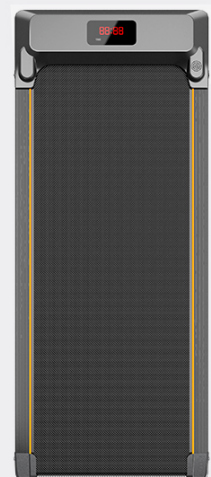
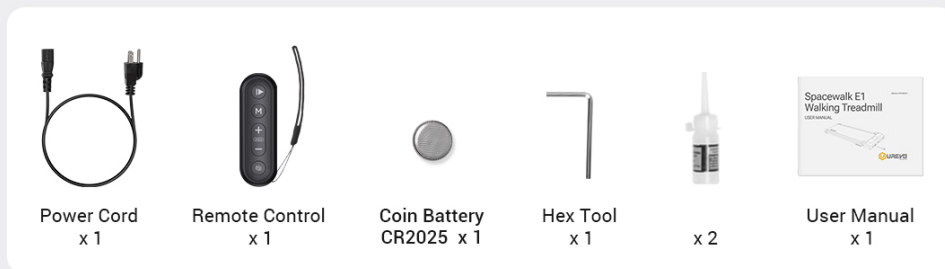


Image: A visual representation of the items included in the UREVO URTM025 package, such as the power cord, remote control, battery, hex tool, lubricant, and user manual.

### 4. SETUP

Follow these steps for initial setup of your UREVO URTM025 Under Desk Treadmill.

1. **Unboxing:** Carefully remove the treadmill and all components from the packaging. It is recommended to have two people for lifting the unit.
2. **Placement:** Position the treadmill on a firm, level surface. Ensure there is sufficient space around the unit for safe movement and ventilation. The treadmill is designed to be compact and can be placed under a standing desk or in a dedicated exercise area.
3. **Power Connection:** Locate the power input port on the treadmill. Connect the provided power cord to the treadmill and then plug it into a standard grounded electrical outlet.
4. **Remote Control Battery:** Open the battery compartment on the remote control and insert the provided

CR2025 coin battery, ensuring correct polarity.

5. **Initial Lubrication Check:** The treadmill is pre-lubricated from the factory. However, it is good practice to check the running belt for adequate lubrication before first use. Refer to the Maintenance section for lubrication instructions if needed.

## Portable, Easy to move and storage



Image: A woman demonstrating the portability of the UREVO URTM025 treadmill by lifting it, highlighting its slim profile for easy storage.

## 5. OPERATING INSTRUCTIONS

Learn how to operate your UREVO URTM025 treadmill for an effective workout.

## 5.1 Powering On/Off

- **Power On:** Plug in the treadmill and press the main power switch (usually located near the power cord input). The LED display will illuminate.
- **Power Off:** Press the main power switch to turn off the treadmill. For extended periods of non-use, unplug the power cord from the wall outlet.

## 5.2 Using the Remote Control

The remote control allows you to start, stop, and adjust the speed of the treadmill.

- **Start:** Press the 'Start' button on the remote. The treadmill will begin with a countdown (e.g., 3-2-1) and then start at the minimum speed (0.6 MPH).
- **Stop:** Press the 'Stop' button on the remote to gradually decrease the speed and bring the treadmill to a halt.
- **Speed Adjustment:** Use the '+' button to increase speed and the '-' button to decrease speed. The speed range is 0.6 to 4.0 MPH.

## 5.3 LED Display

The integrated LED display shows important workout data:

- **Time:** Duration of your workout.
- **Speed:** Current walking speed.
- **Distance:** Total distance covered during the workout.
- **Calories:** Estimated calories burned.



# LED Display & Remote Control



Image: A detailed view of the UREVO URTM025's LED display, illustrating the workout metrics (time, speed, distance, calories) and the remote control for easy operation.

## 5.4 Safety Key

The safety key is a crucial safety feature. Attach the clip of the safety key to your clothing. If the safety key is detached from the treadmill, the unit will immediately stop, preventing potential falls or injuries.

## 6. MAINTENANCE

Regular maintenance ensures the longevity and optimal performance of your treadmill.

### 6.1 Lubrication

The running belt requires periodic lubrication to reduce friction and wear. Lubricate the belt every 100 hours of use or once a year, whichever comes first.

1. **Power Off:** Unplug the treadmill from the power outlet.
2. **Lift Belt:** Gently lift one side of the running belt.
3. **Apply Lubricant:** Apply a small amount (approximately 5-10 ml) of the provided silicone lubricant in a Z-pattern directly onto the center of the deck, underneath the running belt. Repeat on the other side.
4. **Distribute:** Plug in the treadmill and run it at a low speed (e.g., 1-2 MPH) for 3-5 minutes without anyone on it to evenly distribute the lubricant.

### 6.2 Belt Adjustment

If the running belt shifts to one side or feels loose, it may need adjustment.

- **Centering the Belt:** If the belt drifts to the left, turn the left rear roller bolt clockwise a quarter turn. If it drifts to the right, turn the right rear roller bolt clockwise a quarter turn. Run the treadmill for a few minutes and observe. Repeat if necessary until the belt is centered.
- **Tightening the Belt:** If the belt slips during use, it may be too loose. Turn both rear roller bolts clockwise a quarter turn simultaneously. Test the belt. Repeat if necessary, but do not overtighten.

### 6.3 Cleaning

Wipe down the treadmill regularly with a damp cloth. Avoid using abrasive cleaners or solvents.

## 7. TROUBLESHOOTING

Refer to this section for solutions to common issues. If the problem persists, contact customer support.

Problem	Possible Cause	Solution
Treadmill does not power on	Power cord not connected; Main power switch off; Outlet issue	Ensure power cord is securely plugged in; Turn on main power switch; Test outlet with another device
Running belt stops or slips	Safety key detached; Belt too loose; Motor overload	Reattach safety key; Adjust belt tension (see Maintenance); Reduce user weight or speed
Scraping sound during operation	Lack of lubrication; Belt misalignment; Foreign object	Lubricate the running belt (see Maintenance); Adjust belt centering (see Maintenance); Inspect for and remove any foreign objects
Remote control not working	Dead battery; Remote out of range; Interference	Replace CR2025 battery; Ensure remote is pointed at the treadmill's receiver; Minimize electronic interference
LED display not showing data	Loose connection; Sensor issue	Check all connections; Contact customer support if issue persists

## 8. SPECIFICATIONS

Detailed technical specifications for the UREVO URTM025 Under Desk Treadmill.

Feature	Specification
Model Name	URTM025
Product Dimensions (LxWxH)	46.8"D x 19.3"W x 4.8"H
Folded Size	46.57" x 19.29" x 4.45"
Item Weight	37.5 Pounds
Maximum Weight Recommendation	242 Pounds
Motor Power	2.0 Horsepower
Speed Range	0.6 - 4.0 Miles per Hour
Deck Length	40.2 Inches
Deck Width	15 Inches
Material	Alloy Steel
Display Type	LED
Power Source	Corded Electric
Input Power	220 Watts
Special Features	Compact Design, Lightweight, Portable, Shock Absorbent, Wheeled
Metrics Measured	Distance, Speed, Time



# Quiet & Powerful Motor



**2.0 HP**  
Motor Power



**0.6-4 mph**  
Speed Range



**< 45db**  
Low Noise

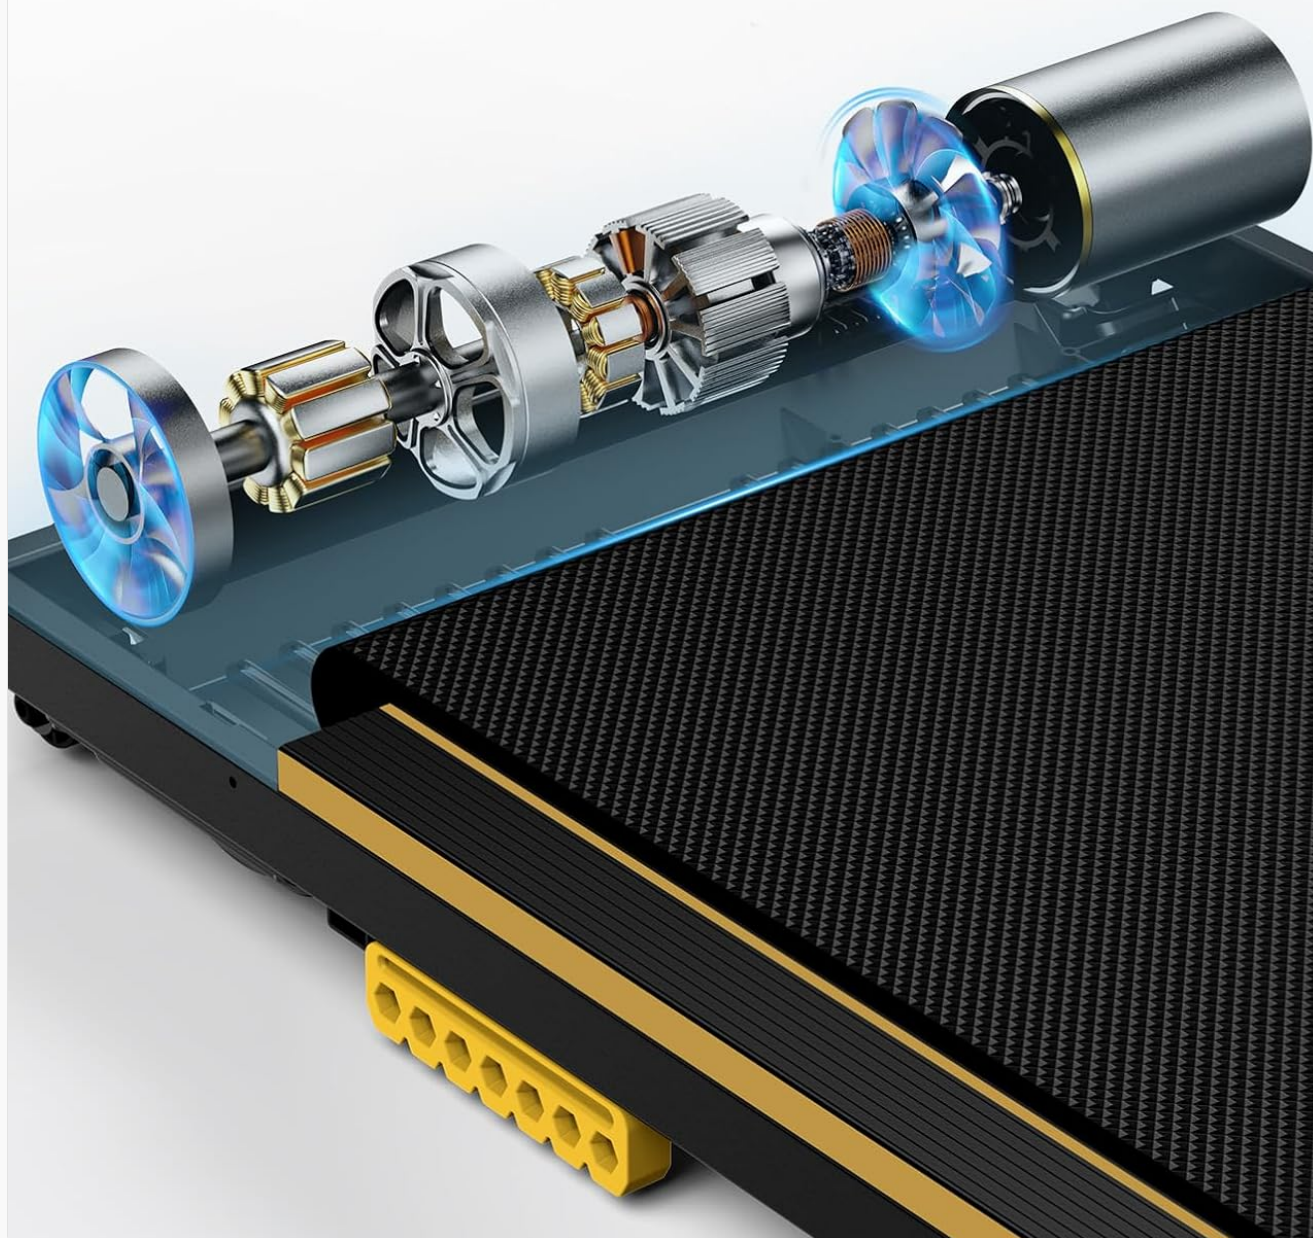


Image: An internal view of the UREVO URTM025 treadmill, showcasing its 2.0 HP motor, speed capabilities, and low noise design, indicating its powerful yet quiet operation.

## 9. WARRANTY AND SUPPORT







UREVO is committed to providing high-quality products and customer service.

- **Warranty:** The UREVO URTM025 Under Desk Treadmill comes with a one-year warranty from the date of purchase. This warranty covers manufacturing defects and malfunctions under normal use.
- **Technical Support:** UREVO offers 12 months of technical support to assist with any operational or technical questions you may have.
- **Customer Service:** For any inquiries, assistance, or to claim warranty service, please contact UREVO

customer support. We aim to provide satisfactory service to every customer.

© 2024 UREVO. All rights reserved.

Related Documents - URTM025

	<p><a href="#">Spacewalk E1 Walking Treadmill User Manual</a></p> <p>User manual for the UREVO Spacewalk E1 Walking Treadmill (Model URTM025), providing instructions for setup, operation, maintenance, safety, and warranty.</p>
	<p><a href="#">Spacewalk E1 Walking Treadmill User Manual</a></p> <p>Comprehensive user manual for the UREVO Spacewalk E1 Walking Treadmill (Model URTM025), covering safety instructions, specifications, operation, maintenance, and warranty.</p>
	<p><a href="#">UREVO Strol U1 Walking Treadmill User Manual</a></p> <p>Comprehensive user manual for the UREVO Strol U1 Walking Treadmill (Model URTM013), covering safety instructions, specifications, operation, maintenance, and warranty information.</p>
	<p><a href="#">UREVO Spacewalk 3S Walking Treadmill User Manual</a></p> <p>Discover how to safely operate and maintain your UREVO Spacewalk 3S Walking Treadmill with this comprehensive user manual. Includes setup, features, troubleshooting, and specifications.</p>
	<p><a href="#">UREVO Walking Pad Treadmill Handrail User Manual</a></p> <p>User manual for the UREVO Walking Pad Treadmill Handrail (Model URHD001), providing installation, usage, safety guidelines, and warranty information.</p>
	<p><a href="#">UREVO Strol Lite 2-in-1 Under Desk Treadmill User Manual</a></p> <p>This user manual provides comprehensive instructions for the UREVO Strol Lite 2-in-1 Under Desk Treadmill, model UR9TM0011. It covers assembly, operation, safety guidelines, maintenance, troubleshooting, and warranty information for this home fitness equipment.</p>

[\[pdf\]](#) User Manual Instructions Specifications Warranty Accessories

UREVO URTM025 Walking Treadmill User Manual 5 days ago — Spacewalk E1 USER MANUAL Model


Page 2 TABLE OF CONTENTS 02 CUSTOMER SERVICE 03 IMPORTANT SAFETY INSTRUCTIONS

urevo spacewalk e1 instrukcja eng maxelektro pl storage file pimcore import 2025 20

e383b57f354ffb0532048ef349142b0f |||

Spacewalk E1 Walking Treadmill USER MANUAL Model. **URTM025** TABLE OF CONTENTS 02 CUSTOMER SERVICE 03 IMPORTANT SAFETY INSTRUCTIONS 06 SAFETY NOTICE 09 SPECIFICATION 10 PRODUCT AND ACCESSORIES 11 PRODUCT INTRODUCTION 12 BEFORE START AND STORAGE 14 FUNTION MENU 15 REMOTE CONTROLLER 16 HOW TO USE 18 C...

lang: **score:31** filesize: 3.75 M page\_count: 12 document date: 2023-12-09

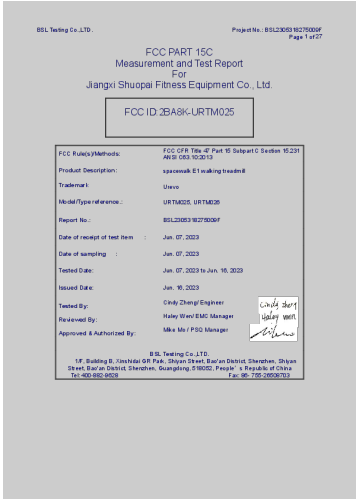


[\[pdf\]](#) Test Report

Measurement Report Kent Test reports Jiangxi Shuopai Fitness Equipment Co Ltd URTM025 spacewalk

E1 walking treadmill 2BA8K 2BA8KURTM025 urtm025

BSL Testing Co.,LTD. Project No.: BSL2305318275009F Page 1 of 27 FCC PART 15C Measurement and Test Report For Jiangxi Shuopai Fitness Equipment Co., Ltd. FCC ID:2BA8K-**URTM025** FCC Rule s /Methods: Product Description: Trademark Model/Type reference.: Report No.: Date of receipt of test item : Dat...

lang:tl **score:29** filesize: 1.98 M page\_count: 27 document date: 2023-06-27

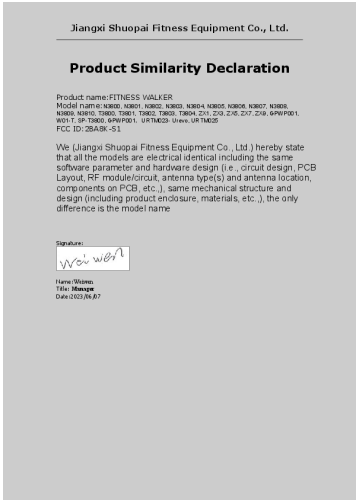




[\[pdf\]](#) Decleration of Conformity

Declaration of Conformity Family declaration Jiangxi Shuopai Fitness Equipment Co Ltd S1 FITNESS

WALKER 2BA8K 2BA8KS1 s1

Jiangxi Shuopai Fitness Equipment Co., Ltd. Product Similarity Declaration Product name:FITNESS WALKER Model name:N3800, N3801, N3802, N3803, N3804, N3805, N3806, N3807, N3808, N3809, N3810, T3800, T3801, T3802, T3803, T3804, ZX1, ZX3, ZX5, ZX7, ZX9, GPWP001, W01-T, SP-T3800, GPWP001URTM023-Urevo, ...

lang:en **score:21** filesize: 145.51 K page\_count: 1 document date: 2023-06-12

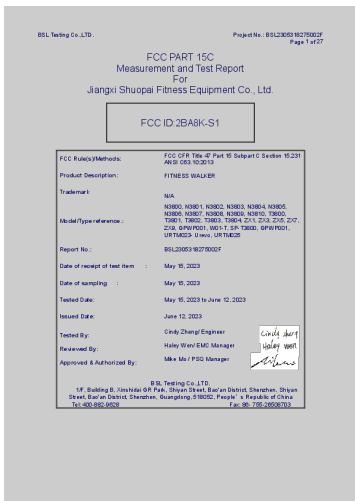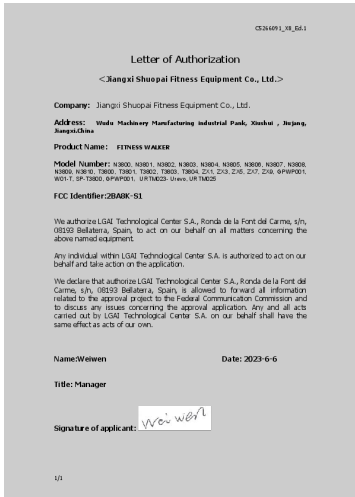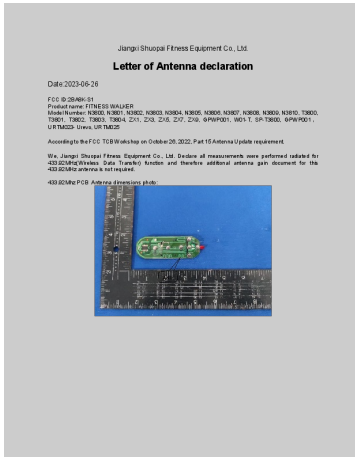

[pdf] Specifications Dimension Guide Declaration of Conformity

Professional Letter William Graff Antenna specifications Jiangxi Shuopai Fitness Equipment Co Ltd S1

FITNESS WALKER 2BA8K 2BA8KS1 s1

Jiangxi Shuopai Fitness Equipment Co., Ltd. Letter of Antenna declaration

Date:2023-06-26 FCC ID:2BA ... 1, T3802, T3803, T3804, ZX1, ZX3, ZX5, ZX7, ZX9, GPWP001, W01-T, SP-T3800, GPWP001 URTM023- Urevo, **URTM025** According to the FCC TCB Workshop on October 26, 2022, Part 15 Antenna Update requirement. W...

lang:en score:21 filesize: 328.92 K page\_count: 2 document date: 2023-06-12

[pdf]

Adria Galin Pons Letter Authorization Jiangxi Shuopai Fitness Equipment Co Ltd S1 FITNESS WALKER

2BA8K 2BA8KS1 s1

C5266091\_X8\_Ed.1 Letter of Authorization Jiangxi Shuopai Fitness Equipment Co.,

Ltd. Company: Jian ... 801, T3802, T3803, T3804, ZX1, ZX3, ZX5, ZX7, ZX9,

GPWP001, W01-T, SP-T3800, GPWP001URTM023- Urevo, **URTM025** FCC

Identifier:2BA8K-S1 We authorize LGAI Technological Center S.A., Ronda de la Font del Ca...

lang:en score:21 filesize: 123.66 K page\_count: 1 document date: 2023-06-07

[pdf] Test Report

Measurement Report Kent Test reports Jiangxi Shuopai Fitness Equipment Co Ltd S1 FITNESS WALKER

2BA8K 2BA8KS1 s1

BSL Testing Co.,LTD. Project No.: BSL2305318275002F Page 1 of 27 FCC PART 15C Measurement and Test ... 01, T3802, T3803, T3804, ZX1, ZX3, ZX5, ZX7, ZX9, GPWP001, W01-T, SP-T3800, GPWP001 URTM023- Urevo, **URTM025**

BSL2305318275002F May 15, 2023 May 15, 2023 May 15, 2023 to June 12, 2023 June 12, 2023 Cind...

lang:tl score:18 filesize: 1.06 M page\_count: 27 document date: 2023-06-13