

[Manuals.plus](#) /

› [Formuler](#) /

› Formuler Z11 Pro Max 4K Android 11 Satellite Receiver with Premium IR1 Remote Control, 4GB RAM, 32GB Storage, Dual Band 5G, Gigabit LAN, Black

Formuler Z11 Pro Max

Formuler Z11 Pro Max User Manual

Model: Z11 Pro Max | Brand: Formuler

1. INTRODUCTION

This user manual provides comprehensive instructions for the setup, operation, and maintenance of your Formuler Z11 Pro Max 4K Android 11 Satellite Receiver. Please read this manual thoroughly before using the device to ensure optimal performance and safety.

Package Contents

Verify that all items listed below are included in your package:

- Formuler Z11 Pro Max Main Unit
- Premium IR1 Remote Control
- HDMI Cable
- Remote Control Extender
- Power Adapter
- Batteries (for remote control)
- Quick Setup Guide



Image 1.1: The Formuler Z11 Pro Max package contents, including the device, remote, and retail box.

2. PRODUCT OVERVIEW

2.1 Formuler Z11 Pro Max Device

The Formuler Z11 Pro Max is a high-performance 4K Android 11 satellite receiver designed for seamless streaming and media consumption. It features 4GB RAM and 32GB storage, dual-band 5G Wi-Fi, and Gigabit LAN for robust connectivity.



Image 2.1: Front view of the Formuler Z11 Pro Max device, showcasing its sleek design.

2.2 Rear Panel Connections

The rear panel of the Formuler Z11 Pro Max provides various ports for connecting to your television, network, and other peripherals.



Image 2.2: Detailed diagram of the rear panel connections, including LAN, HDMI, USB 2.0, IR Recoder, Micro SD Card slot, and Power Adapter port.

- **LAN Port (Gigabit):** For wired network connection.
- **HDMI Port:** Connects to your TV or display for audio and video output.
- **USB 2.0 Port:** For connecting external storage devices or peripherals.
- **IR Recoder Port:** For connecting the included IR remote control extender.

- **Micro SD Card Slot:** For expanding storage capacity.
- **12V/1A Power Input:** Connects to the power adapter.

2.3 Side Panel Connections

The side panel features an additional USB port for convenience.



Image 2.3: Diagram showing the USB 3.0 port located on the side of the device.

- **USB 3.0 Port:** Provides faster data transfer speeds for compatible devices.

2.4 Premium IR1 Remote Control

The included Premium IR1 Remote Control allows you to navigate the device's interface and control playback. Familiarize yourself with its layout and functions.

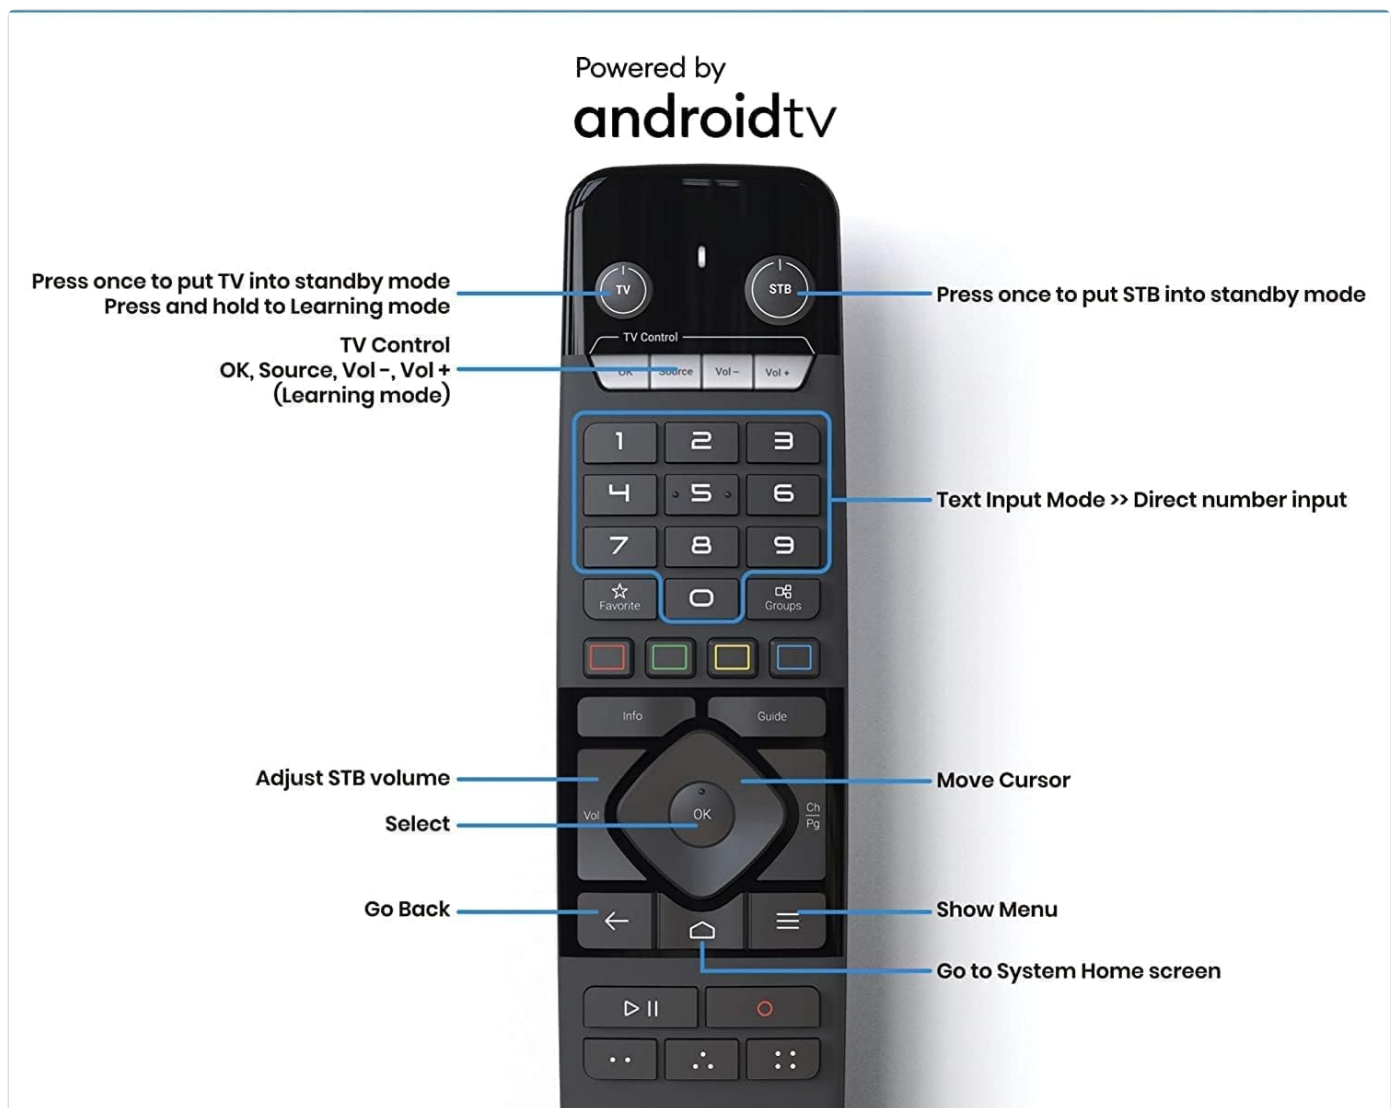


Image 2.4: Layout of the Premium IR1 Remote Control with key functions labeled.

- **TV Control Buttons:** Power, OK, Source, Volume Up/Down (Learning mode compatible).
- **STB Control Button:** Press once to put STB into standby mode.
- **Number Pad:** Direct number input, text input mode.
- **Navigation Pad:** Move Cursor, OK (Select).
- **Volume Buttons:** Adjust STB volume.
- **Back Button:** Go back to the previous screen.
- **Menu Button:** Show Menu.
- **Home Button:** Go to System Home screen.

3. SETUP

3.1 Connecting the Device

1. Connect one end of the HDMI cable to the HDMI port on the Formuler Z11 Pro Max and the other end to an available HDMI input on your television.
2. (Optional) For a wired internet connection, connect an Ethernet cable from your router to the LAN port on the device.
3. Connect the power adapter to the 12V/1A power input on the device, then plug the adapter into a power outlet.
4. Insert the included batteries into the Premium IR1 Remote Control, ensuring correct polarity.
5. Turn on your television and select the correct HDMI input source.

3.2 Initial Power-On and Setup Wizard

Upon first power-on, the device will guide you through an initial setup wizard. Follow the on-screen prompts to configure:

- Language selection
- Network connection (Wi-Fi or Ethernet)
- Google account sign-in (optional, but recommended for app access)
- Date and time settings

4. OPERATING INSTRUCTIONS

4.1 Navigating the Android TV Interface

The Formuler Z11 Pro Max runs on Android 11, providing a user-friendly interface. Use the navigation pad on your remote control to move between icons and select options. The Home button will always return you to the main Android TV screen.

4.2 Installing Applications

You can download and install various applications from the Google Play Store. Navigate to the Play Store icon on your home screen, search for desired apps, and select "Install."

4.3 Using MYTVOnline3

MYTVOnline3 is the pre-installed application for accessing IPTV services. Refer to the Quick Setup Guide or online resources for detailed instructions on configuring your IPTV provider within MYTVOnline3.

5. MAINTENANCE

5.1 Cleaning the Device

To clean the Formuler Z11 Pro Max, disconnect it from the power source. Use a soft, dry, lint-free cloth to wipe the exterior surfaces. Do not use liquid cleaners or abrasive materials.

5.2 Software Updates

Periodically check for software updates to ensure optimal performance and access to new features. Navigate to Settings > About > System Update to check for and install available updates.

6. TROUBLESHOOTING

If you encounter issues with your Formuler Z11 Pro Max, refer to the following common problems and solutions:

Problem	Possible Solution
No power / Device not turning on	• Ensure the power adapter is securely connected to the device and a working power outlet. • Check if the power outlet is functional.
No picture on TV	• Verify the HDMI cable is securely connected to both the device and the TV. • Ensure your TV is set to the correct HDMI input source. • Try a different HDMI cable or TV port.

Problem	Possible Solution
Remote control not responding	• Check and replace the batteries in the remote control. • Ensure there are no obstructions between the remote and the device's IR receiver (or extender).
Network connection issues	• For Wi-Fi, ensure the correct password is entered and the signal is strong. • For wired connection, check the Ethernet cable and router status. • Restart your router and the Formuler device.

7. SPECIFICATIONS

Feature	Detail
Brand	Formuler
Model Number	Z11 Pro Max
Operating System	Android 11
RAM	4GB
Storage	32GB
Connectivity Technology	Ethernet, Dual Band 2x2 Dual Antenna 6th Generation AX wireless (Wi-Fi)
LAN Port	Gigabit (1000M)
USB Ports	2 (1x USB 2.0, 1x USB 3.0)
Color	Black
Item Weight	140 Grams (approx. 4.9 ounces)
Product Dimensions	Approx. 8 x 6 x 2 inches

8. SUPPORT INFORMATION

For further assistance, technical support, or warranty inquiries, please refer to the official Formuler website or contact their customer service. Keep your purchase receipt and product serial number handy when seeking support.

Official Website: www.formuler.tv

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question

and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question