

## zidoo V12

# Zidoo V12 Bluetooth and Infrared Remote Control

User Manual

## INTRODUCTION

---

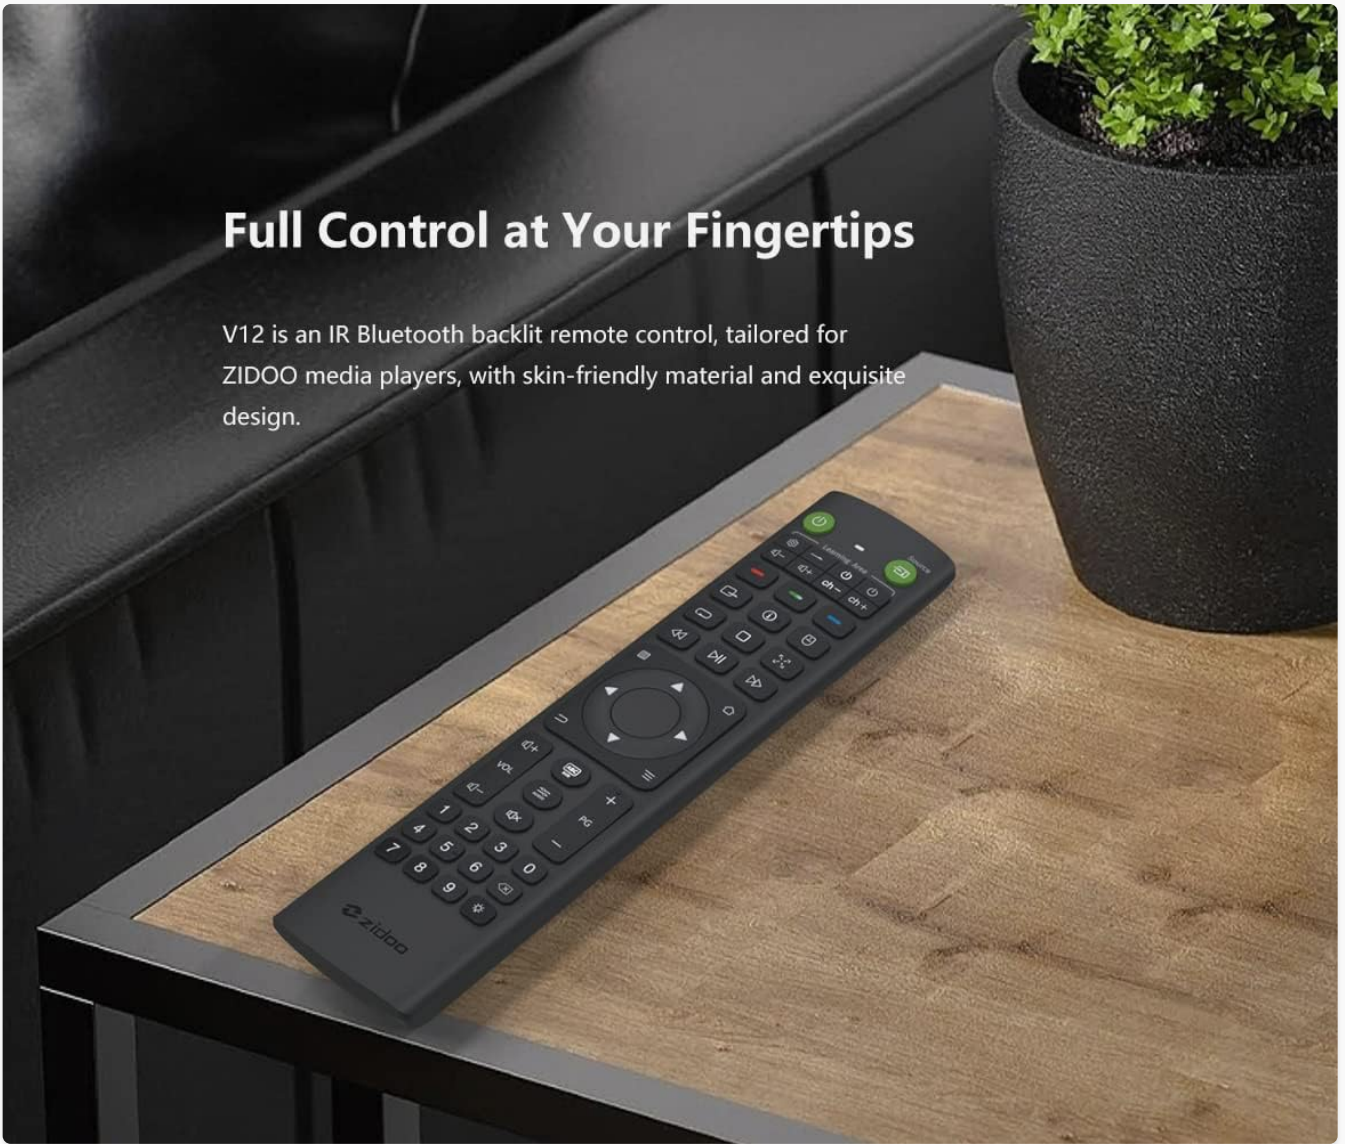
The Zidoo V12 is an advanced Bluetooth and Infrared (IR) remote control designed to provide seamless control over your Zidoo media players. It features a comfortable, skin-friendly design, motion-sensing backlight, and dual-module connectivity for extended range and multi-angle control. The V12 remote is compatible with a wide range of Zidoo models, including Z9S, Z9X, Z10, Z10pro, X20, X20pro, Z1000, Z1000pro, UHD2000, UHD3000, Neo S, and Neo Alpha.



Front and side view of the Zidoo V12 remote control, showcasing its full button layout and ergonomic profile.

## Full Control at Your Fingertips

V12 is an IR Bluetooth backlit remote control, tailored for ZIDOO media players, with skin-friendly material and exquisite design.



The Zidoo V12 remote control resting on a wooden table, highlighting its sleek design and integration into a home environment.

## SETUP

---

### 1. Battery Installation

The Zidoo V12 remote control requires three (3) AAA batteries for operation. Batteries are not included with the product.

1. Locate the battery compartment cover on the back of the remote control.
2. Slide the cover downwards or in the direction indicated by an arrow to open it.
3. Insert three AAA batteries, ensuring the positive (+) and negative (-) terminals align correctly with the markings inside the compartment.
4. Replace the battery compartment cover by sliding it back into place until it clicks securely.

### 2. Initial Power On

Once batteries are installed, the remote is ready for use. Some functions, like Bluetooth pairing, may require specific steps as detailed in the Operating section.

## OPERATING INSTRUCTIONS

---

## Bluetooth Pairing

To pair the Zidoo V12 remote control with your Zidoo media player via Bluetooth:

1. Ensure the remote control is within 30 cm (approximately 12 inches) of your Zidoo media player.
2. Simultaneously press and hold the **OK** key and the **PG** key on the remote control.
3. Continue holding until the indicator light on the remote control begins blinking. This indicates that the remote is in pairing mode.
4. The device should now be paired.

## IR Learning Function

The Zidoo V12 remote can learn infrared (IR) commands from other remote controls, allowing you to consolidate control of multiple devices.

1. Press and hold the **Power** key (usually the green power button) for 3 seconds until the indicator light remains constantly on. This signifies the remote is in learning mode.
2. Press the specific key on the V12 remote that you wish to program. The indicator light will begin to blink.
3. Point the infrared emission window of the V12 remote and the original remote control at each other, ensuring they are closely aligned.
4. Press the corresponding key on the original remote control that you want the V12 to learn.
5. The indicator light on the V12 remote will stop blinking once the learning process for that key is complete.
6. Repeat steps 2-5 for any other keys you wish to program.
7. To exit the learning mode, press the **Power** key again.



## Backlight Control

The Zidoo V12 features a motion-sensing backlight for improved visibility in dark environments.



- To manually turn the backlight on or off, press and hold the **Backlight** key (often represented by a light bulb or star icon) for 3 seconds.




#### Learning method

1. Press  key for 3 sec until indicator light is always on.
2. Press the key to be learnt, then the indicator light will blink.
3. Point infrared emission window of these two remote controls at each other and press the key that will learn to the other remote control. Indicator light stops blinking after learning is finished. Learn others keys by the analogy, press  key to exit the learning mode.

#### Bluetooth Pairing

Point the remote control at the device within 30 cm, press  and PG  keys at the same time till indicator light blinking to finish pairing.

#### Backlit

Press  key for 3 sec to turn on/off backlit.

Detailed instructions for IR learning, Bluetooth pairing, and backlight control as depicted on the product's instructional diagram.

# Easy Pairing and Using

Easy pairing with ZIDOO media players, load the batteries and play.



A user holding the Zidoo V12 remote control, demonstrating its ease of use with a Zidoo media player interface on a television screen.

## Backlit Design

Motion-sensing backlit design, convenient in the darkness.



The Zidoo V12 remote control showcasing its illuminated backlit buttons, designed for convenient use in low-light conditions.

## High Sensitivity

IR and Bluetooth dual modules, control with long distance and multi-angle.





A user operating the Zidoo V12 remote control in a living room, illustrating its high sensitivity and effective control from various angles.



A visual representation of the Zidoo V12 remote control's simple learning capability, allowing it to acquire commands from other IR remotes.

## MAINTENANCE

---

### Cleaning

To maintain the remote control's appearance and functionality:

- Wipe the surface with a soft, dry cloth.
- For stubborn dirt, slightly dampen the cloth with water or a mild, non-abrasive cleaner. Do not use harsh chemicals or abrasive materials.
- Avoid getting liquid into the remote's internal components.

### Battery Replacement

Replace batteries when the remote's response becomes sluggish or it stops functioning. Always replace all three AAA batteries at the same time with new ones. Do not mix old and new batteries, or different types of batteries.

### Storage

If the remote control will not be used for an extended period, remove the batteries to prevent leakage and potential damage to the remote.

## TROUBLESHOOTING

---



Problem	Possible Cause	Solution
Remote not responding	Dead or low batteries; Incorrect battery installation; Remote out of range; Obstruction between remote and device; Bluetooth not paired (for Bluetooth functions).	Replace batteries; Check battery polarity; Move closer to the device; Remove obstructions; Re-pair Bluetooth (see Operating section).
Bluetooth pairing fails	Remote too far from device; Interference; Incorrect pairing procedure.	Ensure remote is within 30 cm of the device; Minimize interference from other wireless devices; Follow Bluetooth pairing steps precisely (see Operating section).
IR learning not working	Incorrect learning procedure; Remotes not aligned; Weak signal from original remote.	Ensure correct IR learning steps are followed; Align IR windows closely; Ensure original remote has fresh batteries.
Backlight not illuminating	Backlight feature is off; Low batteries.	Press and hold the Backlight key for 3 seconds to activate; Replace batteries.

## SPECIFICATIONS

Feature	Detail
Model Name	V12
Manufacturer	zidoo
Product Dimensions (L x W x H)	7.95 x 1.77 x 0.79 inches (20.19 x 4.50 x 2.01 cm)
Item Weight	3.84 ounces (108.87 grams)
Connectivity	Bluetooth, Infrared (IR)
Power Source	3 x AAA Batteries (not included)
Special Features	Backlit buttons, Motion-sensing, IR learning function
Compatible Zidoo Models	Z9S, Z9X, Z10, Z10pro, X20, X20pro, Z1000, Z1000pro, UHD2000, UHD3000, Neo S, Neo Alpha







## WARRANTY AND SUPPORT

For information regarding product warranty, please refer to the documentation provided at the time of purchase or contact the seller directly. Zidoo products typically come with a manufacturer's warranty, details of which can be found on the official Zidoo website or by contacting their customer support.

For technical support or further assistance, please contact the seller from whom you purchased the Zidoo V12 remote

control or visit the official Zidoo support channels.

Related Documents - V12

	<p><a href="#">Zidoo Media Player BT Download Guide</a></p> <p>A guide on how to set up and use the tTorrent application on Zidoo RTD1619DR series media players (Z9X, Z10pro, Z1000Pro) for BT downloads, including mobile control via Transdrone.</p>
	<p><a href="#">Zidoo Firmware Update v6.3.30 for Z9X, Z10 PRO, Z1000 PRO, UHD3000</a></p> <p>Official firmware update release notes and download information for Zidoo media players (Z9X, Z10 PRO, Z1000 PRO, UHD3000) including version v6.3.30 and v6.3.30G. Details USB update procedures and change logs.</p>
	<p><a href="#">Porównanie Odtwarzaczy Multimedialnych Zidoo: Modele i Specyfikacje</a></p> <p>Przewodnik porównujący zaawansowane odtwarzacze multimedialne marki Zidoo. Dokument zawiera szczegółowe dane techniczne, takie jak procesor, GPU, pamięć, łączność, dekodowanie wideo i audio, aby pomóc w wyborze idealnego urządzenia.</p>
	<p><a href="#">Zidoo Z9X and Z10Pro UI Customization Guide</a></p> <p>Learn how to customize the user interface (UI) of your Zidoo Z9X and Z10Pro media players, including adding and arranging applications on the main screen and bottom bar.</p>
	<p><a href="#">Zidoo Media Players Tutorials and Guides</a></p> <p>Comprehensive list of tutorials, guides, and setup instructions for Zidoo media players, covering general settings, configuration, customization, and flashing procedures. Find setup instructions, troubleshooting tips, and advanced feature guides for Zidoo devices.</p>
	<p><a href="#">Zidoo UHD3000 4K Hi-Fi Media Player User Manual</a></p> <p>This document provides a comprehensive overview of the Zidoo UHD3000 4K Hi-Fi Media Player, covering its hardware interface, performance parameters, remote control functions, connection methods, audio settings, and system initialization and updates.</p>

