

[Manuals.plus](#) /

› [Tronsmart](#) /

› Tronsmart Halo 100 Portable Party Bluetooth Speaker User Manual

Tronsmart Halo 100

Tronsmart Halo 100 Portable Party Bluetooth Speaker User Manual

Model: Halo 100

PRODUCT OVERVIEW

The Tronsmart Halo 100 is a portable party Bluetooth speaker designed to deliver powerful sound and vibrant light shows for various outdoor and indoor activities. It features a 3-way sound system, IPX6 waterproof rating, extended playtime, and customizable EQ settings via the Tronsmart app.

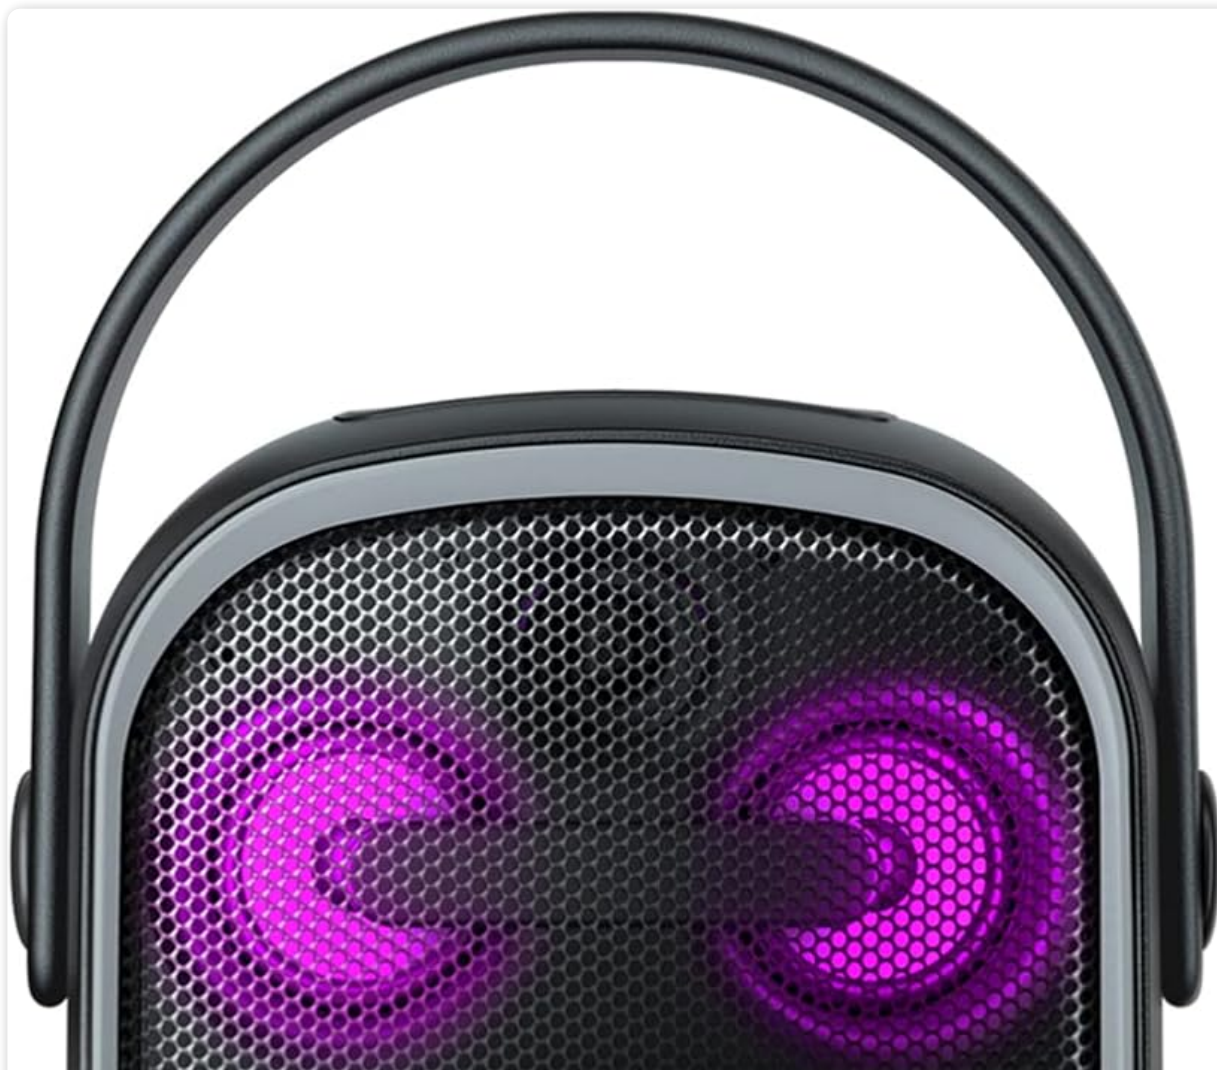




Image: Front view of the Tronsmart Halo 100 speaker showcasing its integrated light show.

Your browser does not support the video tag.

Video: A brief overview of the Tronsmart Halo 100 Portable Bluetooth Speaker highlighting its key features.

PACKAGE CONTENTS

- 1 x Halo 100 Portable Party Speaker
- 1 x Aux-in Cable
- 1 x Type-C Cable
- 1 x User Manual
- 1 x Warranty Card

KEY FEATURES

- **3-Way HiFi Audio System Technology:** Features DSP tuning for booming bass and crisp treble, creating an immersive sound experience.
- **Light Show and EQ Mode:** Offers 5 different light models and 7 colors to enhance party ambiance. The EQ mode allows for fine-tuning of mid-bass and treble.
- **Bluetooth 5.3 and Super Wireless Stereo:** Ensures clear and stable music playback with faster data transmission.

Connect two speakers for a true wireless stereo surround sound experience.

- **Durable, Portable & IPX6 Waterproof:** Designed for rugged outdoor use with an IPX6 waterproof rating and a built-in handle for easy portability.
- **12000mAh Battery & 18H Playtime:** Provides up to 18 hours of continuous music playback and can also function as a power bank for other USB devices.



3 WAY SOUND SYSTEM

1 woofer delivers
enhanced bass

**2 mid tweeters
& 1 tweeter**
present clear treble
in extraordinary clarity

Image: Exploded view illustrating the 3-way sound system components, including woofer, mid-tweeters, and tweeter.

TRUE WIRELESS SURROUND PAIRING

Pair 2 Speakers
to Deliver Extraordinary Stereo Sound



Image: Depiction of two Halo 100 speakers wirelessly paired for stereo sound, with a range of up to 49 feet.

PERSONALIZE AUDIO EFFECTS

LIGHT SHOW VIA TRONSMART APP

Tailor for Audio Equalizers



Image: The speaker showcasing its splendid light show with five distinct lighting modes.

SPLENDID LIGHT SHOW

5 LIGHTING MODES



Image: Visual representation of the speaker's 18-hour extended playtime, suitable for long events.

SETUP GUIDE

1. Charging the Speaker

Before first use, fully charge the Halo 100 speaker. Connect the provided Type-C cable to the speaker's charging port and a compatible USB power adapter (not included). A full charge takes approximately 5.5 hours. The battery indicator lights

will show charging status.



Image: Rear view of the speaker showing the USB, AUX, and TF card input ports.

2. Power On/Off

- To power on, press and hold the Power Button () for 2 seconds.
- To power off, press and hold the Power Button () for 2 seconds again.

3. Bluetooth Pairing

1. Turn on the Halo 100 speaker. It will automatically enter Bluetooth pairing mode, indicated by a flashing blue LED.
2. Enable Bluetooth on your device (smartphone, tablet, etc.).
3. Search for 'Tronsmart Halo 100' in your device's Bluetooth list and select it to connect.
4. Once connected, the blue LED will remain solid.

4. True Wireless Stereo (TWS) Pairing

For an enhanced stereo experience, you can pair two Halo 100 speakers together.

1. Ensure both Halo 100 speakers are powered on and not connected to any other Bluetooth device.
2. On one speaker (this will be the primary speaker), press the Stereo Pairing Button (). The indicator will flash white.
3. The two speakers will automatically connect to each other. Once paired, the indicator on the primary speaker will remain solid white, and the secondary speaker's indicator will turn off.
4. Now, connect your device to the primary speaker via Bluetooth as described in step 3.

OPERATING INSTRUCTIONS

1. Button Functions

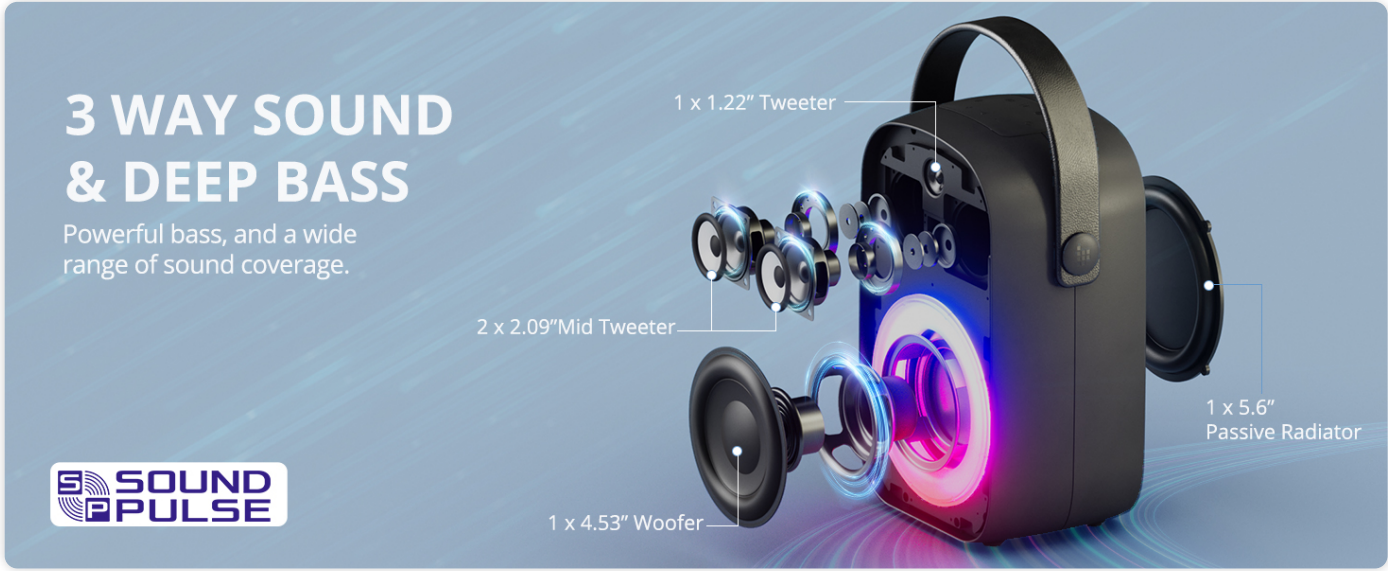


Image: Detailed view of the speaker's control panel and button layout.

Button	Function
Power Button ()	Press and hold for 2 seconds to Power On/Off.
Volume Down (-)	Press to decrease volume. Press and hold for 2 seconds for previous track.
Play/Pause Button (▶/)	Press to Play/Pause music. Press once to Answer/End a phone call. Press and hold for 2 seconds to reject a call. Double press to activate voice assistant.
Volume Up (+)	Press to increase volume. Press and hold for 2 seconds for next track.
Mode Button (M)	Press to switch between Bluetooth, Aux-in, USB, and Micro SD modes.
Stereo Pairing Button ()	Press to initiate True Wireless Stereo pairing.
Light Switch (✱)	Press to cycle through light modes or turn lights off.
SoundPulse EQ Button (⚙️)	Press to activate SoundPulse EQ mode for enhanced audio.

2. Light Modes

The Halo 100 features 5 different light modes and 7 colors. Press the Light Switch button to cycle through the available light effects or to turn the lights off.

3. Tronsmart App Control

Download the Tronsmart app from your device's app store to unlock full customization options, including:

- Customizable EQ settings to tailor the sound to your preference.
- Control over light show modes and colors.
- Firmware updates and other advanced settings.

EXTENDED PLAYTIME



*Varied by light display, volume levels & audio contents

Image: The Tronsmart app interface on a smartphone, demonstrating customizable EQ and light show controls.

Your browser does not support the video tag.

Video: Demonstrates the operations and functions available within the Tronsmart App for the Halo 100 speaker.

Your browser does not support the video tag.

Video: A comprehensive guide on how to operate the Tronsmart Halo 100 speaker, covering various functions.

4. Answering Phone Calls

When connected via Bluetooth, the speaker can be used for hands-free calls:

- Press the Play/Pause button once to answer an incoming call.
- Press the Play/Pause button once again to end an active call.
- Press and hold the Play/Pause button for 2 seconds to reject an incoming call.

MAINTENANCE

- **Cleaning:** Wipe the speaker with a soft, damp cloth. Do not use harsh chemicals or abrasive cleaners.
- **Water Resistance:** The speaker is IPX6 waterproof, meaning it can withstand powerful water jets. Do not submerge the speaker in water. Ensure the charging port cover is securely closed before exposure to water.
- **Storage:** Store the speaker in a cool, dry place away from extreme temperatures and direct sunlight.
- **Battery Care:** To prolong battery life, fully charge the speaker at least once every three months if not in regular use. Avoid completely draining the battery frequently.

TROUBLESHOOTING

Problem	Solution
Speaker does not power on.	Ensure the battery is charged. Connect the speaker to a power source using the Type-C cable.
Cannot pair with Bluetooth device.	• Ensure the speaker is in pairing mode (flashing blue LED). • Make sure Bluetooth is enabled on your device and it's within 49 feet (15 meters) of the speaker. • Forget 'Tronsmart Halo 100' from your device's Bluetooth list and try pairing again. • If multiple Bluetooth devices are nearby, turn them off to avoid interference.
No sound or low volume.	• Increase the volume on both the speaker and your connected device. • Ensure the speaker is correctly connected via Bluetooth or Aux-in. • Check if the audio source is playing.
TWS pairing failed.	• Ensure both speakers are Halo 100 models and are not connected to any other Bluetooth device. • Place speakers close to each other during pairing. • Repeat the TWS pairing steps carefully.
Light show not working.	Press the Light Switch button to activate or cycle through light modes. Check battery level.

SPECIFICATIONS

Feature	Detail
Model Name	Halo 100
Brand	Tronsmart
Speaker Type	1x Woofer, 1x Tweeter, 2x Mid Tweeters

Feature	Detail
Speaker Maximum Output Power	60 Watts
Connectivity Technology	Bluetooth, Aux-in, USB, Micro SD
Wireless Communication Technology	Bluetooth 5.3
Maximum Range	49 Feet (15 meters)
Battery Capacity	12000 Milliamp Hours
Battery Life	18 Hours
Charging Time	5.5 Hours
Is Waterproof	Yes (IPX6 Rated)
Product Dimensions	7.8"D x 5.9"W x 11.3"H
Item Weight	6 Pounds
Input Voltage	5 Volts (DC)
Controller Type	Button Control, App Control
Color	Black
Warranty Type	1 Year Warranty

WARRANTY AND SUPPORT

The Tronsmart Halo 100 Portable Party Bluetooth Speaker comes with a **1 Year Warranty** from the date of purchase. This warranty covers manufacturing defects and workmanship under normal use. For technical support, warranty claims, or any inquiries regarding your product, please contact Tronsmart customer service through their official website or the contact information provided on your warranty card. You can also visit the official Tronsmart store for more information:[Tronsmart Store](#)

© 2024 Tronsmart. All rights reserved. Specifications are subject to change without notice.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page’s manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for

conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question