Herdio 6.5" Outdoor Bluetooth Speakers

Herdio 6.5 inch 800W Outdoor Bluetooth Speakers User Manual

Model: 6.5" Outdoor Bluetooth Speakers

Introduction

Thank you for choosing the Herdio 6.5 inch 800W Outdoor Bluetooth Speakers. This system is designed to provide high-quality audio for both indoor and outdoor environments, featuring powerful bass, clear stereo sound, and robust weather resistance. This manual provides essential information for setup, operation, maintenance, and troubleshooting to ensure optimal performance and longevity of your speaker system.



Image: Herdio 6.5 inch 800W Outdoor Bluetooth Speakers with the included amplifier, showcasing the complete system.

What's in the Box

Before you begin, please verify that all components are present in your package:

- 2 or 4 x Herdio 6.5 inch Outdoor Bluetooth Speakers (depending on package)
- 1 x Multifunctional Amplifier

- 1 x Power Adapter
- Speaker Cables
- Mounting Brackets and Hardware
- User Manual

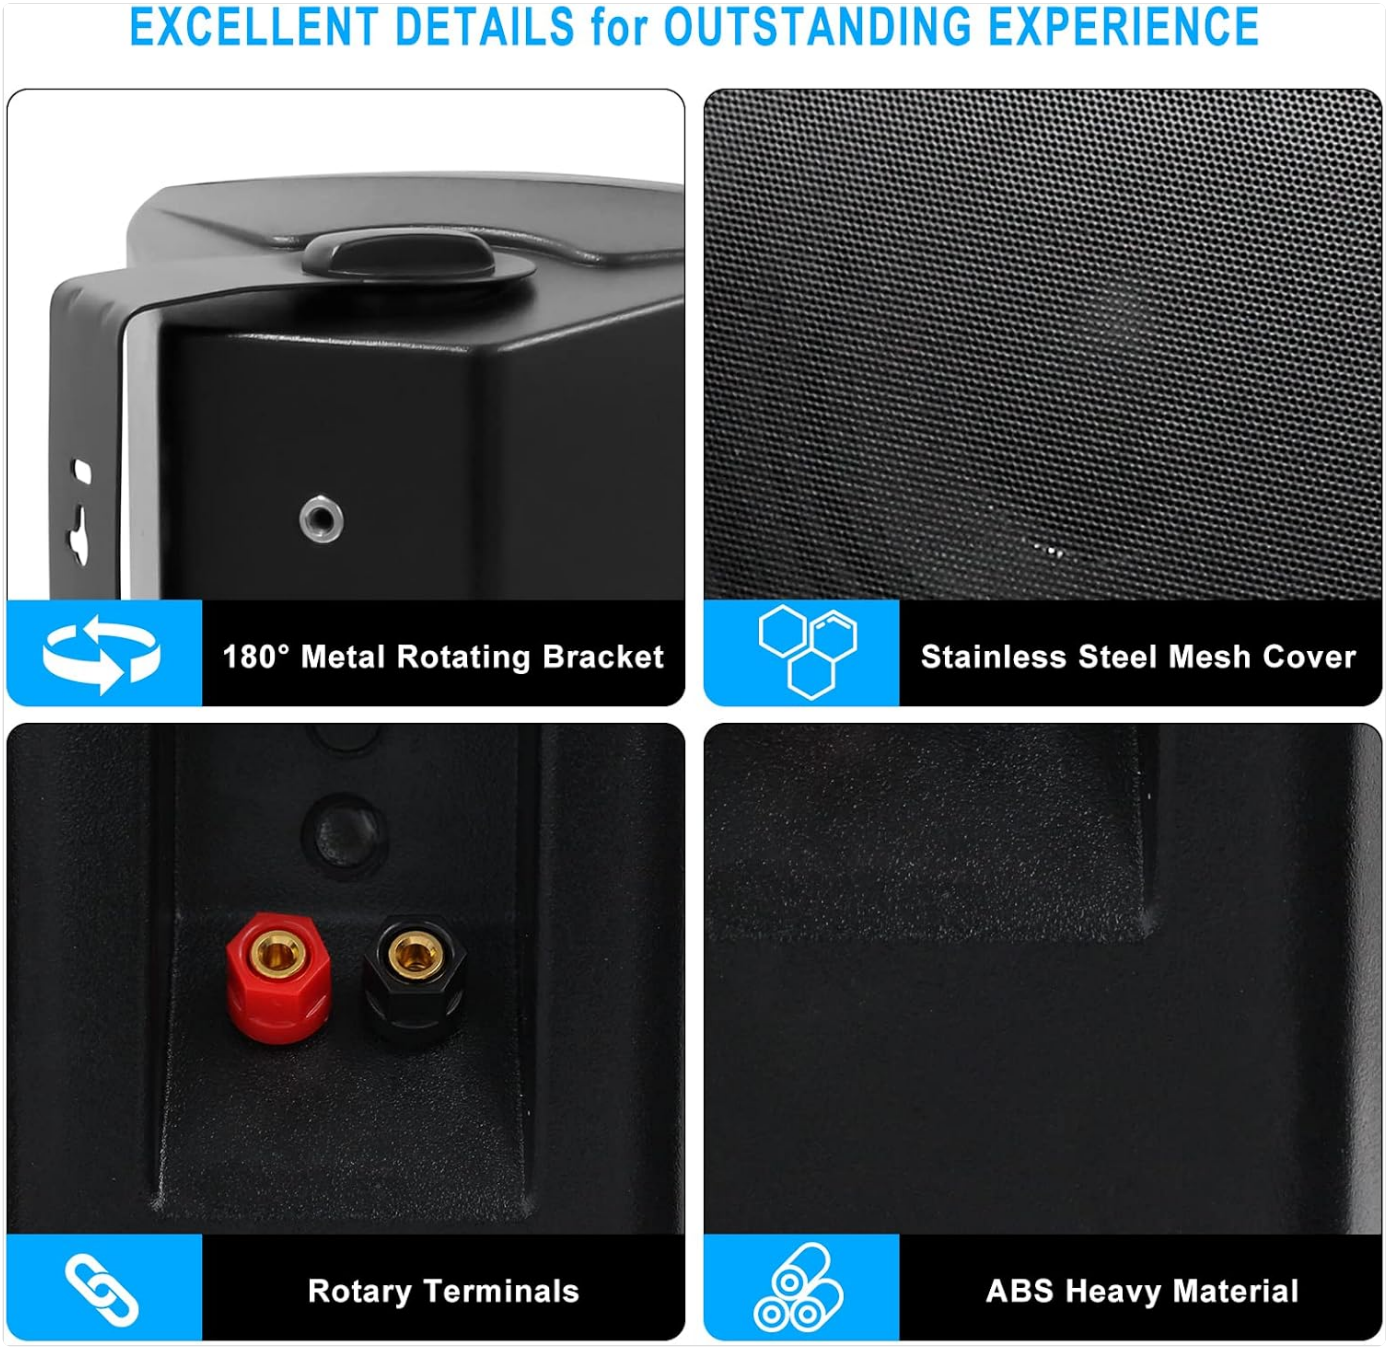


Image: A visual representation of all items included in the Herdio speaker system package, laid out on a patio setting.

Setup and Installation

Follow these steps to properly set up and install your Herdio outdoor speaker system.

1. Mounting the Speakers

The speakers come with versatile speed-lock swivel brackets for easy installation and optimal sound direction. These brackets allow for up to a 180° range of motion.

1. Choose a suitable location for each speaker, ensuring it is secure and provides the desired sound coverage.
2. Attach the mounting bracket to the wall or desired surface using appropriate screws and anchors (not included,

ensure they are suitable for your surface type).

3. Secure the speaker to the bracket. The speed-lock design allows for quick and secure attachment.
4. Adjust the speaker angle to direct sound as needed.



Image: Detailed view of the speaker's 180° metal rotating bracket, stainless steel mesh cover, rotary terminals, and ABS heavy material construction.

2. Connecting the Speakers to the Amplifier

The system includes an independent amplifier to power the passive speakers. Ensure the amplifier is placed in a dry, protected area, even if the speakers are outdoors.

1. Connect the speaker cables from each passive speaker to the corresponding speaker terminals on the amplifier. Pay attention to positive (+) and negative (-) terminals for correct polarity.
2. Connect the power adapter to the amplifier's PWR input and then plug it into a standard electrical outlet.



Image: A clear diagram illustrating the connection process of four passive speakers to the central amplifier and its power adapter.

Operating Instructions

Learn how to operate your Herdio speaker system and utilize its various functions.

Amplifier Controls and Interfaces



Warranty: 1 Year	Bluetooth Version: 5.0
Wireless Distance: 65ft+	Speaker Unit: 6.5" x1, 2.3" x1
MAX Power Outputs: 200W	Frequency Response: 75HZ-20KHZ
Sensitivity: 89dB	Weight: 3.2kg

Image: An overhead view of the Herdio amplifier, labeling its various buttons and input/output ports with corresponding numbers.

1. **Power** / **Play**/**Pause Button:** Long press to power On/Off. Short press to play/pause audio.
2. **Mode Button:** Long press to restore factory settings. Short press to switch between Bluetooth (BT), USB, AUX, and MIC input modes.
3. **Volume Down** / **TWS Button:** Press briefly to decrease the volume. Press and hold to open/turn off TWS (True Wireless Stereo) mode.
4. **Volume Up** / **Mono Button:** Press briefly to increase the volume. Long press to switch between stereo and mono sound.
5. **Previous Track** / **Rewind Button:** Press and hold to rewind. Short press for the previous song.
6. **Next Track** / **Fast Forward Button:** Long press to fast forward. Short press for the next song.
7. **MIC Interface:** 3.5mm input for microphone connection.
8. **AUX Interface:** 3.5mm input for auxiliary audio devices.
9. **USB Interface:** USB port for media playback.
10. **PWR Interface:** Power input port for the power adapter.

Bluetooth Pairing

To connect your device via Bluetooth:

1. Ensure the amplifier is powered on.
2. Press the "Mode" button until the Bluetooth indicator light is blinking, indicating pairing mode.
3. On your smartphone or Bluetooth-enabled device, search for "Herdio" or a similar device name in the Bluetooth settings.
4. Select the device to pair. Once connected, the Bluetooth indicator light will become solid.

Using Other Input Modes

- **AUX Input:** Connect your audio device (e.g., smartphone, MP3 player) to the AUX interface (8) using a 3.5mm audio cable. Press the "Mode" button to select AUX input.
- **USB Input:** Insert a USB drive with audio files into the USB interface (9). Press the "Mode" button to select USB input.
- **MIC Input:** Connect a microphone to the MIC interface (7) for announcements or karaoke.

Maintenance

Proper maintenance ensures the longevity and optimal performance of your Herdio outdoor speakers.

- **Cleaning:** Use a soft, damp cloth to wipe down the speaker cabinets. Avoid harsh chemicals or abrasive cleaners. Ensure the speakers are dry before prolonged exposure to elements.
- **Weather Resistance:** The speakers are designed with marine-grade waterproof and weatherproof protection (IPX6 rated) and UV protection. They can withstand extreme hot/cold temperatures. However, for prolonged periods of non-use or during severe weather conditions, it is recommended to cover or store the speakers if possible to maximize their lifespan.
- **Cable Inspection:** Periodically check all cables for any signs of wear, fraying, or damage. Replace damaged cables immediately to prevent electrical hazards or performance issues.

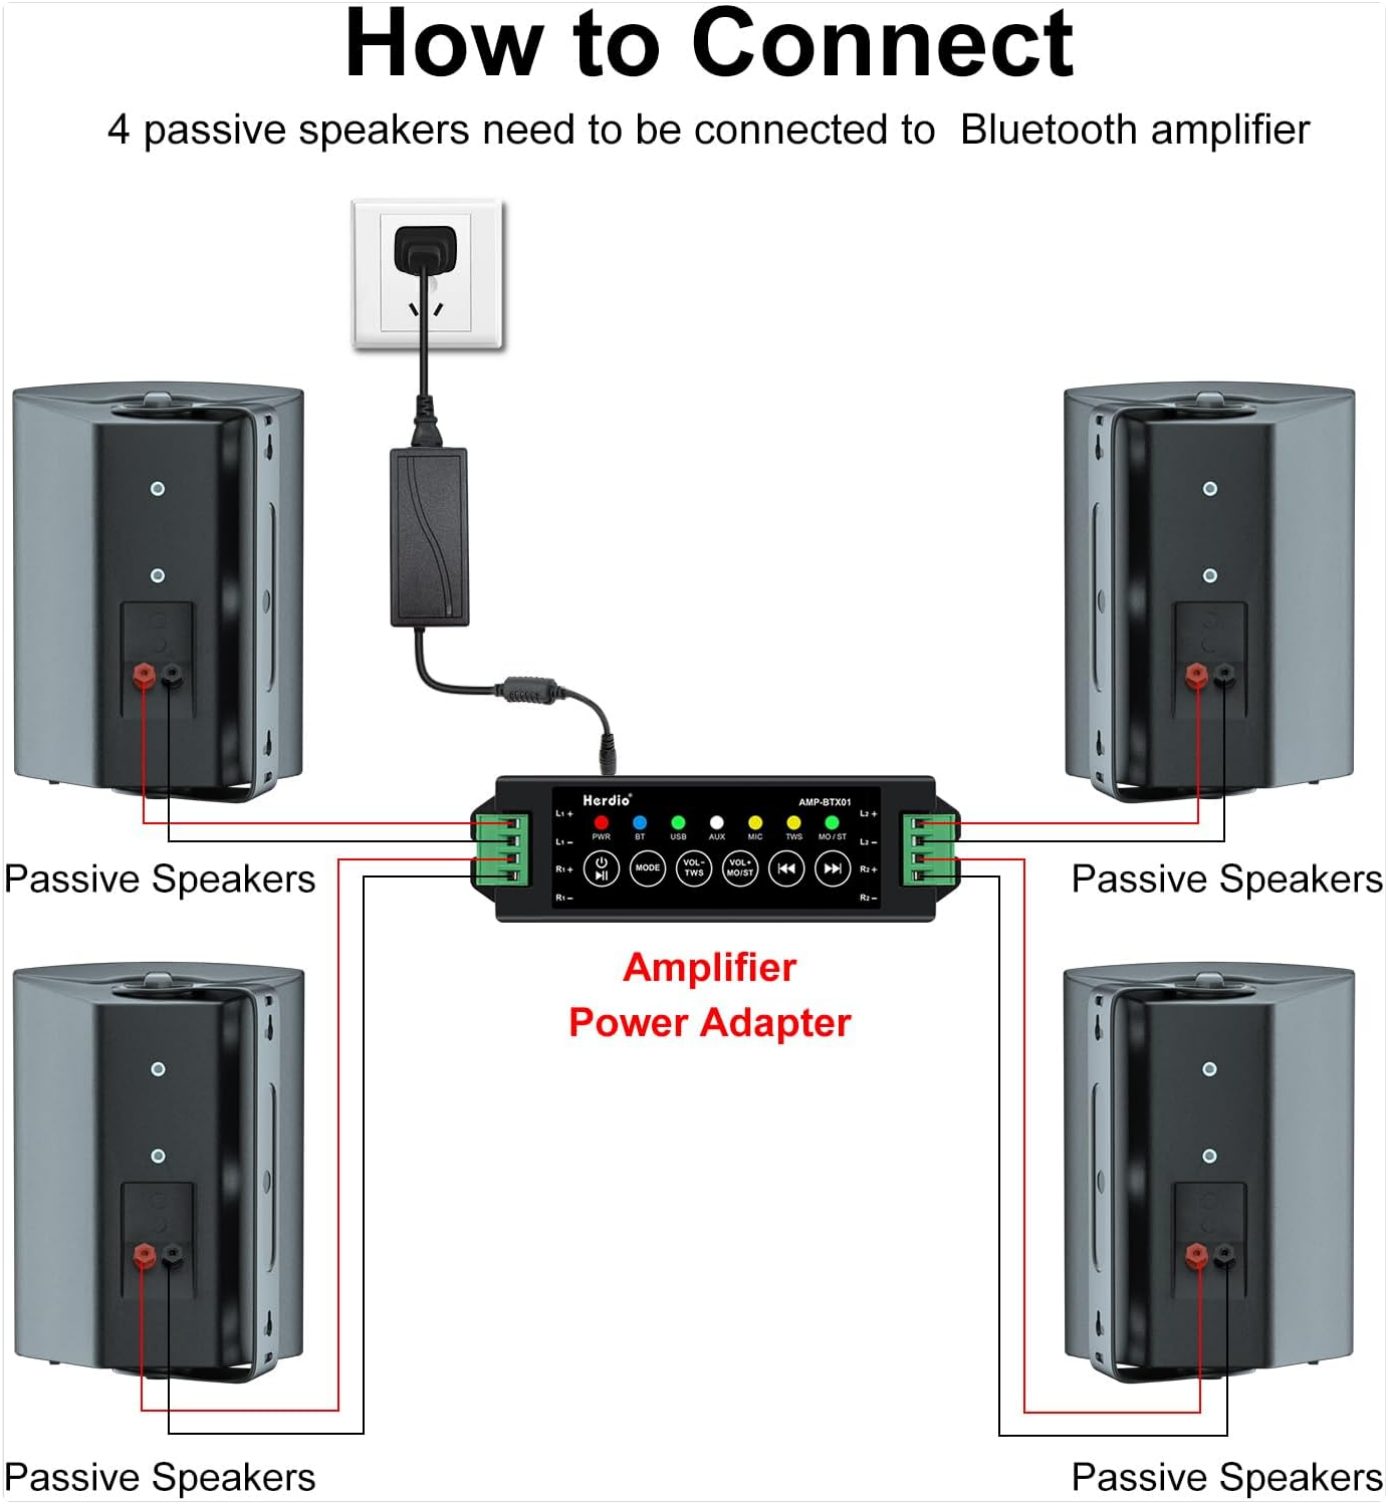


Image: A Herdio speaker shown near a pool with water splashing, highlighting its marine-grade waterproof construction and all-weather resistant coating.



Image: A Herdio speaker placed on a frozen, icy surface with snow-covered mountains in the background, illustrating its robust ABS engineering material and paint that can cope with extreme heat/cold environments.

Troubleshooting

If you encounter issues with your Herdio speaker system, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
No Sound	Power not connected. Incorrect input mode selected. Volume too low. Speaker cables loose or incorrectly connected.	Ensure amplifier is plugged in and powered on. Press the "Mode" button to cycle through inputs (BT, USB, AUX, MIC). Increase volume on both the amplifier and your source device. Check all speaker cable connections at both the amplifier and speakers.

Problem	Possible Cause	Solution
Bluetooth Disconnection / Cannot Pair	Device too far from amplifier. Interference from other devices. Amplifier not in pairing mode.	Move your device closer to the amplifier. Turn off other Bluetooth devices nearby. Ensure the amplifier's Bluetooth indicator is blinking. Try forgetting the device on your phone and re-pairing.
Distorted Sound	Volume too high. Poor audio source quality. Damaged speaker or cable.	Reduce the volume. Try a different audio source or file. Inspect speakers and cables for visible damage. Contact support if issues persist.

Specifications

Detailed technical specifications for the Herdio 6.5 inch Outdoor Bluetooth Speakers:

Feature	Detail
Model Name	6.5" Outdoor Bluetooth Speakers
Peak Power Output	800W (200W per speaker, 200W*4)
Speaker Unit	6.5" Woofer, 2.3" Dome Tweeter
Frequency Response	75Hz - 20KHz
Sensitivity	89dB
Bluetooth Version	5.0
Wireless Distance	65ft+
Connectivity Technology	Bluetooth, Auxiliary (3.5mm), USB
Material	ABS Heavy Industrial Polymer
Waterproof Rating	IPX6 Marine Grade Waterproof
Mounting Type	Wall Mount (Speed-lock Swivel Bracket)
Product Dimensions (each speaker)	19.5D x 21.5W x 29.5H Centimetres (approx. 7.68"D x 8.46"W x 11.61"H)
Item Weight (total)	12.09 Kilograms
Input Voltage	12 Volts
Audio Output Mode	Stereo
Surround Sound Channel Configuration	4.0

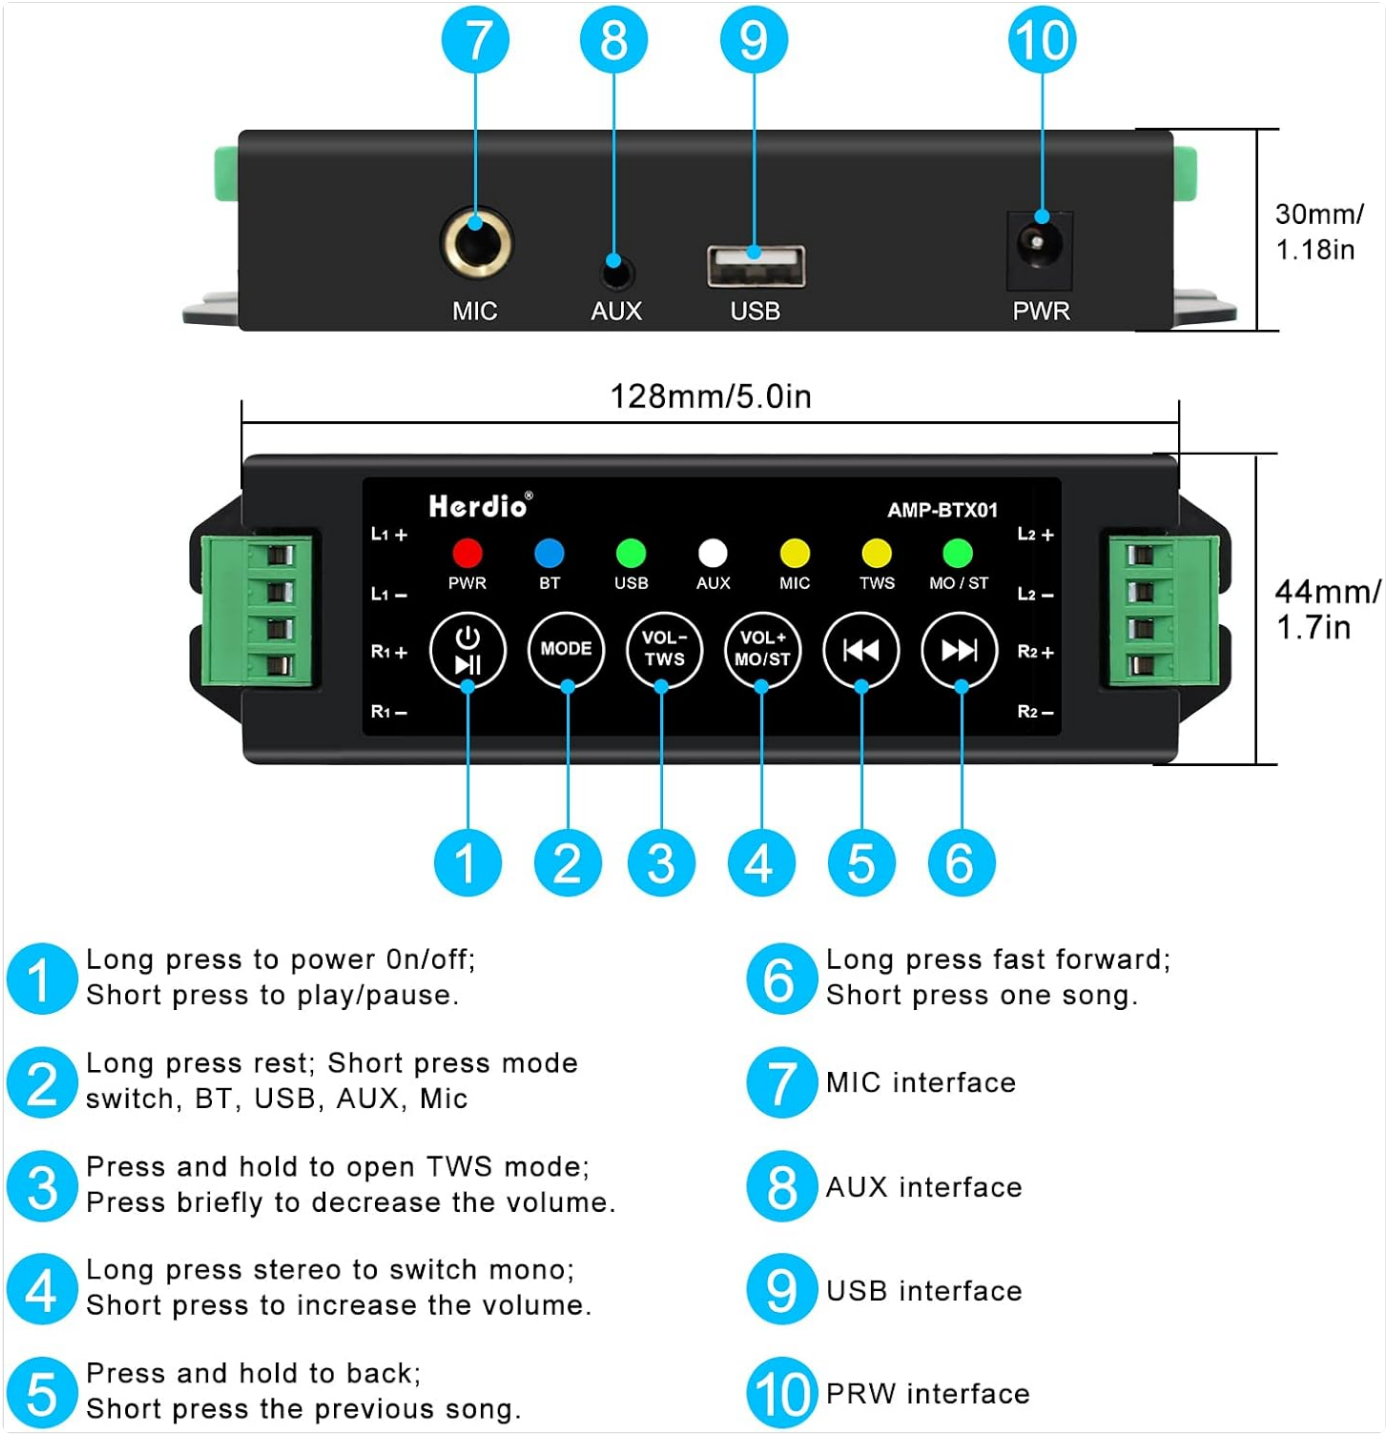


Image: A visual representation of the speaker's dimensions alongside a table summarizing key specifications like warranty, wireless distance, max power output, Bluetooth version, speaker unit size, frequency response, and weight.

Warranty and Support

Herdio stands behind the quality of its products. Your Herdio Outdoor Bluetooth Speaker system comes with a**1-Year Warranty** from the date of purchase.

For technical questions, troubleshooting assistance, or any other inquiries, please contact Herdio customer service. We are committed to providing premium customer service within 24 hours.

Please refer to your purchase documentation or the Herdio official website for the most up-to-date contact information.

© 2023 Herdio. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question