## eufy T2261

# eufy RoboVac X8 Hybrid User Manual

Model: T2261

## Introduction

This manual provides essential information for the safe operation, maintenance, and troubleshooting of your eufy RoboVac X8 Hybrid. Please read this manual thoroughly before using the product and retain it for future reference. The eufy RoboVac X8 Hybrid is a robotic vacuum and mop cleaner designed to efficiently clean various floor types, featuring iPath Laser Navigation for intelligent mapping and Twin-Turbine Technology for enhanced suction.




Image: eufy RoboVac X8 Hybrid, a white robotic vacuum cleaner with gold accents, shown alongside its charging dock and a smartphone displaying its mapping application.

## What's in the Box

The standard package for the eufy RoboVac X8 Hybrid typically includes the following components:

- eufy RoboVac X8 Hybrid Unit
- Charging Base
- Power Adapter
- Water Tank and Mop Cloth
- Side Brushes (pair)
- Additional Filter
- Cleaning Tool
- User Manual and Quick Start Guide
- Brush (main rolling brush)

## Setup

## 1. Preparing the RoboVac

- Remove all protective films and stickers from the RoboVac and charging base.
- Install the side brushes by pressing them onto the square posts until they click into place.
- Ensure the dust collector and water tank are properly installed.

## 2. Positioning the Charging Base

- Place the charging base on a hard, level surface against a wall.
- Ensure there is at least 3 feet (1 meter) of clear space to the front and 1 foot (0.5 meters) to each side of the charging base.
- Connect the power adapter to the charging base and plug it into a wall outlet.

## 3. Initial Charge

Place the RoboVac on the charging base, ensuring the charging pins align. For first-time use, fully charge the RoboVac before operation. The indicator lights will show charging status.

## 4. App Connection (Optional but Recommended)

Download the eufyHome app from the App Store or Google Play. Follow the in-app instructions to connect your RoboVac to your Wi-Fi network. This enables advanced features like mapping, scheduling, and remote control.

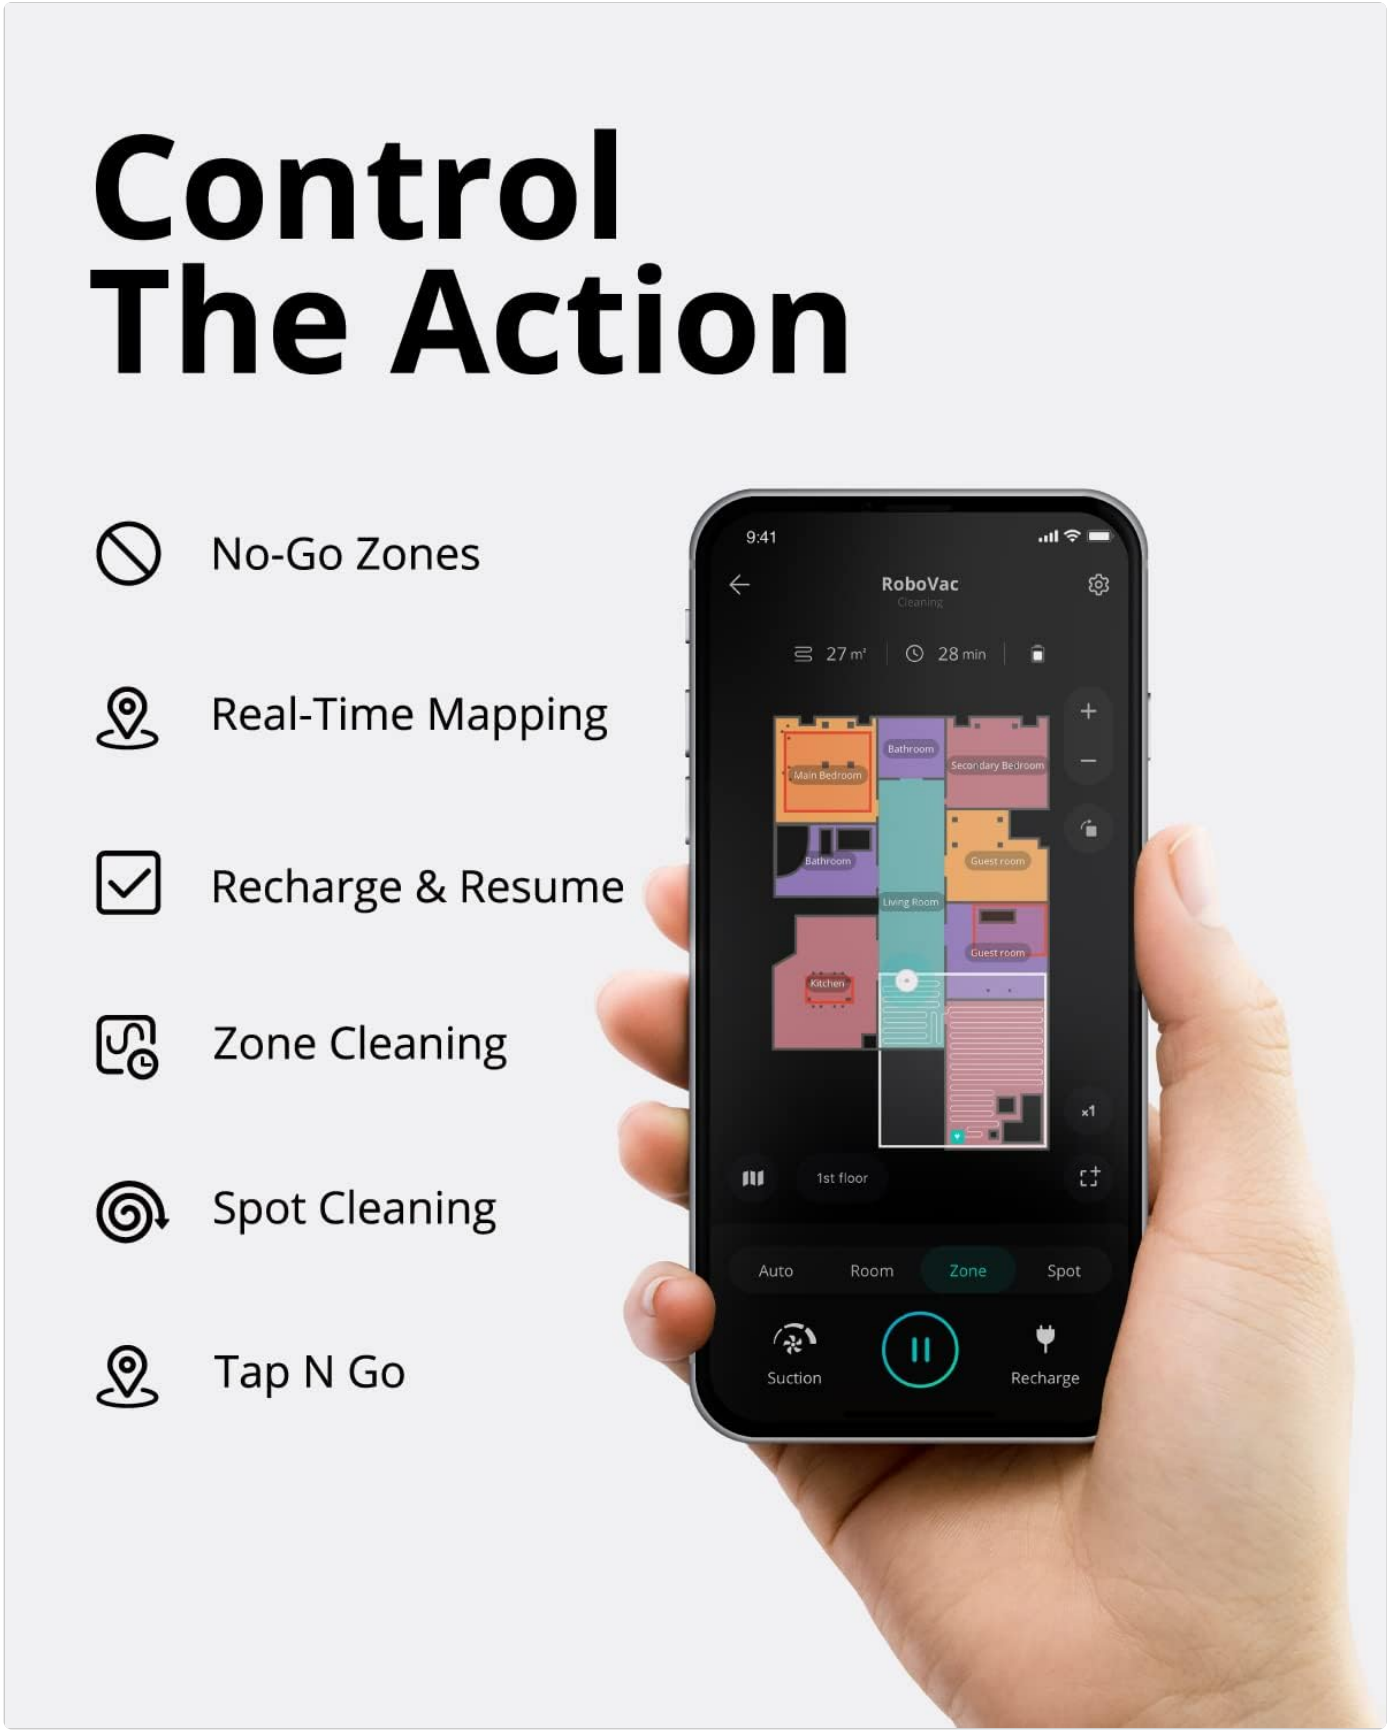



Image: The eufyHome app interface on a smartphone, demonstrating control options such as no-go zones, real-time mapping, recharge & resume, zone cleaning, spot cleaning, and tap-n-go.

## Operating the RoboVac

### Cleaning Modes

- **Auto Clean:** The RoboVac automatically cleans your home using iPath Laser Navigation.

- **Spot Clean:** Cleans a specific area with concentrated suction.
- **Zone Clean:** Define specific zones in the app for the RoboVac to clean.
- **Targeted Spot Cleaning:** Send the RoboVac to a specific point on the map via the app.

### Vacuuming and Mopping

The RoboVac X8 Hybrid features 2-in-1 vacuum and mop functionality. To use the mopping feature, fill the water tank and attach the mop cloth. The RoboVac will simultaneously vacuum and mop hard floors.

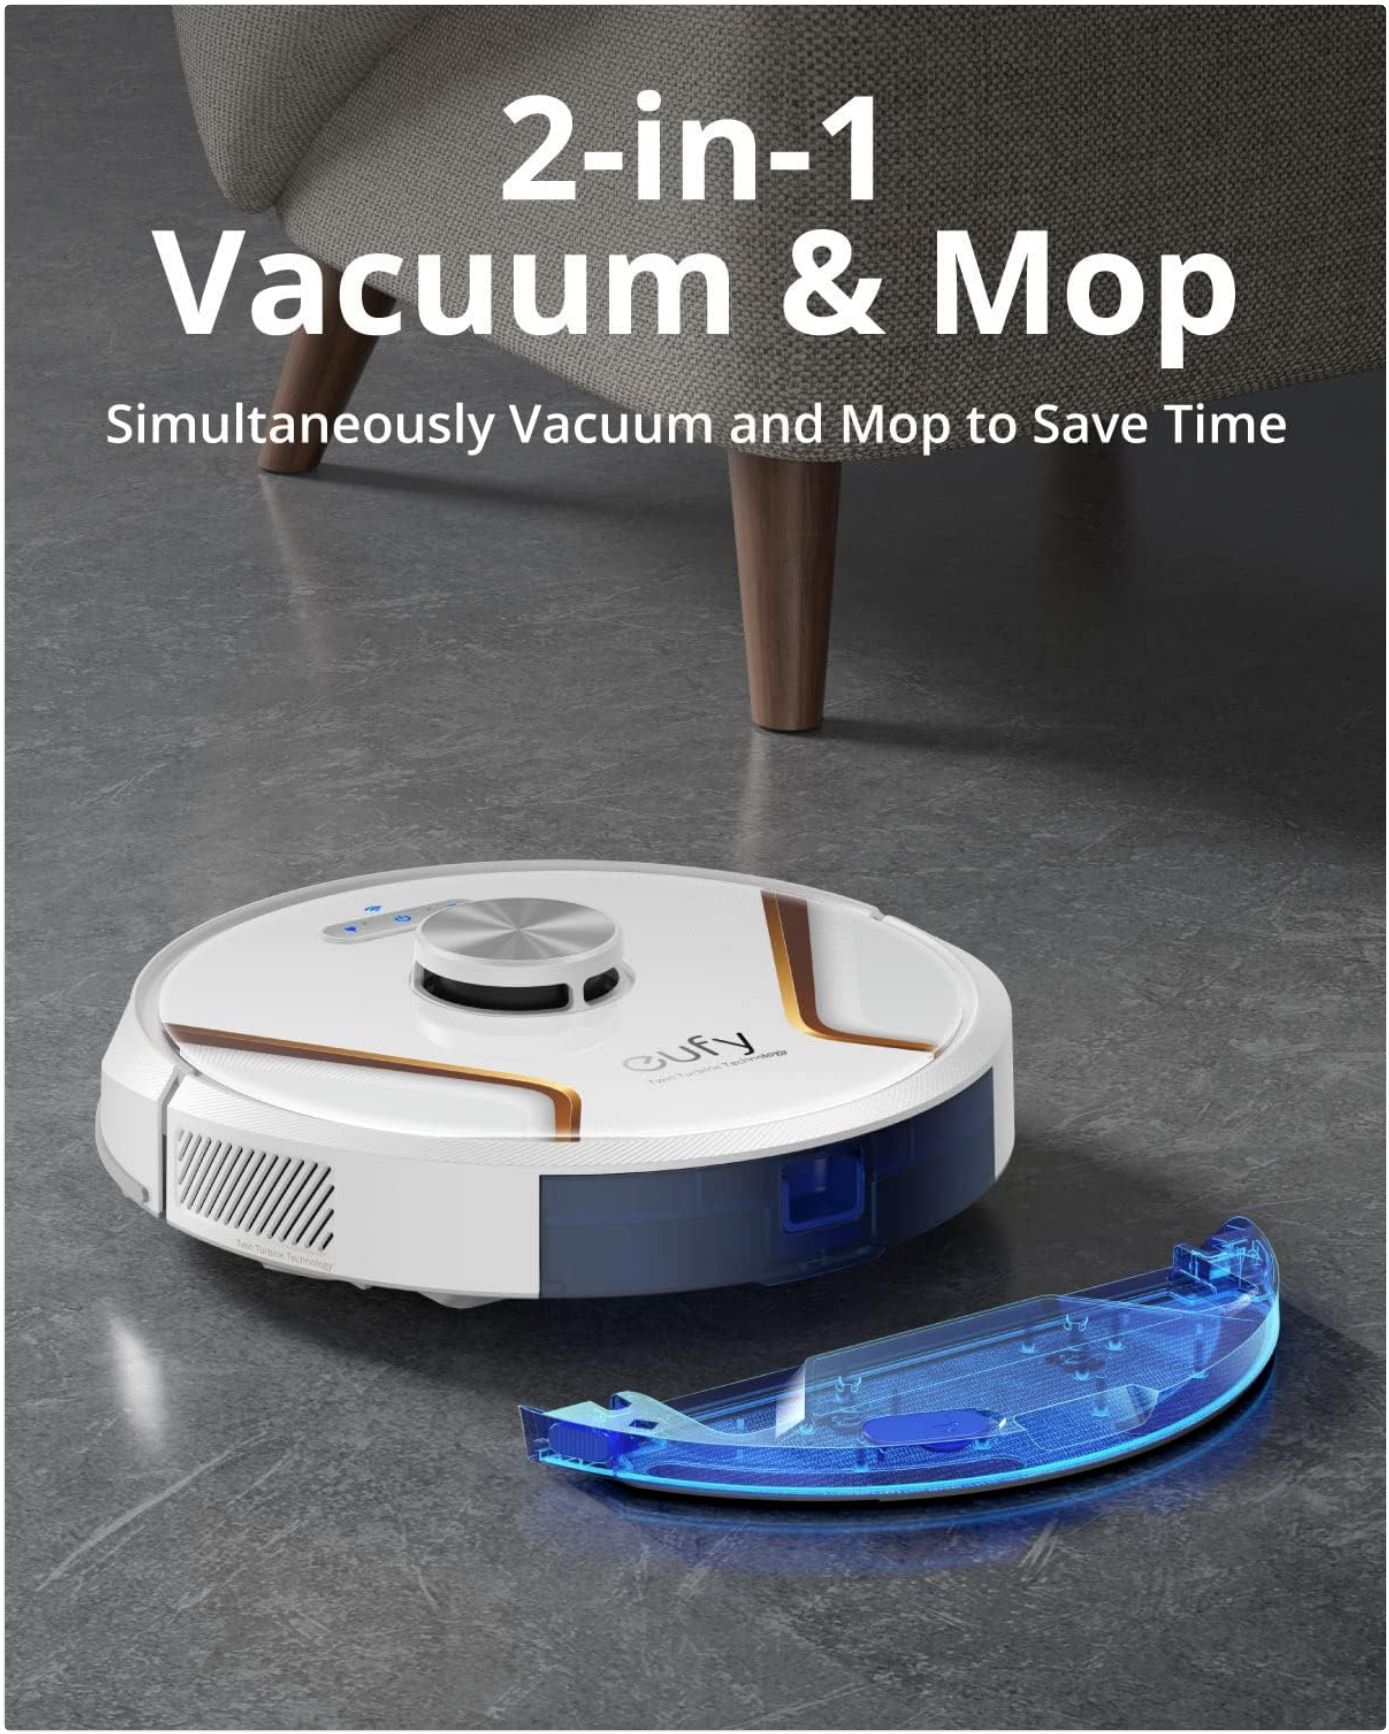


Image: The eufy RoboVac X8 Hybrid on a hard floor, with its transparent blue water tank and mop cloth attachment shown separately, highlighting its dual vacuum and mop function.

### iPath Laser Navigation and AI. Map 2.0

The iPath Laser Navigation system intelligently maps your home, allowing the RoboVac to clean efficiently and avoid obstacles in real-time. AI. Map 2.0 technology enables the RoboVac to memorize multi-floor maps and supports advanced features like no-go zones and zone cleaning.

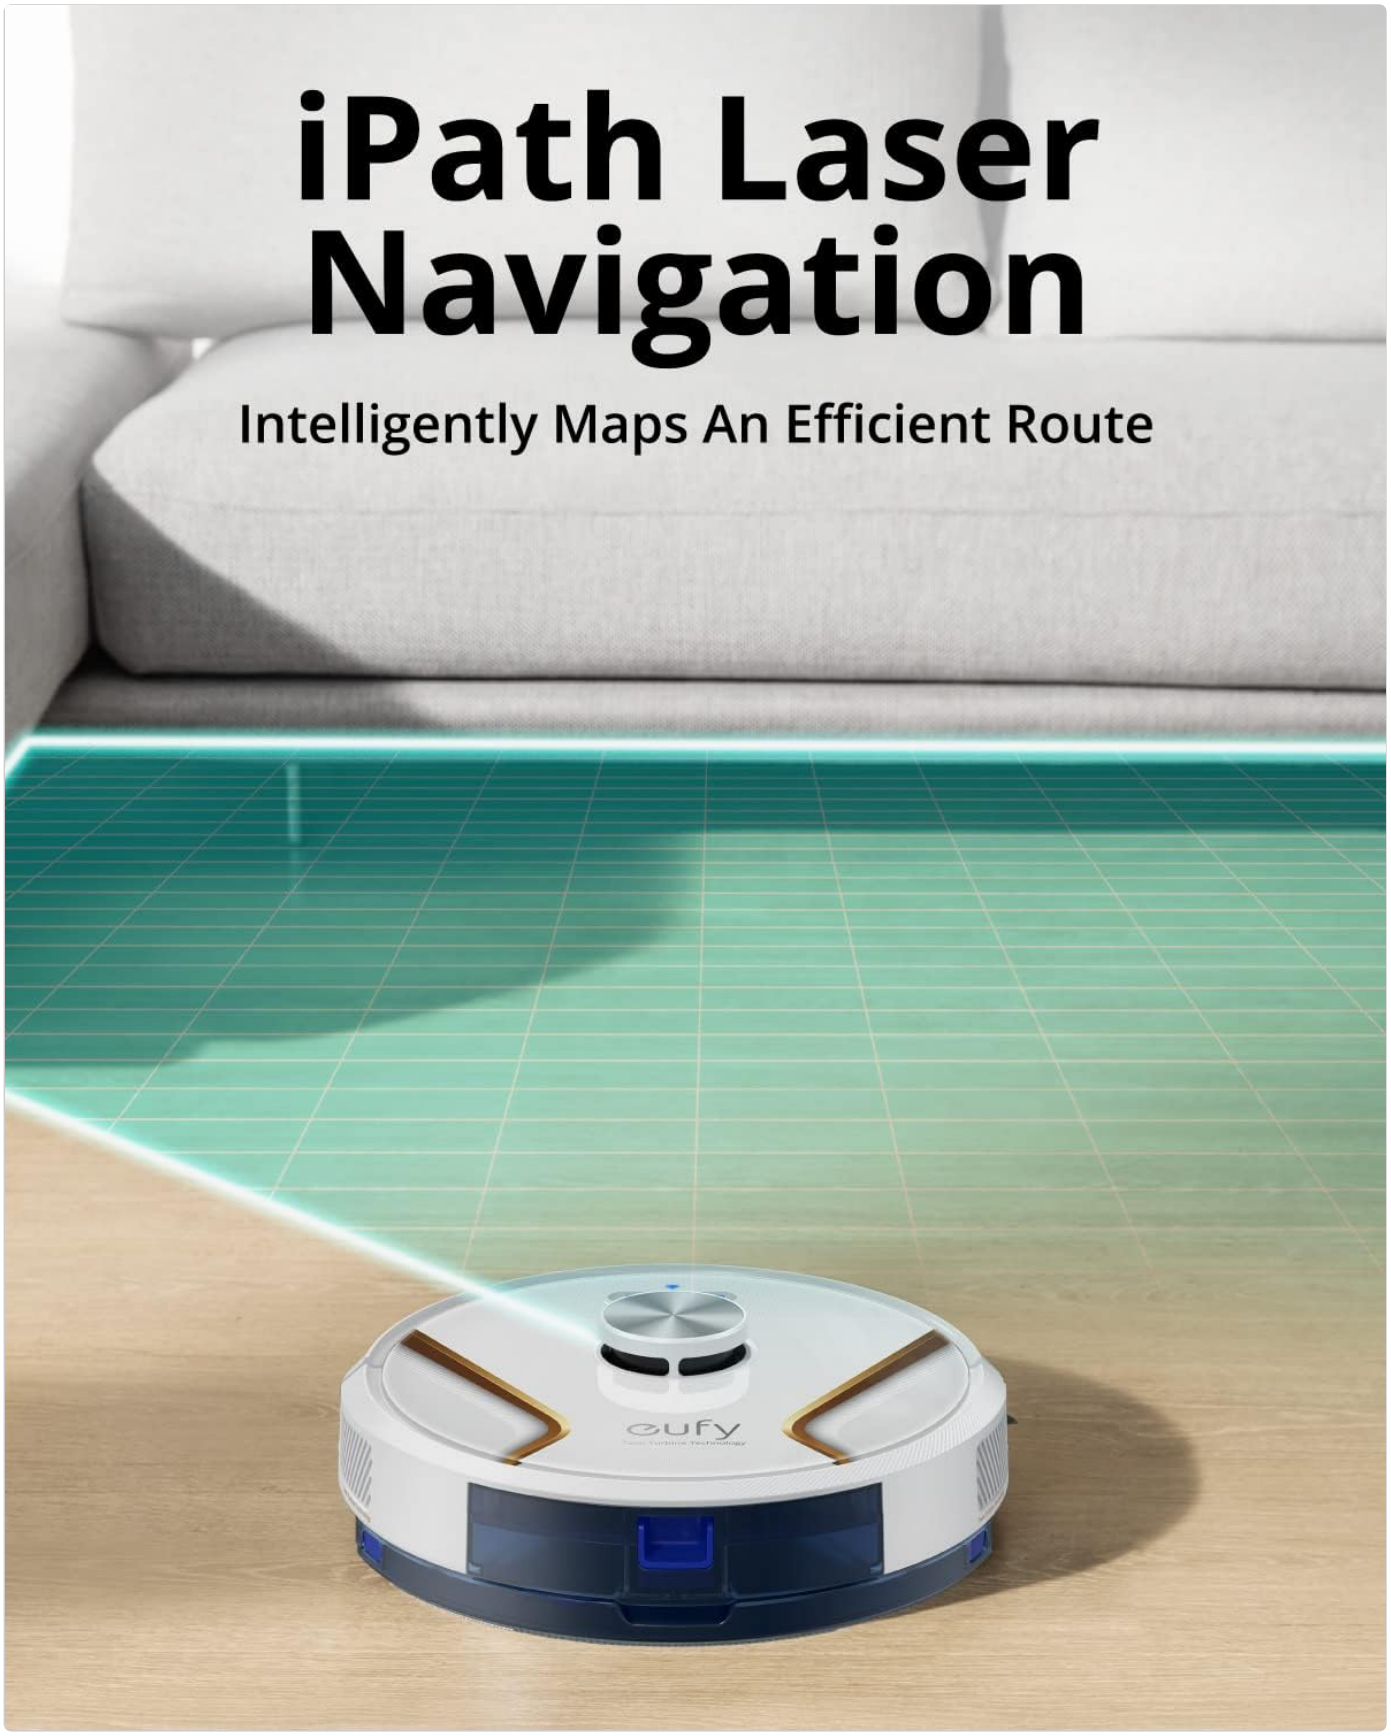



Image: The eufy RoboVac X8 Hybrid on a wooden floor, emitting a green laser grid to illustrate its iPath Laser Navigation system, which

helps it intelligently map and navigate the environment.




Image: A cutaway 3D model of a multi-story house, showing the eufy RoboVac X8 Hybrid mapping and cleaning different levels, demonstrating its AI. Map 2.0 multi-floor mapping capability.

## Twin-Turbine Technology

Equipped with Twin-Turbine Technology, the RoboVac X8 Hybrid generates powerful suction, making it highly effective at picking up debris, including pet hair, from various surfaces.

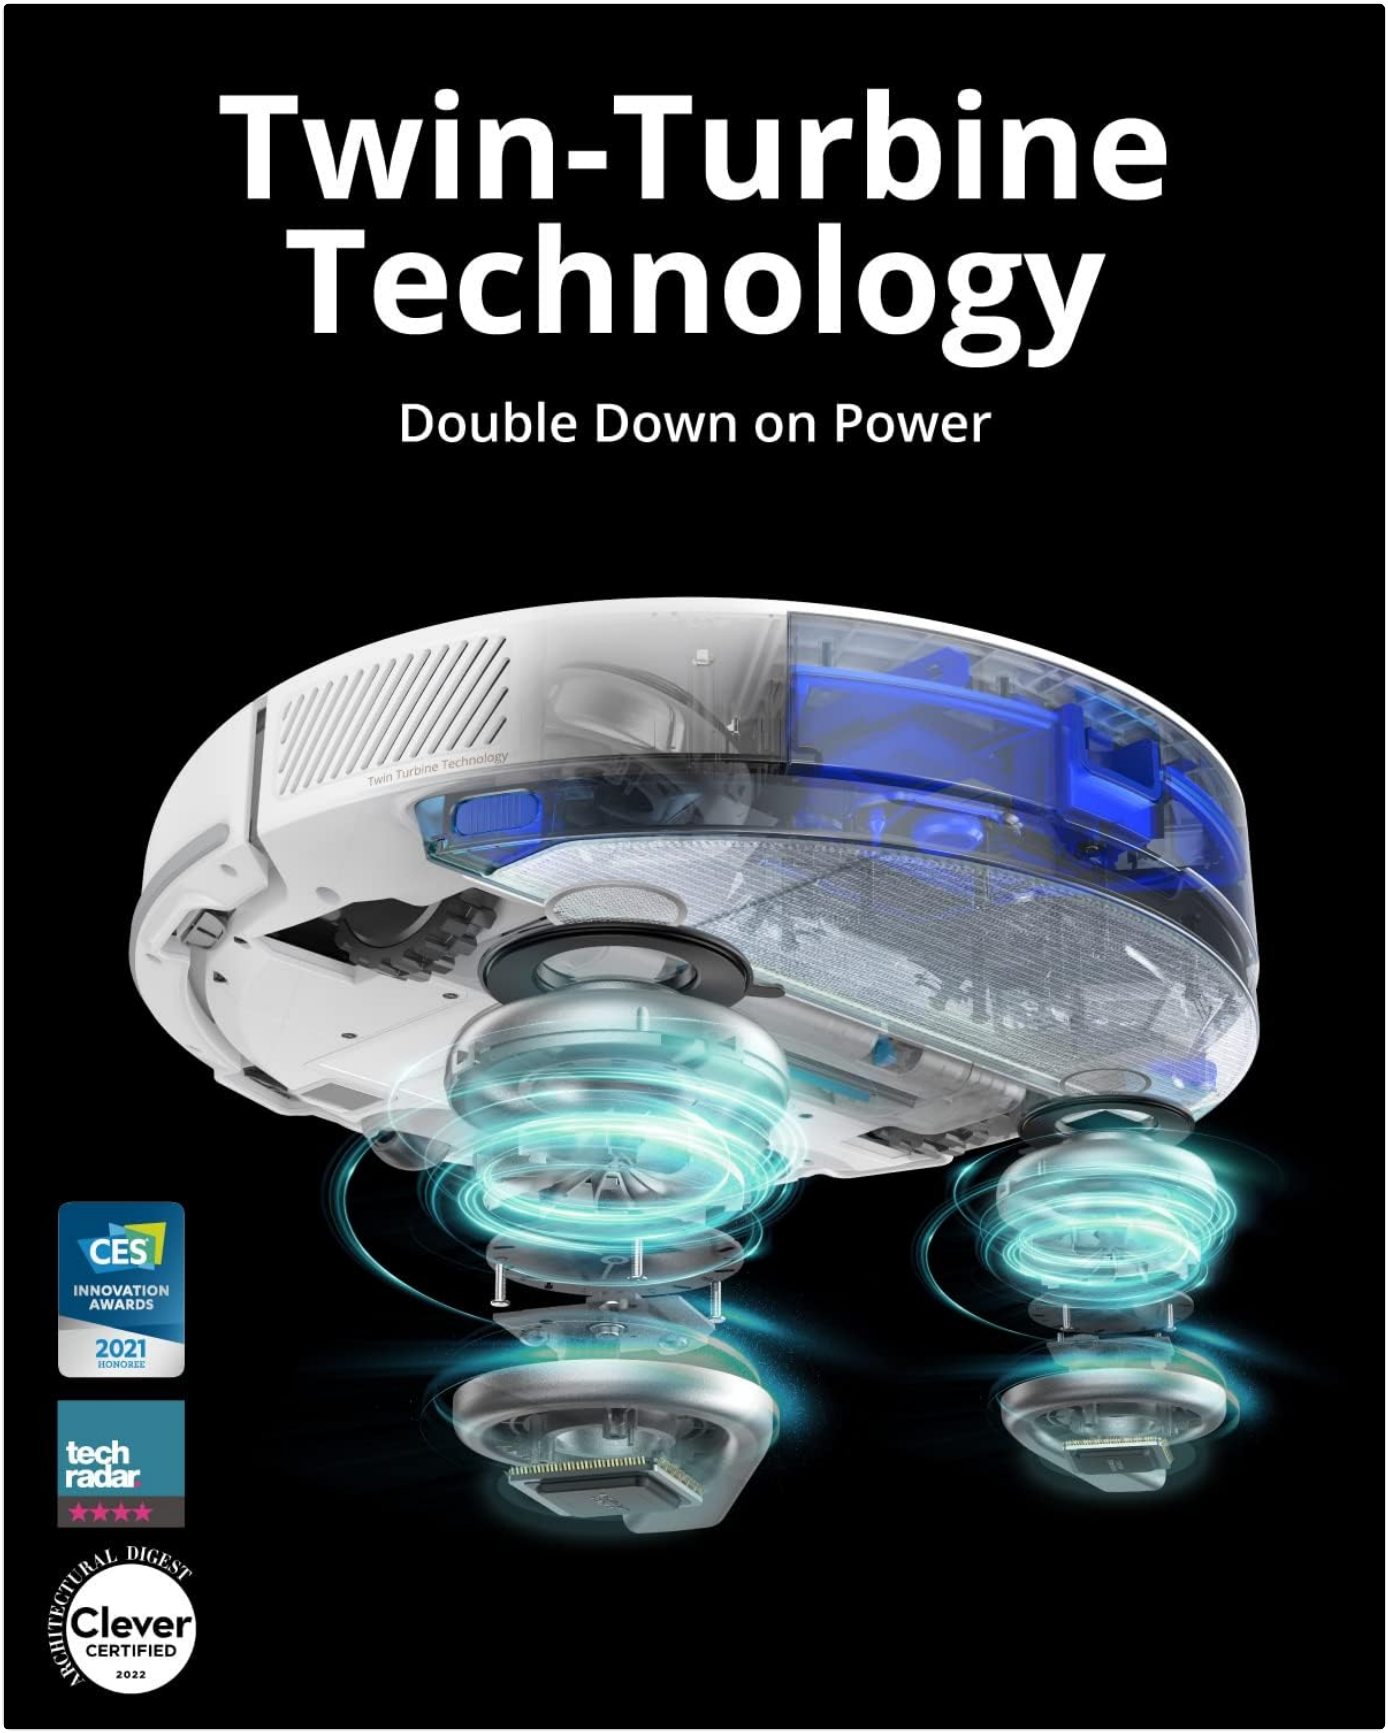



Image: An internal diagram of the eufy RoboVac X8 Hybrid, highlighting its Twin-Turbine Technology with two illuminated turbine components, emphasizing its powerful suction capabilities.

## Maintenance

Regular maintenance is crucial for optimal performance of your RoboVac. Always turn off the RoboVac and disconnect it from the charging base before performing any maintenance.

### Dust Collector and Filter

- Empty the dust collector after each use.
- Clean the filter regularly using the cleaning tool. Replace the filter every 3-6 months, depending on usage.



Image: A close-up view of the eufy RoboVac X8 Hybrid's integrated dust box, indicating its 400ml capacity.

### Main Rolling Brush

- Remove hair and debris from the main rolling brush weekly. Use the cleaning tool to cut and remove tangled hair.

### Side Brushes

- Check side brushes for damage or entanglement weekly. Clean them as needed. Replace if worn or damaged.

### Sensors and Charging Pins

- Wipe the drop sensors and charging pins on both the RoboVac and the charging base with a dry cloth monthly.

### Water Tank and Mop Cloth

- Empty and clean the water tank after each mopping session.
- Wash the mop cloth after each use. It can be hand-washed or machine-washed.

## Troubleshooting

| Problem | Possible Cause | Solution |
| --- | --- | --- |
| RoboVac does not turn on. | Battery is low or depleted. | Place RoboVac on the charging base and ensure it is fully charged. |
| RoboVac cannot charge. | Charging pins are dirty or obstructed. | Clean the charging pins on both the RoboVac and the charging base with a dry cloth. |
| RoboVac gets stuck frequently. | Too many obstacles or tangled wires. | Clear the cleaning area of loose cables, small objects, and thick carpets that may obstruct movement. Use no-go zones in the app. |

| Problem | Possible Cause | Solution |
|---|---|---|
| Poor cleaning performance. | Dust collector is full, filter is clogged, or brushes are tangled. | Empty the dust collector, clean or replace the filter, and clean the main rolling brush and side brushes. |
| RoboVac cannot connect to Wi-Fi. | Incorrect Wi-Fi password, router issues, or RoboVac is too far from router. | Ensure correct Wi-Fi password. Restart router and RoboVac. Move RoboVac closer to the router during setup. Check app for specific connection instructions. |

## Specifications

| Feature | Detail |
|---|---|
| Brand | eufy |
| Model Name | T2261 (RoboVac X8 Hybrid) |
| Special Feature | Bagless, iPath Laser Navigation, Twin-Turbine Technology, 2-in-1 Vacuum & Mop |
| Color | White |
| Product Dimensions | 13.58"L x 13.58"W x 3.85"H |
| Item Weight | 7 pounds |
| Included Components | Brush (main rolling brush), Water Tank, Mop Cloth, Charging Base, Power Adapter, Side Brushes, Filter, Cleaning Tool |
| Filter Type | Cartridge |
| Battery Life | Up to 160 minutes (vacuuming) |
| Dust Box Capacity | 0.25 Liters (400ml) |
| Power Source | Corded Electric (for charging base) |
| Batteries Included | Yes (1 Lithium Ion battery required, included) |
| Lithium Battery Voltage | 3.6 Volts (DC) |
| Compatible Devices | Google Home, Smartphones (via eufyHome app) |
| Form Factor | Robotic |
| UPC | 657768008238 |
| ASIN | B0BNNCY117 |
| Manufacturer | Eufy |
| Date First Available | August 2, 2022 |

## Warranty and Support

For warranty information, technical support, or service inquiries, please refer to the official eufy website or contact eufy customer support directly. Details regarding warranty coverage and terms are typically provided with the product documentation or available online.
You can often find support resources, FAQs, and contact information by visiting the official eufy support page or by searching for "eufy support" online.

© 2024 eufy. All rights reserved.
This manual is for informational purposes only. Product specifications and features are subject to change without notice.