Lapcare HT03XL

Lapcare HT03XL Laptop Battery User Manual

Model: HT03XL | Compatible with HP Pavilion 14-CE0000 Series

1. Introduction

This manual provides essential information for the safe and effective use of your Lapcare HT03XL laptop battery. Please read this guide thoroughly before installation and operation to ensure optimal performance and longevity of your battery.

2. Safety Information

WARNING: To reduce the risk of fire or burns, do not disassemble, crush, puncture, short external contacts, or dispose of in fire or water. Improper handling can lead to explosion, fire, or chemical burns.

- Use only with the specified laptop models.
- Do not expose to high temperatures (above 60°C / 140°F) or direct sunlight.
- Keep away from children.
- Do not store in damp or wet conditions.
- Dispose of used batteries according to local regulations.
- If the battery is damaged, swollen, or leaking, discontinue use immediately and contact support.

3. Product Overview

The Lapcare HT03XL is a high-quality Lithium-Ion rechargeable battery designed for specific HP Pavilion laptop models. It provides reliable power to keep your laptop running efficiently.



Image 3.1: Lapcare HT03XL Laptop Battery. This image shows the overall appearance of the battery, including regulatory markings and specifications printed on its label.

Key Features:

- High Quality Cells for stable performance.
- Overload Protection to prevent damage from excessive current.
- High quality PVC casing for durability.

Image 3.2: Key features of the Lapcare HT03XL battery, highlighting high-quality cells, overload protection, and durable PVC construction.

Compatibility:
This battery is compatible with HP Pavilion 14-CE0000 Series laptops, including but not limited to:

- HP Pavilion 14-ce1056wm
- HP Pavilion 14-ce0064st
- HP Pavilion 14-ce0006dx

- HP Pavilion 14-ce0025tu
- Pavilion 15-DA1030TU
- Notebook 15S-FQ0007UR
- Pavilion 14-CE0030UR
- Pavilion 14-CE3018TX
- Pavilion 14-CE3062TX
- Pavilion 14-CE3670ND
- Pavilion 14-CF0019NO
- Pavilion 14-CK0043TU
- Pavilion 14S-CF1013TUPavilion 15-CW0988NA
- Pavilion 15-DA0015NX



Image 3.3: A visual representation of the battery's compatibility with various HP Pavilion laptop models.

4. Setup (Installation)

Replacing a laptop battery requires careful handling. If you are unsure about the process, it is recommended to seek professional assistance.

1. **Power Off and Disconnect:** Completely shut down your laptop and disconnect it from the AC adapter. Remove any external devices.
2. **Discharge Residual Power:** Press and hold the power button for 15-20 seconds to drain any residual power from the system.
3. **Access Battery Compartment:** Depending on your laptop model, you may need to remove the back cover. Refer to your laptop's service manual for specific instructions on how to open the chassis.
4. **Remove Old Battery:** Carefully disconnect the old battery's cable from the motherboard. Unscrew any retaining screws holding the battery in place and gently lift it out.
5. **Install New Battery:** Place the new Lapcare HT03XL battery into the compartment. Ensure it fits correctly. Secure it with any screws that were removed.
6. **Connect Battery Cable:** Connect the new battery's cable securely to the motherboard connector.
7. **Reassemble Laptop:** Replace the back cover and secure it with screws.
8. **Initial Charge:** Connect the AC adapter and fully charge the new battery before its first use.

Note: *Always handle electronic components with care to avoid static discharge. Consider using an anti-static wrist strap.*

5. Operating Instructions

To maximize the performance and lifespan of your Lapcare HT03XL battery:

- **First Use:** Fully charge the battery before its initial use.
- **Charging Cycles:** For the first few cycles, allow the battery to discharge to about 10-15% before recharging it fully. This helps calibrate the battery meter.
- **Regular Use:** Avoid consistently discharging the battery to 0% or keeping it at 100% charge for extended periods when connected to AC power. Modern Li-ion batteries benefit from partial discharge and charge cycles.
- **Temperature:** Operate your laptop in a moderate temperature environment. Extreme heat or cold can degrade battery performance and life.

6. Maintenance

Proper maintenance can extend the life of your battery:

- **Storage:** If storing the battery for an extended period, charge it to about 50-60% and store it in a cool, dry place. Avoid storing a fully charged or completely discharged battery.
- **Cleaning:** Keep the battery contacts clean using a dry, lint-free cloth.
- **Software Updates:** Ensure your laptop's operating system and drivers are up to date, as power management features can impact battery health.

7. Troubleshooting

If you encounter issues with your Lapcare HT03XL battery, consider the following:

Problem	Possible Cause	Solution
Battery not charging	Loose connection, faulty AC adapter, driver issue, or battery defect.	Ensure battery cable is securely connected. Test with a known good AC adapter. Update or reinstall battery drivers in Device Manager. If problem persists, contact support.
Short battery life	High power consumption, background applications, screen brightness, or battery degradation.	Adjust power settings to "Balanced" or "Power Saver". Close unnecessary background applications. Reduce screen brightness. Check battery health report (Windows: powercfg /batteryreport).
Battery not recognized	Improper installation, driver issue, or compatibility problem.	Re-seat the battery, ensuring all connections are firm. Update or reinstall battery drivers. Verify battery compatibility with your specific laptop model.

8. Specifications

Technical details for the Lapcare HT03XL Laptop Battery:

- **Model:** HT03XL
- **Battery Cell Composition:** Lithium Ion (Li-ion)
- **Battery Capacity:** 3600 mAh (Milliamp Hours)
- **Voltage:** 11.4 Volts
- **Number of Cells:** 3 Cell
- **Reusability:** Rechargeable
- **Item Weight:** Approximately 250 Grams
- **Compatible Devices:** HP Pavilion 14-CE0000 Series and other listed models.

- **Country of Origin:** China

Image 8.1: Visual representation of key battery specifications including voltage, capacity, and cell count.

Image 8.2: Illustration of the battery's physical dimensions (measurements in millimeters).

9. Warranty and Support

Lapcare products are covered by a limited warranty. Please review the terms and conditions carefully.
Warranty Terms & Conditions:

1. Lapcare product covered under LPP (Lapcare Protection Plan) carry a non-transferable limited warranty option for products pre-registered on the Lapcare website, within 1 month from the date of purchase.
2. The claim should accompany an invoice of an authorized channel partner, within 48 hours of the incident (damage).
3. The defective Lapcare product should be under warranty, without any physical damage and should be deposited to a Lapcare service center without any repair/disassembling attempts in the midst.
4. Under LPP the company's liability for damages to a maximum of Rs. 20,000.
5. For more information, please refer to the detailed LPP Terms & Conditions on the official Lapcare website.

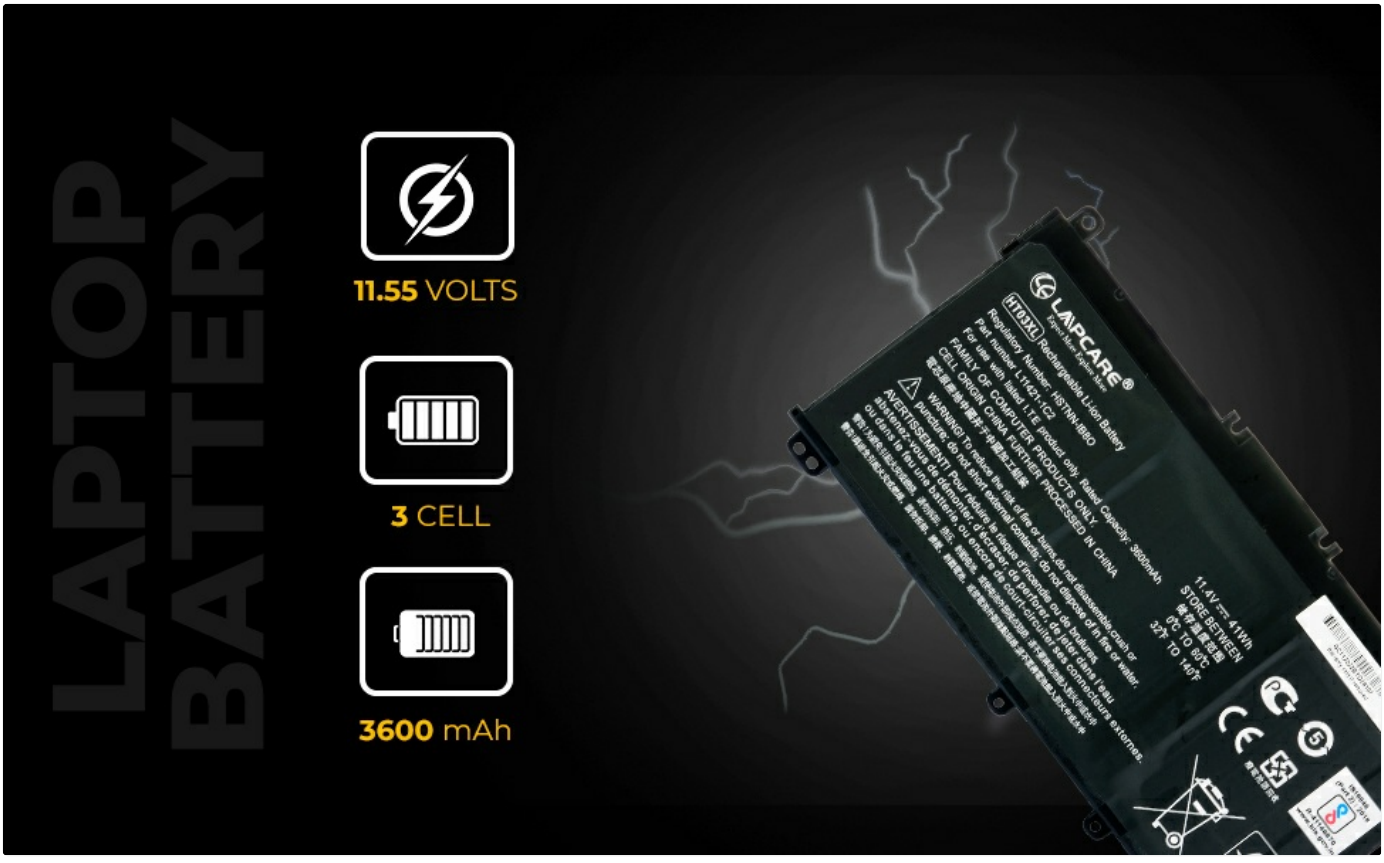


Image 9.1: Detailed warranty terms and conditions for Lapcare products, including registration requirements and liability limits.

For further assistance or to register your product, please visit the official Lapcare website or contact their customer support.
Seller Information:
This product was sold by **SP Infotech®**. For order-specific inquiries, please contact the seller directly through your Amazon purchase history.

© 2026 Lapcare. All rights reserved. Information in this manual is subject to change without notice.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question