Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

Silvergear 290

Silvergear Small Safe with Electronic Lock

Model: 290

1. Product Overview

The Silvergear Small Safe is designed to provide secure storage for your valuables, such as money, jewelry, and important documents. It features a robust steel construction, an electronic keypad for personalized access codes, and a backup key system for emergency entry. Its compact size allows for discreet placement in various environments, including homes, offices, and hotels.



Image: The Silvergear Small Safe with its door open, revealing various items like a passport, credit cards, and keys stored securely inside.



Image: Visual examples of the Silvergear safe placed in various common locations: a home living room, a bedroom nightstand, a hotel cabinet, and an office desk, demonstrating its versatility.

2. Safety Information

- Do not store emergency keys inside the safe. Keep them in a secure, separate location.
- Ensure the safe is placed on a stable, level surface or securely mounted to a wall or floor to prevent tipping.
- Keep the safe away from excessive moisture or extreme temperatures.
- Do not attempt to force the safe open if the electronic lock malfunctions. Use the emergency keys.
- Replace batteries promptly when the low battery indicator (red light) appears to ensure continuous operation.

3. Package Contents

Please check the package to ensure all components are present:

- 1 x Silvergear Small Safe

- 2 x Emergency Keys
- Mounting Hardware (screws and anchors)
- 1 x Instruction Manual



Image: A visual representation of the items included in the product package, along with the safe's external dimensions.

4. Setup

4.1. Installing Batteries

The safe requires 4 x AA 1.5V batteries (not included). To install:

1. Open the safe door using one of the emergency keys.
2. Locate the battery compartment on the inside of the door.
3. Insert 4 AA batteries, ensuring correct polarity (+/-).
4. Close the battery compartment cover.

4.2. Setting Your Personal Code

Upon first use or after battery replacement, you will need to set your personal code (3 to 8 digits).

1. With the safe door open, press the red reset button located on the inside of the door, near the hinge. You will hear a beep.
2. Within 5 seconds, enter your desired 3 to 8 digit code on the keypad.
3. Press the 'E' button to confirm. You will hear a confirmation beep.
4. Test your new code with the door open first to ensure it works correctly.

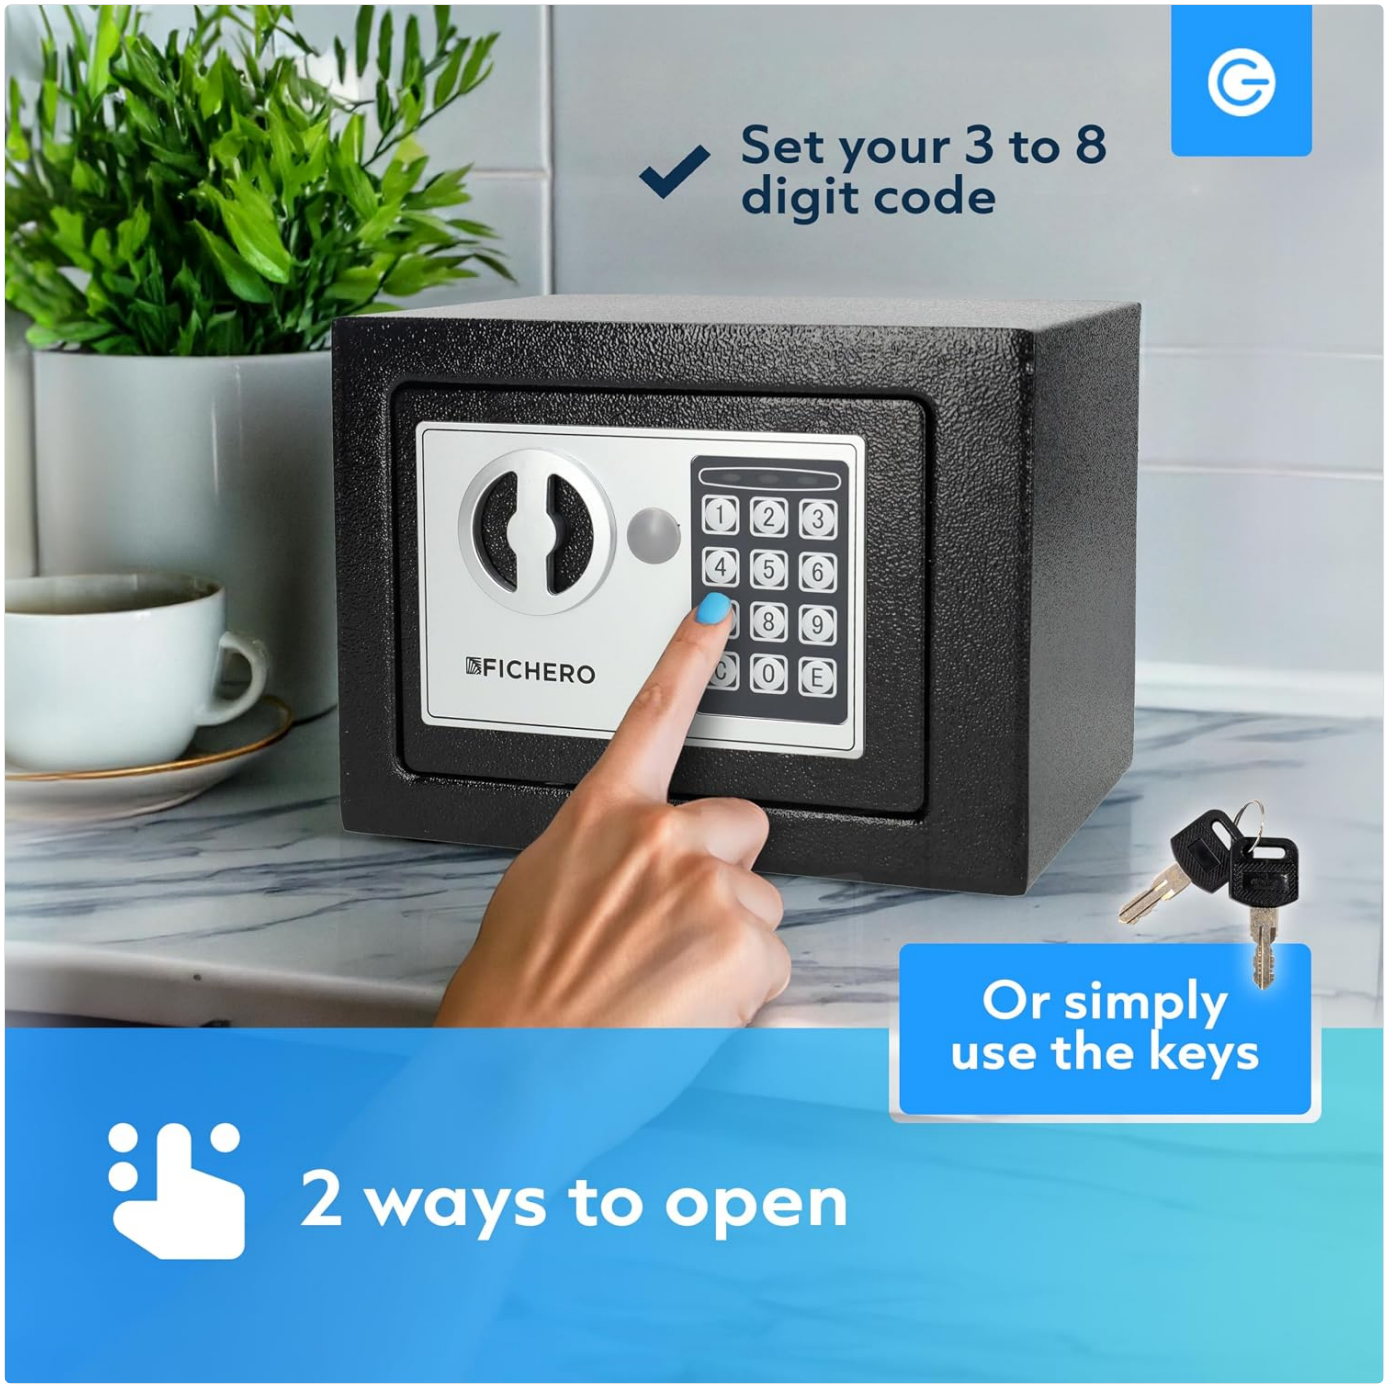


Image: A user's hand interacting with the electronic keypad to set a personal code, highlighting the dual access options (code or keys).

4.3. Mounting the Safe (Optional)

For enhanced security, the safe can be mounted to a wall or floor using the provided hardware.

1. Identify a suitable location for mounting.
2. Open the safe door and locate the pre-drilled mounting holes on the back or bottom panel.

3. Mark the drilling points on the wall or floor through these holes.
4. Drill pilot holes using an appropriate drill bit for your surface.
5. Align the safe with the drilled holes and secure it using the provided screws and anchors.



Image: A person demonstrating the installation of the safe into a cabinet, emphasizing the option to secure it to a wall or floor for added security.



Image: An exploded view diagram illustrating the key components of the safe, including the location of the wall-mounting hardware holes.

5. Operating the Safe

5.1. Opening with Your Code

1. Enter your 3 to 8 digit personal code on the keypad.
2. Press the 'E' button.
3. If the code is correct, the green indicator light will illuminate. Turn the master knob clockwise within 5 seconds to open the door.

5.2. Opening with Emergency Keys

In case you forget your code or the batteries are depleted, you can use the emergency keys.

1. Locate the hidden key lock cover on the electronic panel.
2. Gently remove the cover.

3. Insert one of the emergency keys into the keyhole and turn it counter-clockwise while simultaneously turning the master knob clockwise to open the door.

5.3. Understanding Indicator Lights

The safe features three indicator lights to communicate its status:

- **Green Light:** Indicates the safe is open or the code has been successfully entered.
- **Red Light:** Indicates low battery. Replace batteries immediately.
- **Yellow Light:** Indicates a warning, such as an incorrect code entry.

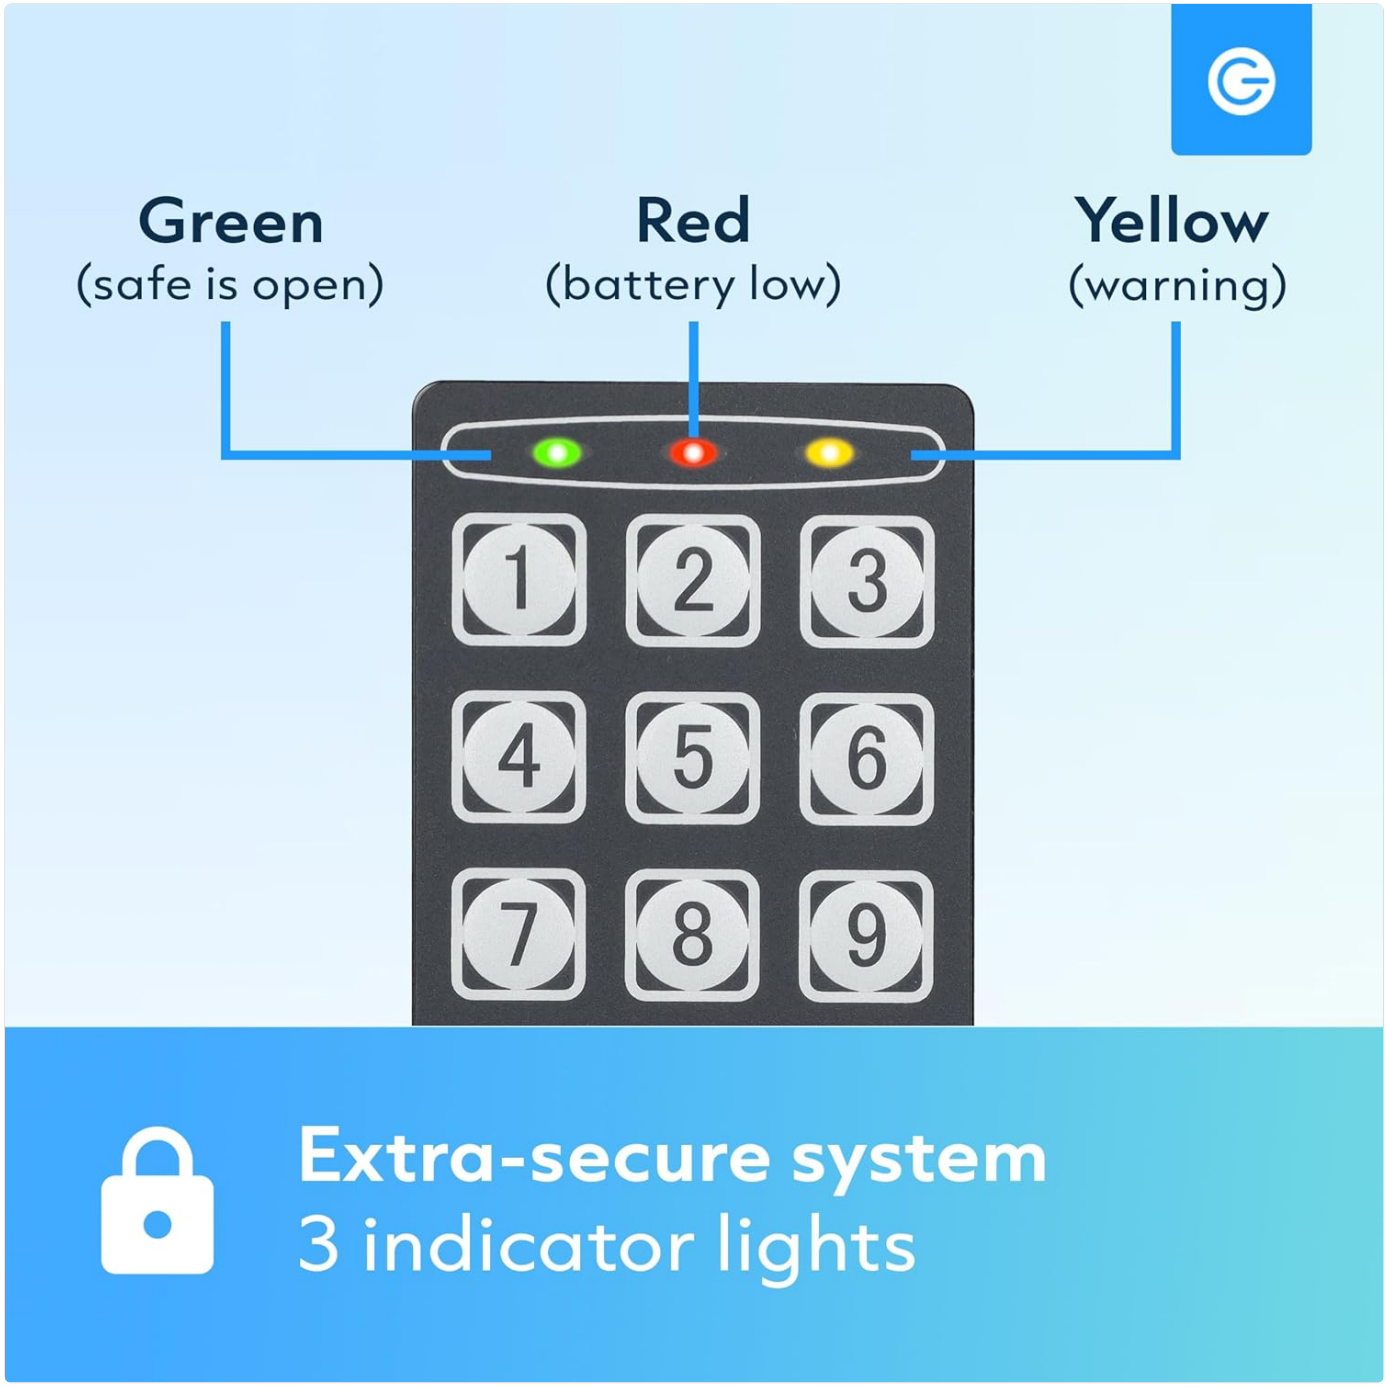


Image: A clear diagram explaining the meaning of the green, red, and yellow indicator lights on the safe's keypad.

6. Maintenance

6.1. Battery Replacement

When the red indicator light illuminates, it's time to replace the batteries. Follow the steps in Section 4.1. Always use 4

new AA 1.5V batteries.

6.2. Cleaning

Clean the exterior of the safe with a soft, damp cloth. Do not use abrasive cleaners or solvents, as they may damage the finish or electronic components.

7. Troubleshooting

- **Safe does not open with code:**
  - Ensure batteries are not low (check red indicator light). Replace if necessary.
  - Verify you are entering the correct code. Try re-entering slowly and carefully.
  - If the code is forgotten, use the emergency keys to open the safe and reset the code (refer to Section 4.2).
- **Keypad is unresponsive:**
  - Check battery installation and ensure they are fresh.
  - If still unresponsive, use the emergency keys to open the safe.
- **Door does not close properly:**
  - Ensure nothing is obstructing the door or the locking bolts.
  - Check if the master knob is fully turned to the locked position.

8. Specifications

Feature	Detail
Brand	Silvergear
Model Number	290
Material	Alloy Steel
Color	Black
Lock Type	Electronic Combination Lock, Key
Code Digits	3 to 8 Digits
Capacity	4.5 Liters
Product Dimensions (Outer)	17D x 23W x 17H Centimetres
Item Weight	100 g (Note: Product description states 2.5 kg, this might be a discrepancy in provided data. Please refer to product packaging for accurate weight.)
Batteries Required	4 x AA 1.5V (not included)



Image: Detailed diagram illustrating the outer and inner dimensions of the safe, along with its capacity and weight.

9. Warranty and Support

For warranty information or technical support, please refer to the contact details provided on your product packaging or the official Silvergear website. Keep your purchase receipt as proof of purchase.

10. Official Product Videos

No official product videos from the seller are available for this item at this time.

© 2025 Silvergear. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B0BPJZSR61

More documents and user manuals: **https://manuals.plus/**